
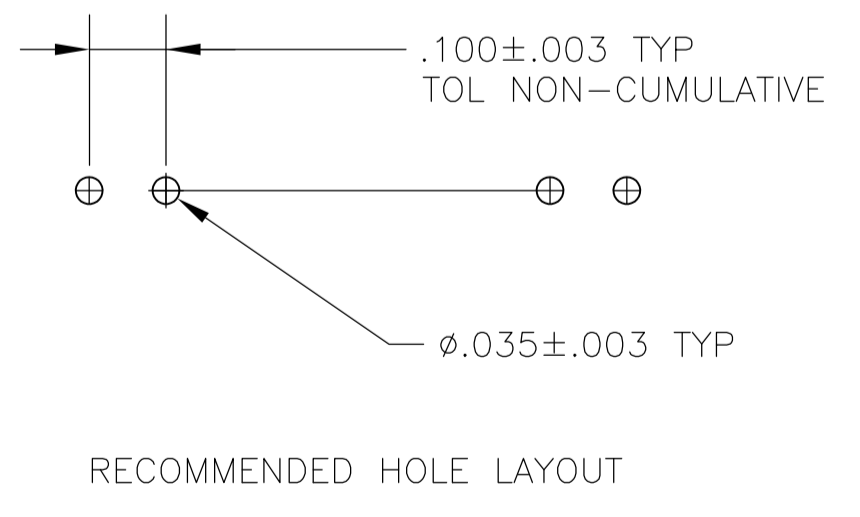


LOC		DIST		REVISIONS				
AD	00	REV	PER	DESCRIPTION	DATE	OWN	APVD	
J		REVISED	PER	ECO-14-000068	26APR2014	NK	MM	

- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD LAT AGAINST THE PRINTED CIRCUIT BOARD
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 PARTS PACKAGED IN GPAX
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

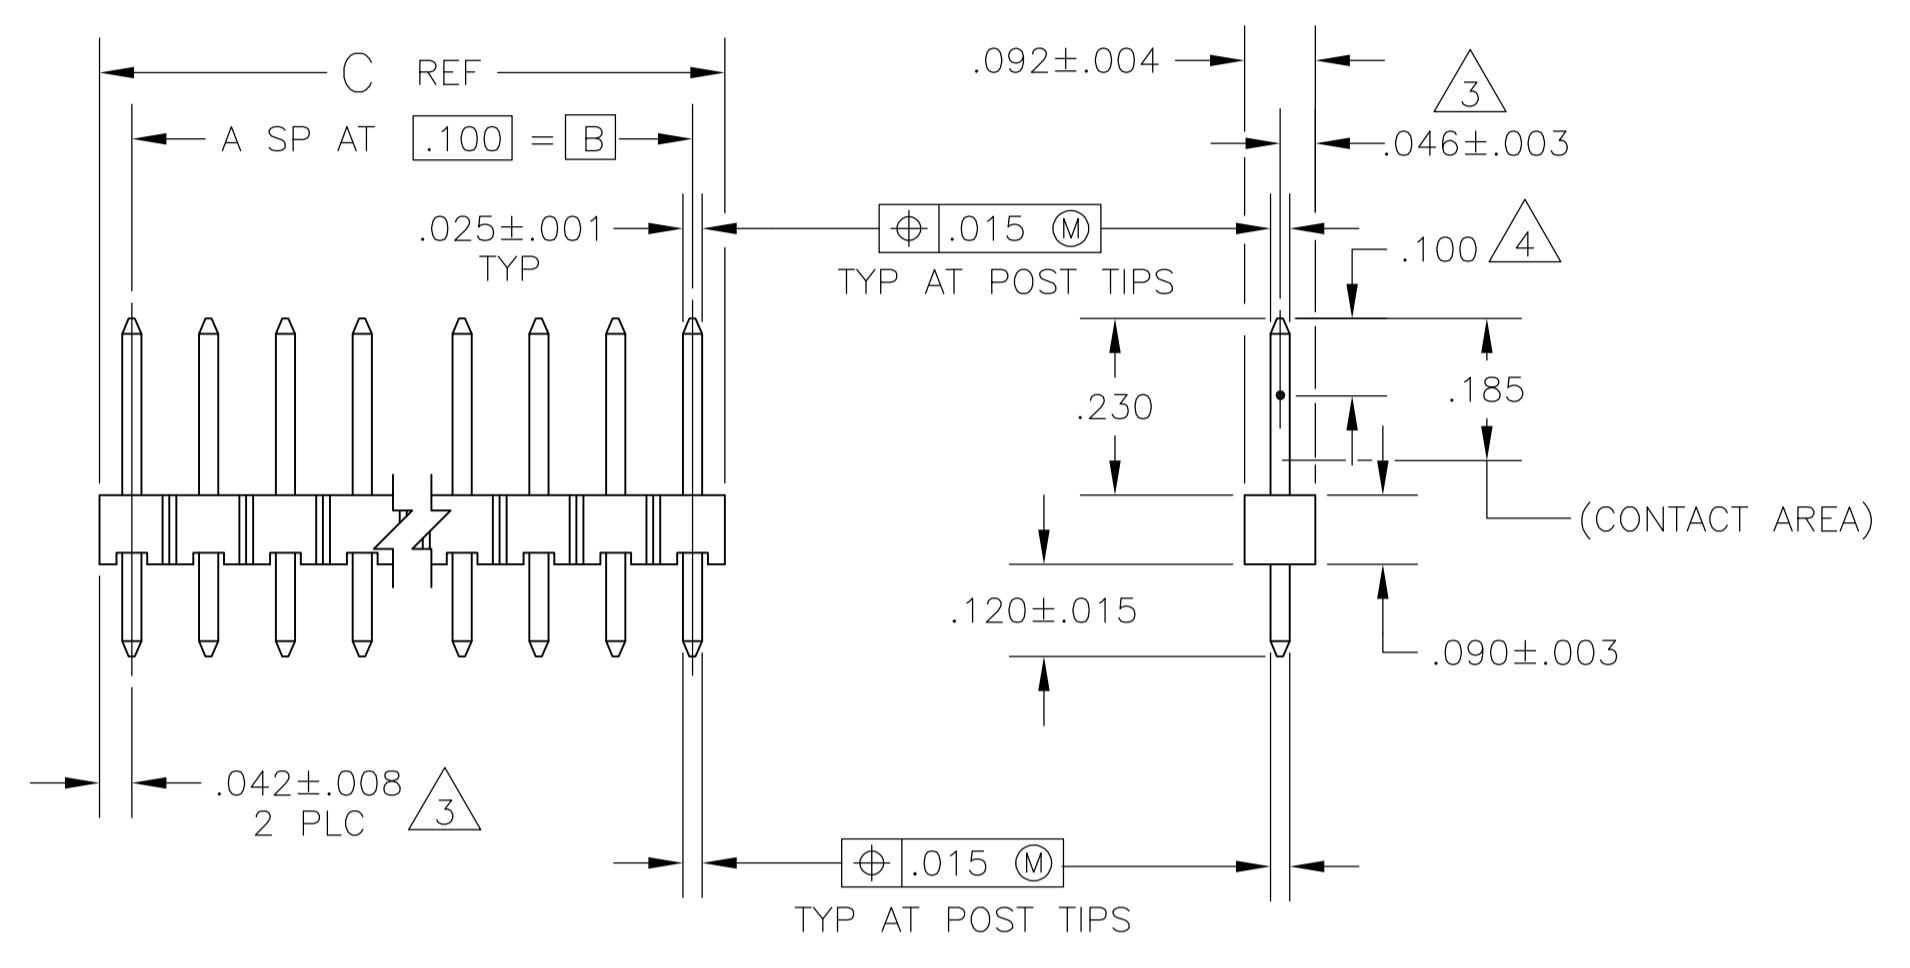

REV	PER	DESCRIPTION	DATE	OWN	APVD
3		ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS			
2		TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD LAT AGAINST THE PRINTED CIRCUIT BOARD			
1		ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS			

REV	PER	DESCRIPTION	DATE	OWN	APVD
3		ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS			
2		TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD LAT AGAINST THE PRINTED CIRCUIT BOARD			
1		ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS			

REV	PER	DESCRIPTION	DATE	OWN	APVD
3		ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS			
2		TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD LAT AGAINST THE PRINTED CIRCUIT BOARD			
1		ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS			

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0. PLC	± .005
1. PLC	± .005
2. PLC	± .005
3. PLC	± .005
4. PLC	± .005
ANGLES	± .005

MATERIAL: HOUSING: FLAME RESISTANT THERMOPLASTIC COLOR: BLACK POSTS: COPPER ALLOY

FINISH: POSTS: .00020 GOLD ON CONTACT AREA .00010-00005 WHITE TIN LEAD ON SOLDER TAIL, ALL OVER .00020 NICKEL

DIN H MOLL 13OCT87  
CHK T. CLARK 20OCT87  
APVD T. CLARK 20OCT87

NAME: HEADER ASSY, MOD II, BREAKAWAY, SINGLE ROW, .100CL, VERTICAL, WITH .025 SQUARE POSTS

APPLICATION SPEC: —

SIZE: A1

WEIGHT: —

RESTRICTED CUSTOMER

SCALE: 4:1

SHEET 1 OF 1

REV J