


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
--	REVISED	7/27/94	BB

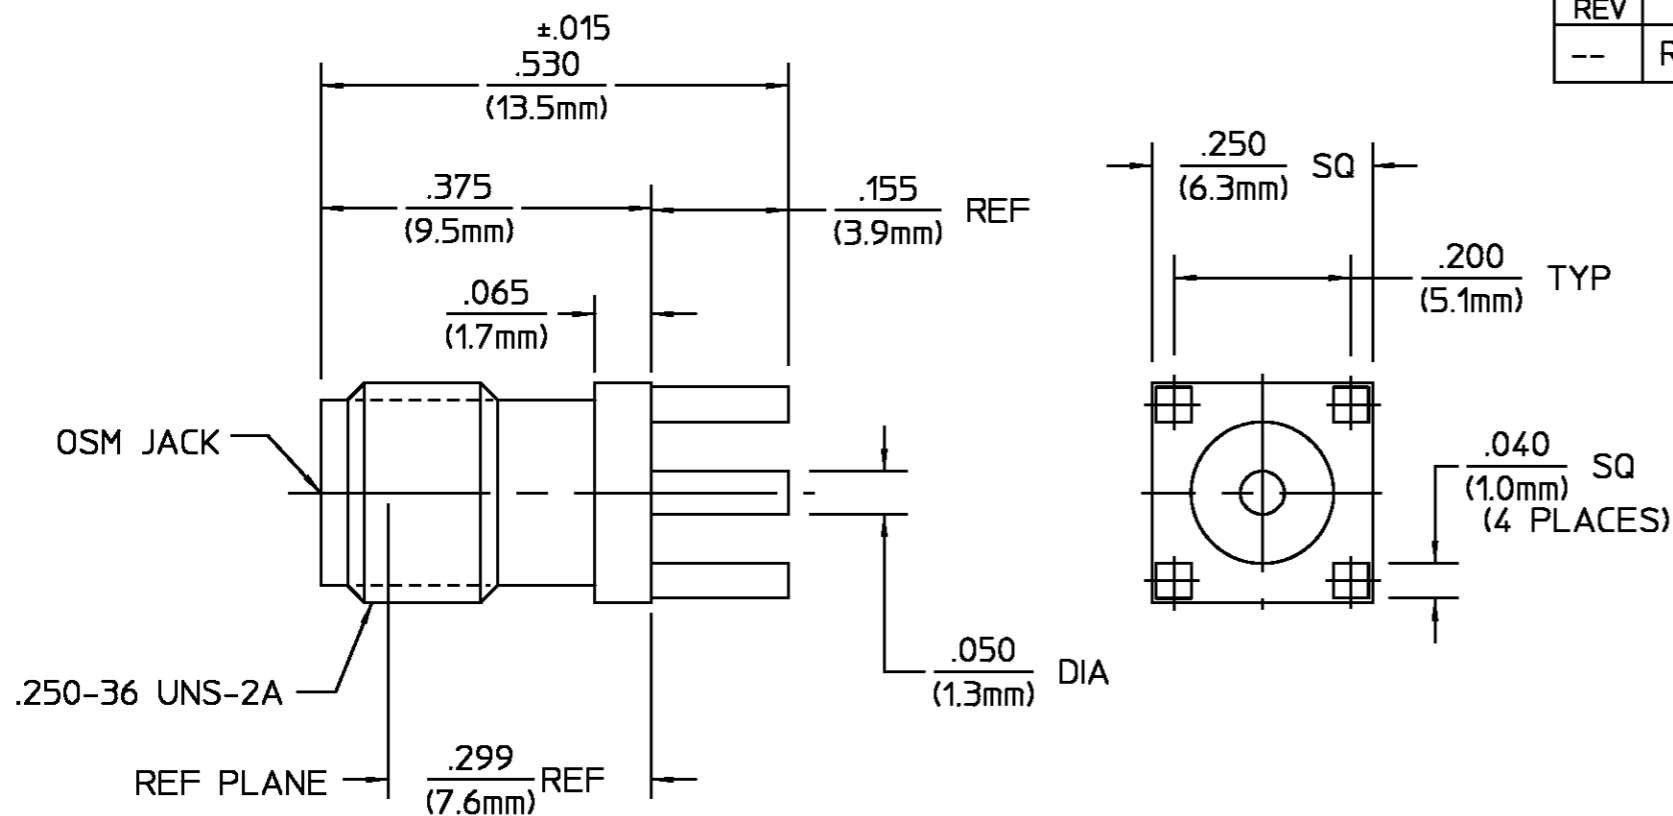

ELECTRICAL	MECHANICAL	ENVIRONMENTAL	HOUSING	MATERIAL	FINISH
Nominal Impedance (Ohms) <u>50</u>	Interface Dimensions MIL-STD-348A, Fig. <u>310.2</u>	Temperature Rating <u>-65°C To +125°C</u>	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	GOLD PLATE PER MIL-G-45204	
Frequency Range (GHz) DC to <u>18</u>	Recommended Mating Torque <u>N/A</u>	Vibration MIL-STD-202, Method 204, Condition D	DIELECTRIC TFE FLUOROCARBON PER ASTM-D-1457	N/A	
Volt Rating (VRMS MAX) @ Sea Level <u>335</u>	Mating Characteristics: Insertion (MAX Lbs) <u>3.0</u>	Shock MIL-STD-202, Method 213, Condition I	CENTER CONTACT BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204	
VSWR <u>N/A</u>	Withdrawal (MIN Oz) <u>1.0</u>	Thermal Shock MIL-STD-202, Method 107, Condition B	COMPONENT		
Insertion Loss (dB MAX) <u>N/A</u>	Force to Engage and Disengage (In-Lbs MAX) <u>2.0</u>	Moisture Resistance MIL-STD-202, Method 106	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599	
RF Leakage (dB MIN) <u>N/A</u>	Center Contact Captivation: Axial (Lbs) <u>6.0</u>	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray	TOLERANCE ON	FRAC. DEC. ANGLES	
Corona, 70,000 Ft (VRMS MIN) <u>250</u>	Cable Retention: Axial Force (Lbs) <u>N/A</u>		± 1/64 ±.005 ± °	DATE 8/26/82	
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level <u>1000</u>	Torque (In-Oz) <u>N/A</u>		DRN BY DAN CASTRO	CHEK BY GJ	
Contact Resistance (Milliohms MAX): Center Contact <u>3.0</u>	Weight (Grams) <u>1.3</u>		DATE 9/14/82	APPD BY RME	
Outer Contact <u>2.0</u>					
Cable to Housing <u>N/A</u>					
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) <u>670</u>					
I.R.(Megohms MIN) <u>5,000</u>					
			USE ASS'Y PROCEDURE	TITLE OSM PRINTED WIRING BOARD JACK RECEPTACLE - STRAIGHT TERMINAL (M39012/93-3001)	
			NO. AP. <u>N/A</u>	SIZE B	CODE IDENT NO. 26805
				SCALE 5:1	2062-8001-90
					REV 02
					SHEET 1 OF 1

CUSTOMER DRAWING

AMP PART # 1053372-1
SHEET 1 OF 1 REV A