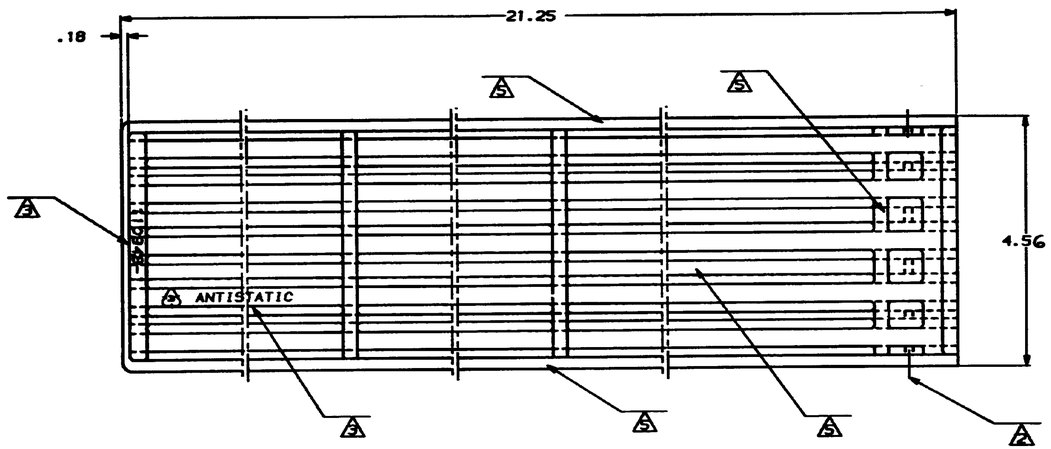

NOTE:

1. BOW NOT TO EXCEED .13 INCH OVER LENGTH OF TUBE.
2. METHOD OF CLOSURE TO BE NYLON ROD.
3. MOLD "110948-1" AND "ANTISTATIC" & RECYCLE SYMBOL IN .18 HIGH CHARACTERS LOCATED APPROX. AS SHOWN.
4. ALL RADII TO BE .06 MAX.
5. RADIO FREQUENSY WELD AS SHOWN.
6. MATERIAL TO BE ANTISTATIC PER AMP SPEC 115-59.

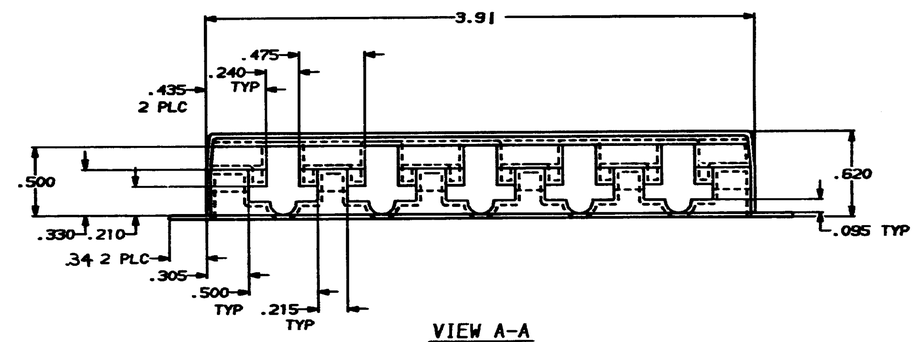

VIEW A-A
SCALE: 2:1

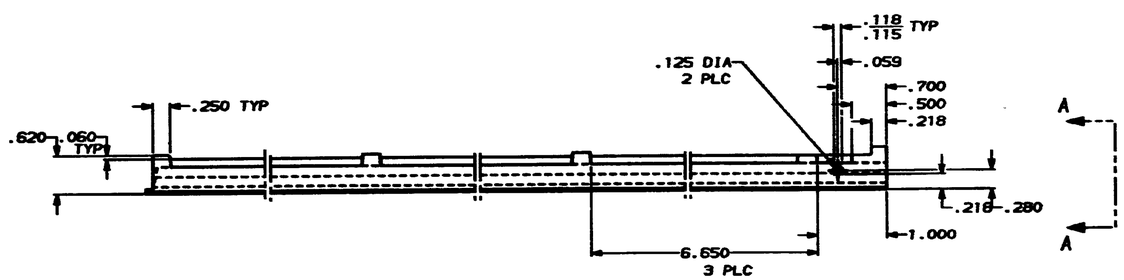

QTY REQD PER ASSY	PART NO	DESCRIPTION	FINISH NO
REVISION OF EACH ASSY NO GIVEN BLANK, USE DWG REVISIONS			

PARTS LIST

MATERIAL	HEAT TREAT	FINISH
.030 PVC	—	SEE NOTES

DIMENSIONS IN INCHES.
DO NOT SCALE PRINT.
TOLERANCES UNLESS OTHERWISE SPECIFIED.
2 PLC DEC ±.03
3 PLC DEC ±.015
4 PLC DEC ±-
ANGLES ± 0 ° 15'
SURF TEXTURE: √
REMOVE BURRS, BREAK SHARP EDGES .015 R MAX

DR 20 AUG 1990 R.E. BOHRBAUGH
APP
REL

AMP Incorporated Harrisburg, PA 17105-3608

TITLE GANG OF TUBES, MODU SURF MT W/BARBS

SCALE 1:1 | D | DWG NO 110948 | SHEET 1 of 1 | REV 0

P	F	LTR	REVISION RECORD	APP	DATE

LOC DX
DIST 30

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT YOU NOTIFY AUTHORIZATION PRIOR AMP TRANSMITTED, HARRISBURG, PA. WITHOUT