

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
U	-	-	-				

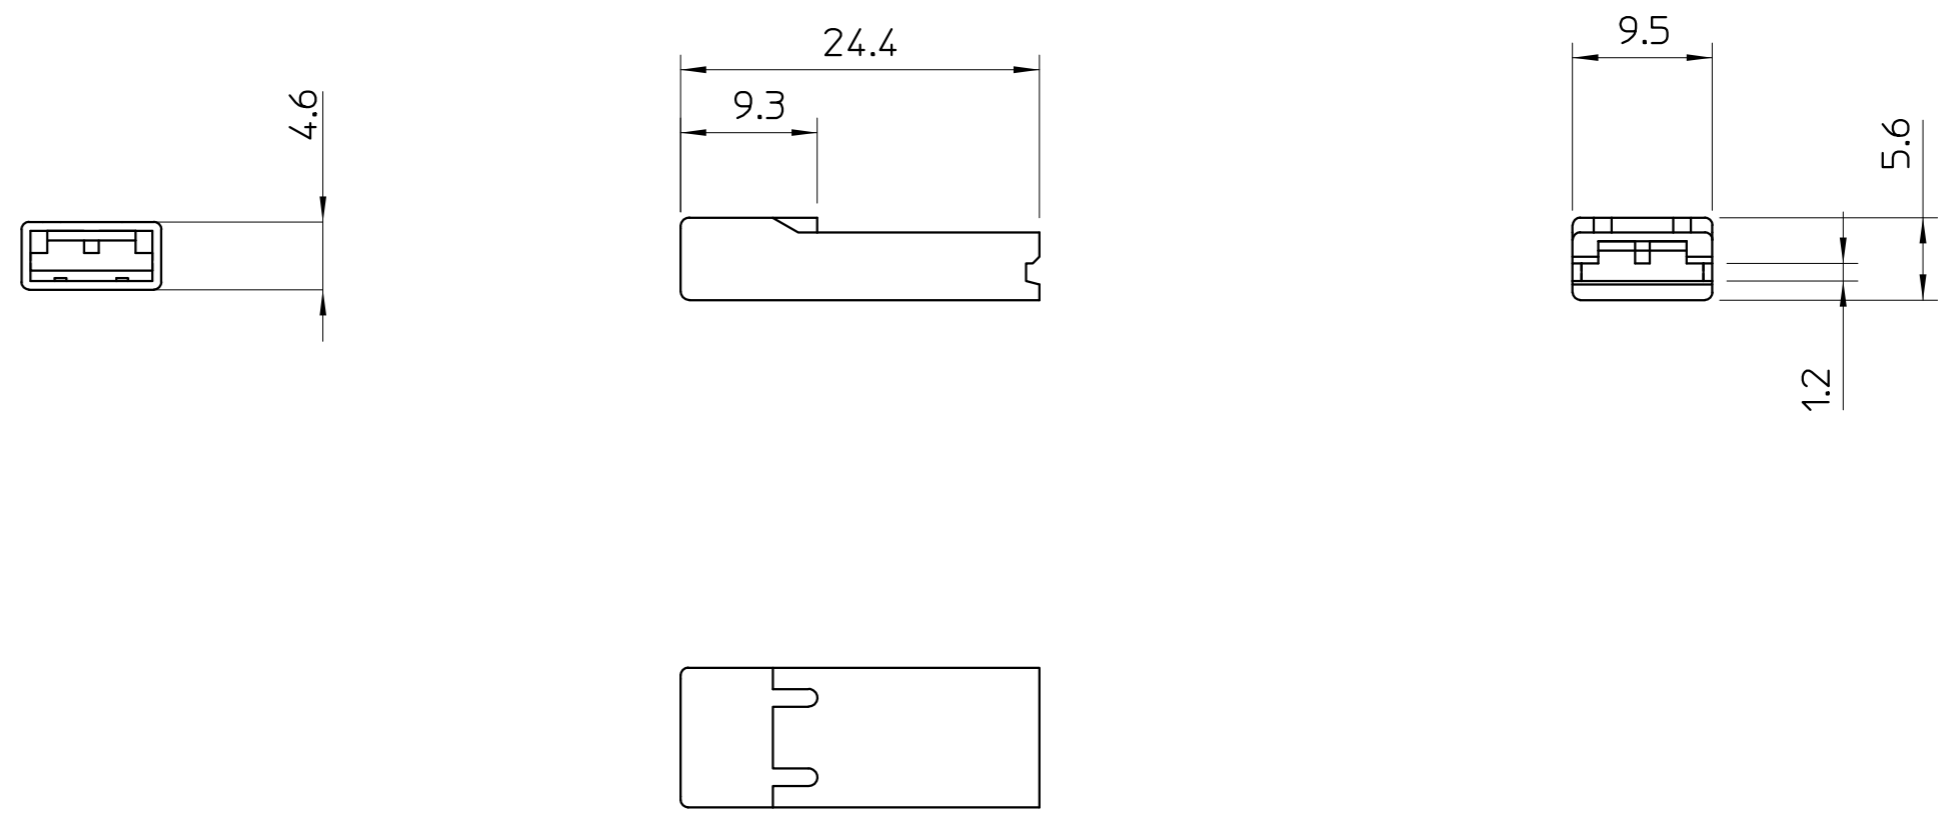

NOTES:

- 1. INSULATOR DESIGNED TO BE USED WITH THE FOLLOWING 6.3 QC RECEPTACLES:
 1627056 (UTILUX H1971 SERIES)
 1627057 (UTILUX H1972 SERIES)
 1627058 (UTILUX H1973 SERIES)
 1627059 (UTILUX H1974 SERIES)
 1627194 (UTILUX H953 SERIES)

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES AND AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE OTHER THAN TYCO ELECTRONICS PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA, USA.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: WR 24NOV05	INSULATOR H2803		1-1627123-1
ALL DIMENSIONS IN mm:		CHK: HT 24NOV05	MATERIAL DESC. NYLON 66 NATURAL		PART No.
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD:	DESCRIPTION INSULATOR, POST FIT		
DIMENSION (mm) TOLERANCE(+/-mm)		PRODUCT SPEC:	NAME: Tyco Electronics Corporation AUSTRALIA		
LESS THAN 10 0.4		APPLICATION SPEC:	SIZE A3		RESTRICTED TO -
OVER 10 TO 30 0.5		PART MASS: 0.50g	CAGE CODE		
OVER 30 TO 80 0.7		DRAWING NO. 1627123		SCALE 2:1	
OVER 80 TO 250 1.0		CUSTOMER DRAWING		SHEET 1 OF 1	
ANGLES ±2°		REV 0			
MATERIAL REF BLOCK		FINISH -			