

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

APR 2003, -

© COPYRIGHT 2003 BY TYCO ELECTRONICS CORPORATION.


ALL RIGHTS RESERVED.

LOC
JDIST
/

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REVISED(FJB0-1094-04)	26OCT04	S.C	H.K

-1: AS SHOWN

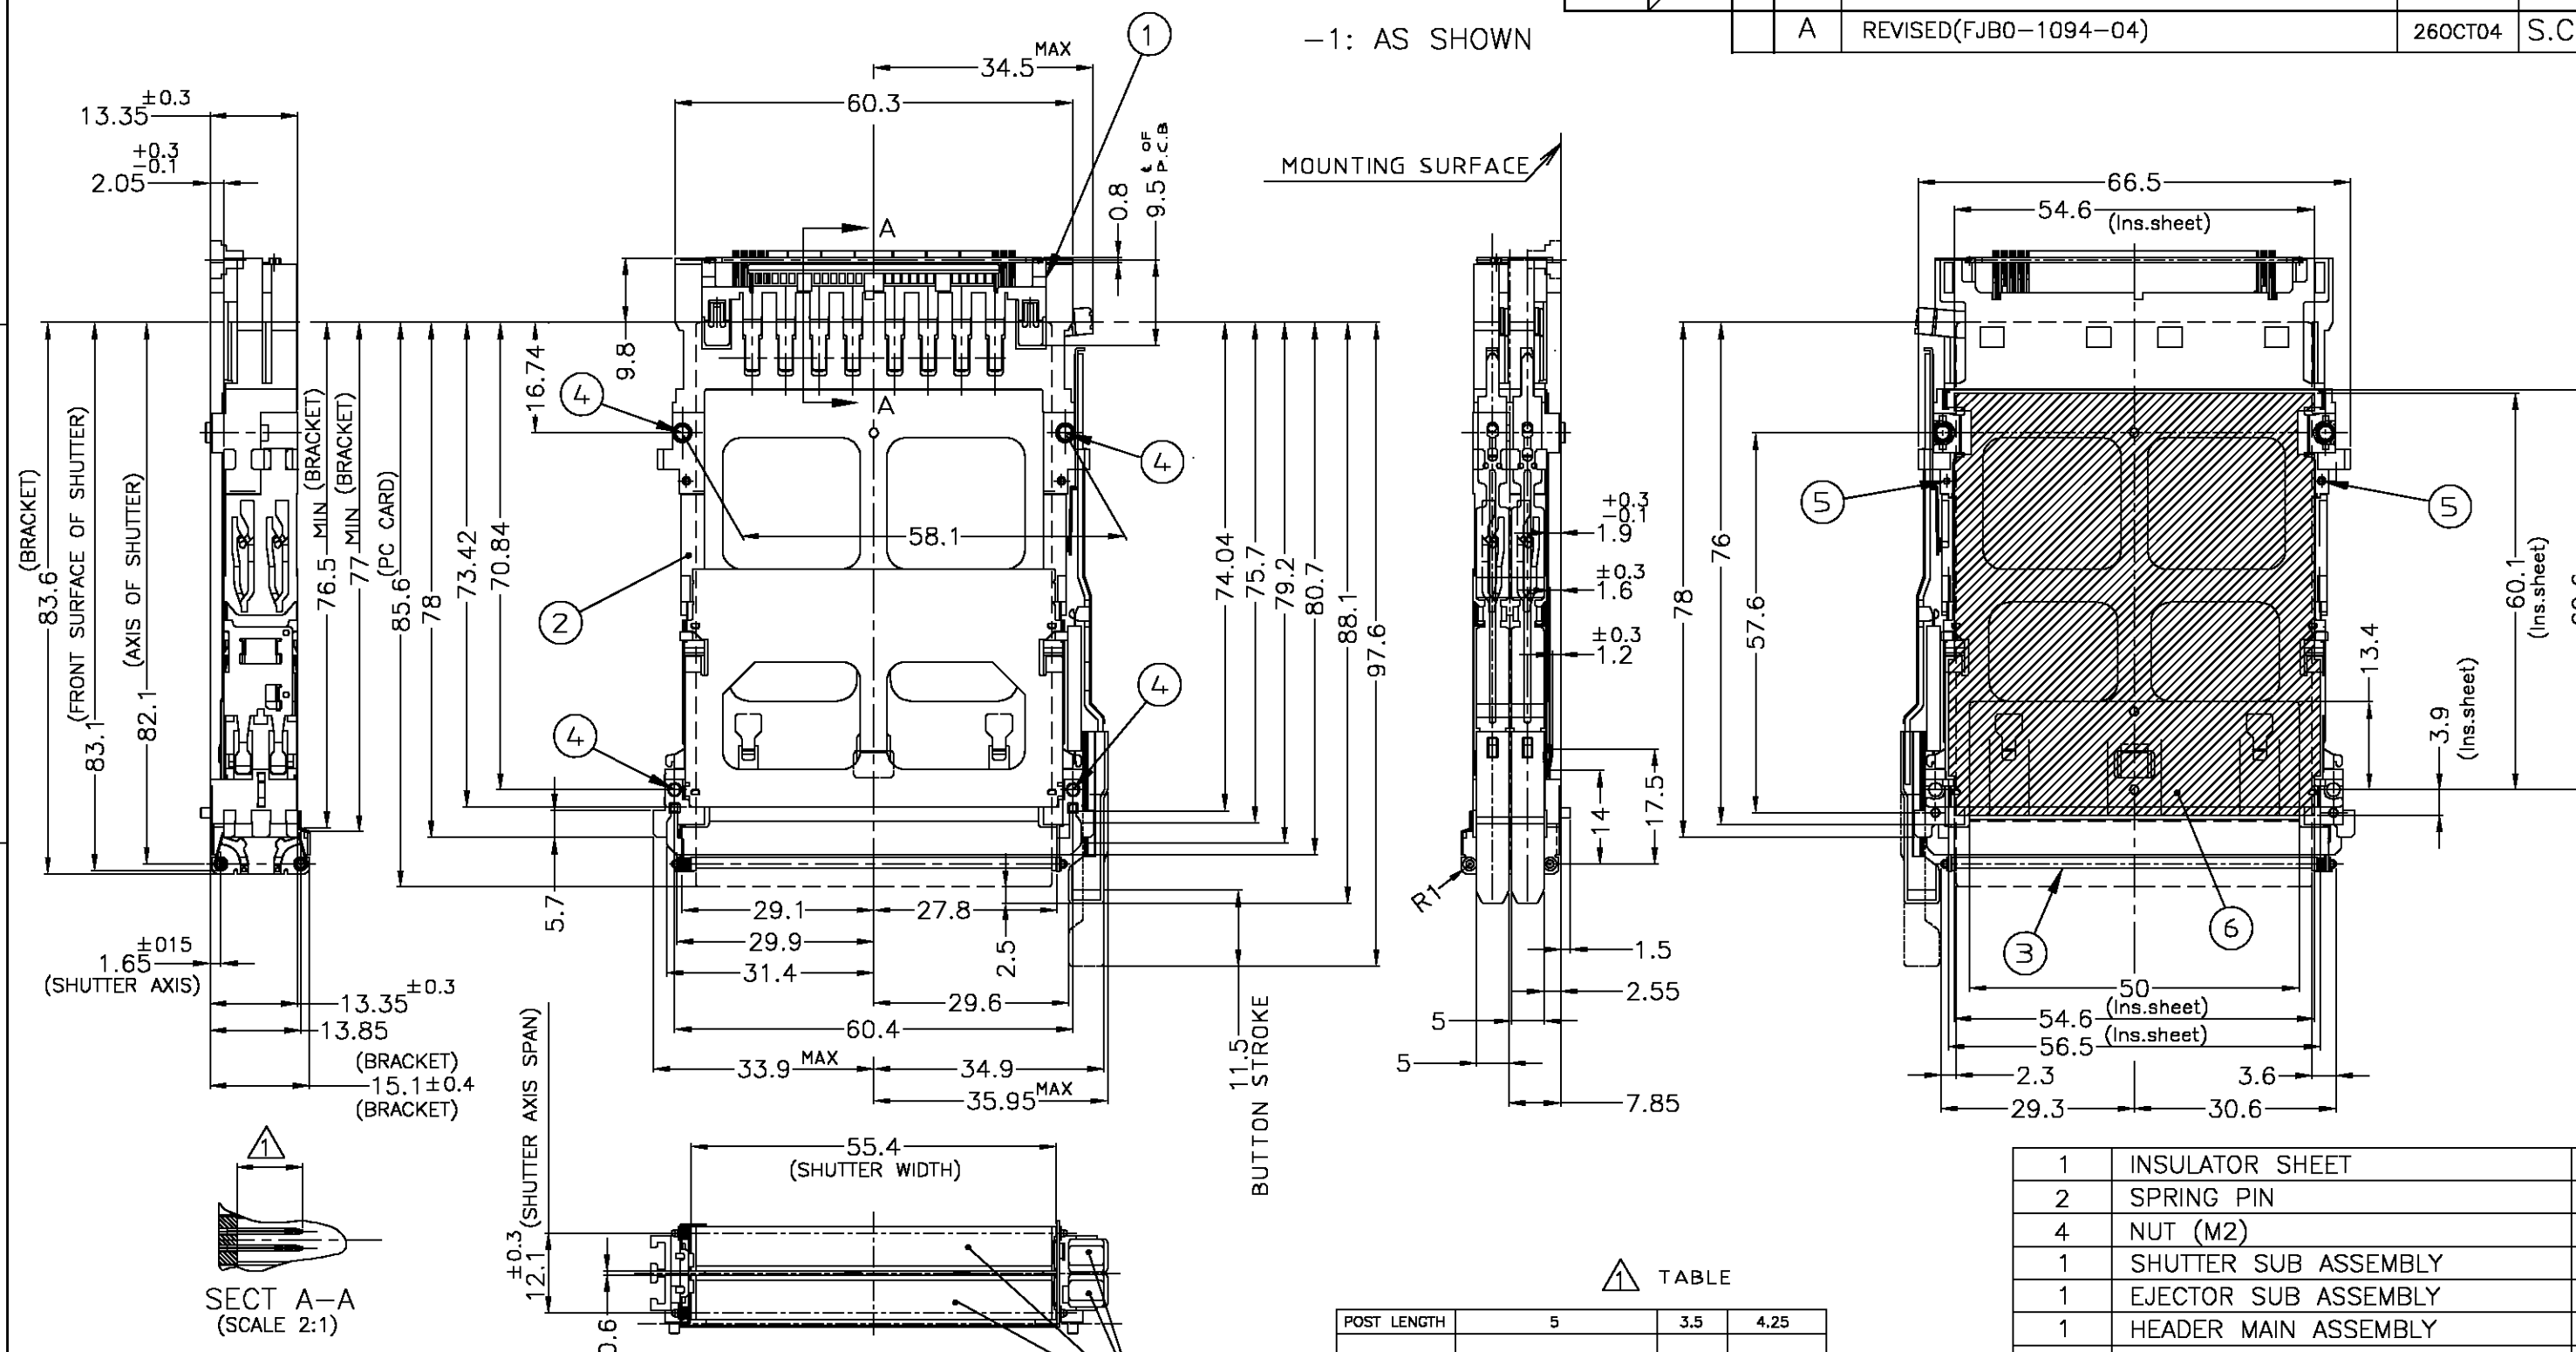

SECT A-A
(SCALE 2:1)

注記



ポスト長は表1を参照の事。



推奨ねじ締め付けトルク: 0.15N・m(1.5kg・cm) から 0.2N・m(2kg・cm)



適用PCカード: PCMCIA準拠のPCカード

ダブルスロットの使用取り付けネジはM2, P=0.4である。(4箇所)
(メートル並目ネジ, L=12を推奨)

NOTE



REFER TO TABLE 1 FOR POST CONTACT LENGTH.



RECOMMENDED TIGHTENING TORQUE

: FROM 0.15N・m(1.5kg・cm) TO 0.2N・m(2kg・cm)



APPLIED CARD: PCMCIA ATTRIBUTE PC CARD.

DOUBLE SLOT INSTALLED SCREW (M2, P=0.4) (4PLACES)
(METRIC COARSE SCREW THREADS, APPLICABLE M2 X L12)

COLOR: RUBBER GRAY

TABLE

POST LENGTH	5	3.5	4.25
CIRCUIT NO.	1,17,34,35,51,68	36,67	OTHERS

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ± 0.5
	1 PLC ± 0.5
	2 PLC ± 0.5
	3 PLC ± 0.5
	4 PLC ± 0.5
	ANGLES ± -
	FINISH
MATERIAL	

DWN	E.LIU	25FEB03
CHK	S.WATANABE	25FEB03
APVD	H.MURAMATSU	16APR03
PRODUCT SPEC	108-5590	
APPLICATION SPEC		
WEIGHT	35gr	
CUSTOMER DRAWING		

Tyco Electronics AMP K.K.		Kawasaki, Japan	
NAME			
CARD BUS CONNECTOR			
DOUBLE SLOT TOP MOUNT PUSH-PUSH TYPE			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1674869	
SCALE	1:1	SHEET	1 OF 2
REV	A		

