



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
GE	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A		RELEASED PER ECO-13-009520	07JUN2013	DD	RB

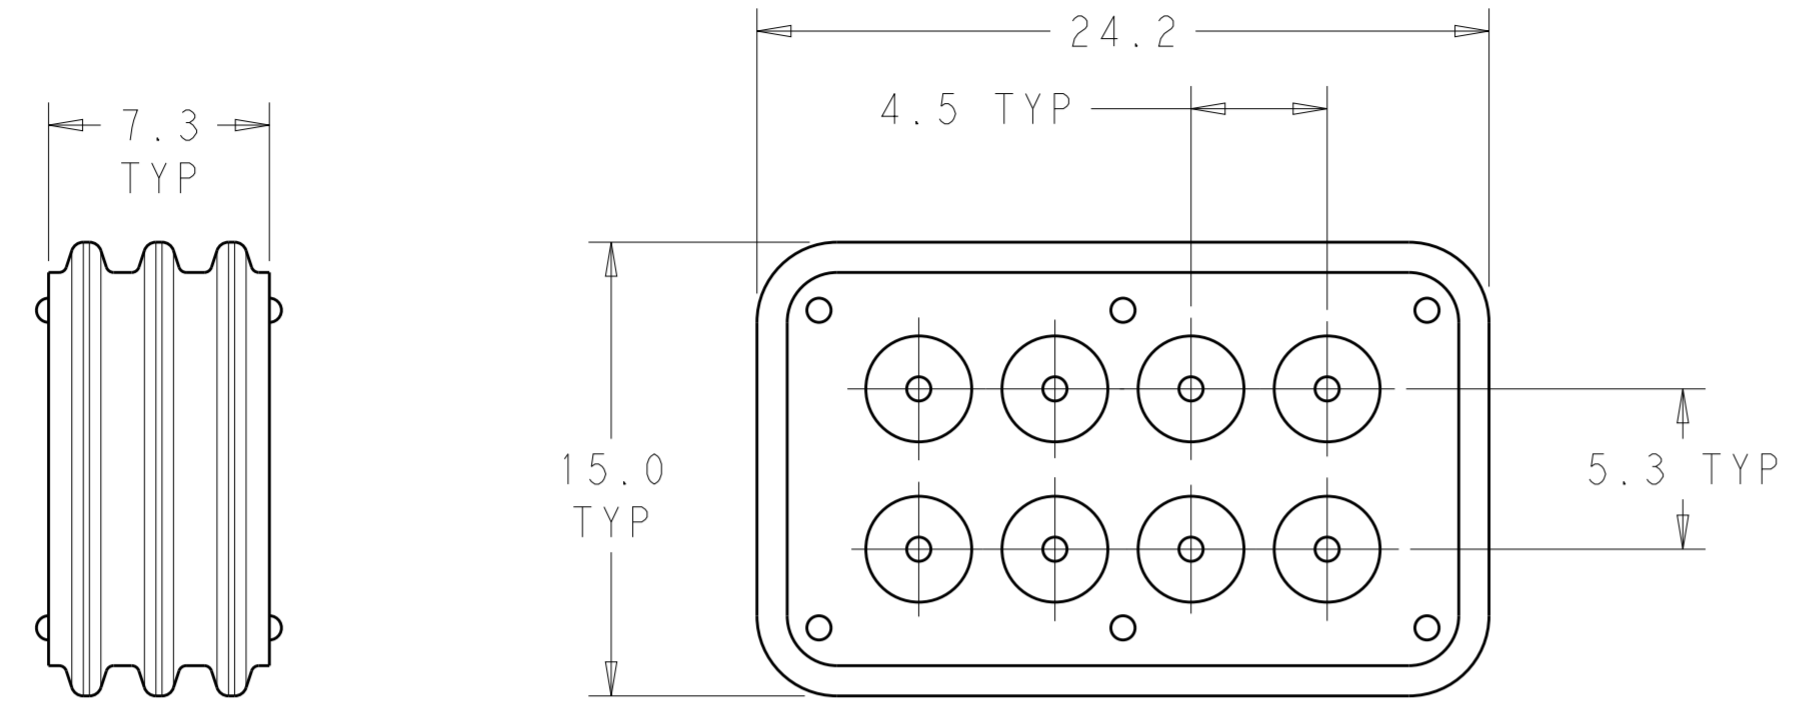


2203729-3


1. MATERIAL: SILICONE RUBBER, COLOR: SEE TABLE
2. FOR USE WITH WIRE INSULATION O.D. RANGE OF 1.30mm TO 2.54mm.

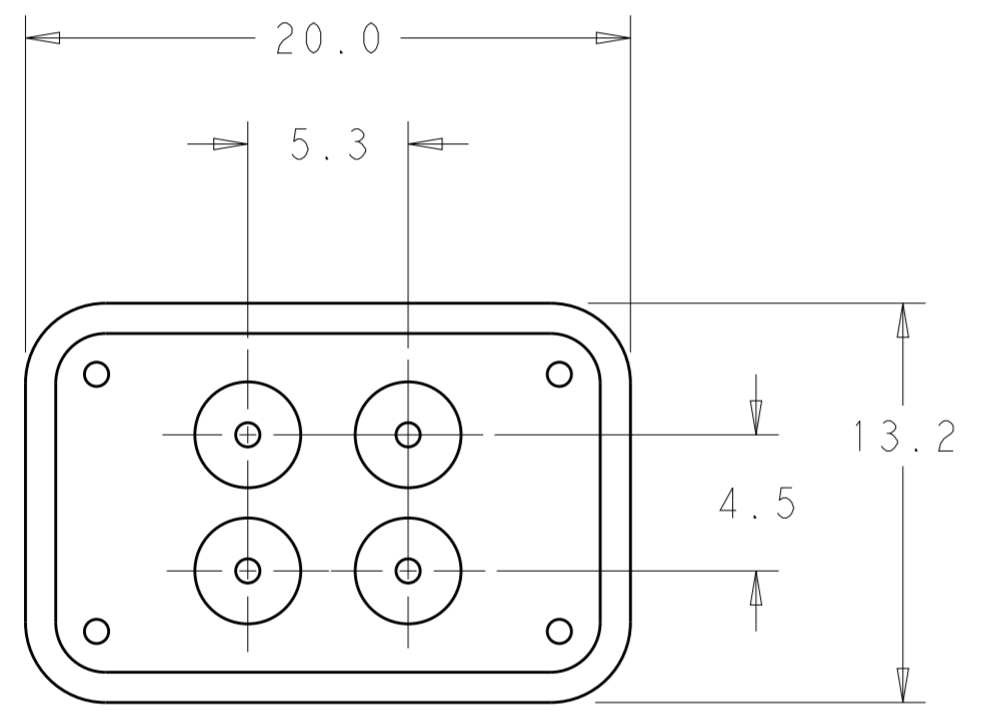

2203729-1

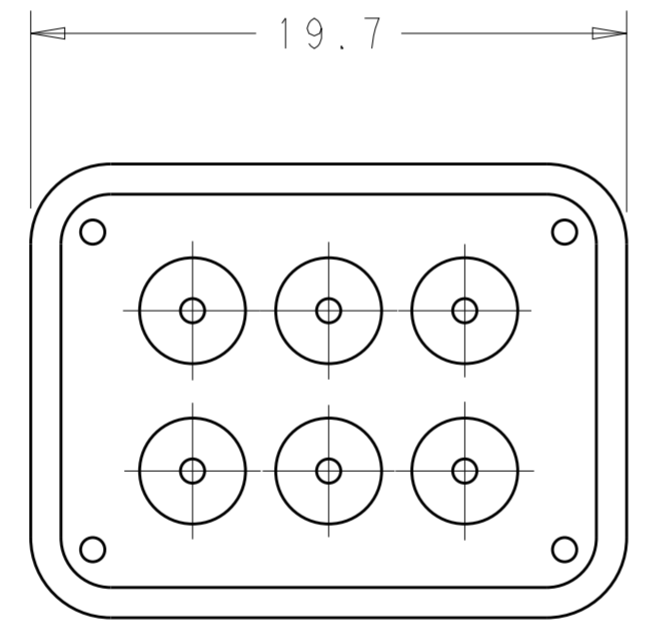

2203729-2

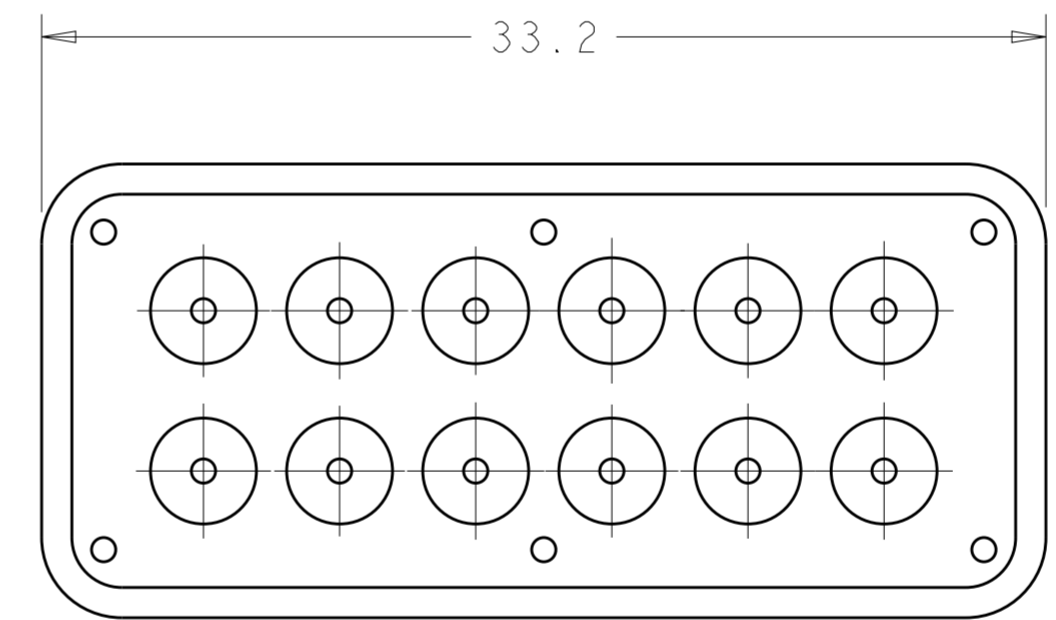

2203729-4

776539-1, -2, -3, -4	776533-1, -2, -3, -4	30	RUST	12 POSN	2203729-4
776538-1, -2, -3, -4	776532-1, -2, -3, -4	30	RUST	8 POSN	2203729-3
776537-1, -2, -3	776531-1, -2, -3	30	LIGHT GRAY	6 POSN	2203729-2
776536-1, -2, -3, -4	776524-1, -2, -3, -4	30	RUST	4 POSN	2203729-1
WHERE USED		DUROMETER	COLOR/CODE	DESCRIPTION	PART NUMBER
CAP ASSEMBLY	PLUG ASSEMBLY				

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. VESTAL 30APR2013	TE Connectivity	
		CHK R. BALTER 30APR2013		
		APVD R. BALTER 30APR2013		
		NAME		
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC 108-2184	WIRE SEAL, DUAL ROW, REDUCED DIAMETER, AMPSEAL 16	
	0 PLC ± 1 PLC ±0.2 2 PLC ± 3 PLC ± 4 PLC ±	APPLICATION SPEC 114-13065	SIZE A200779	DRAWING NO C-2203729
MATERIAL SEE NOTE	FINISH SEE NOTE	WEIGHT -	RESTRICTED TO -	
		Customer Drawing	SCALE 4:1	SHEET 1 OF 1