© 2023 TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A2	REVISED PER ECN-24-247111	05FEB2024	RK	CAS

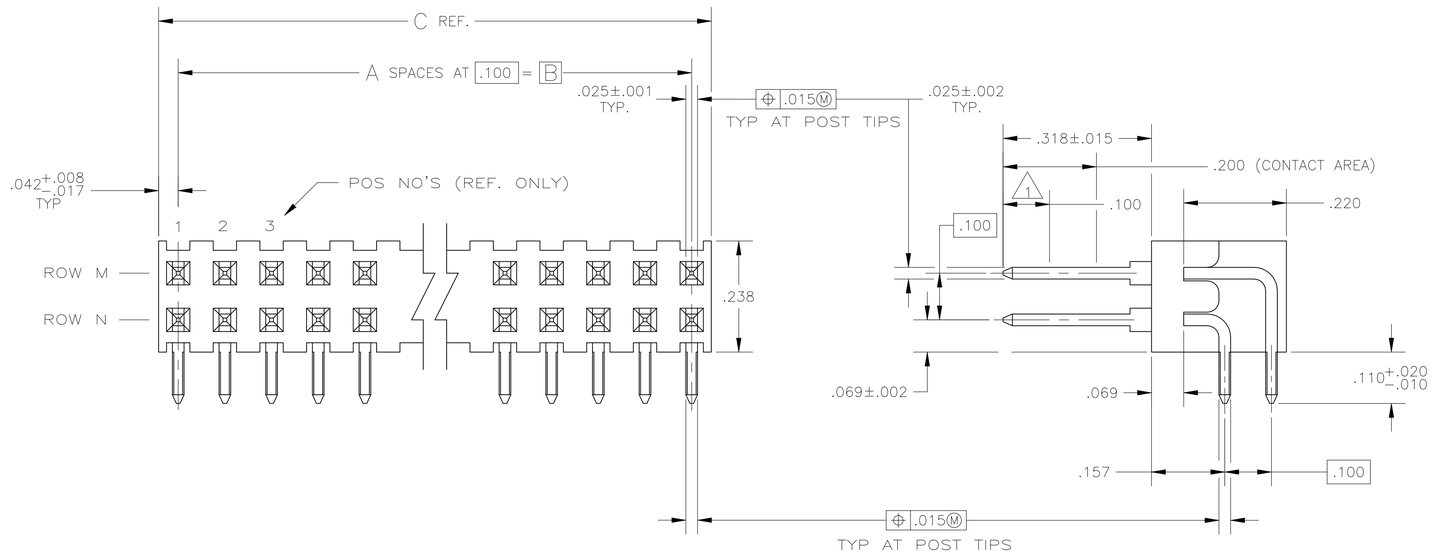

1. POINT OF MEASUREMENT FOR PLATING THICKNESS.
2. .000015 GOLD ON CONTACT AREA, MATTE TIN ON SOLDER AREA, ALL OVER .000050 NICKEL.
3. .000003 GOLD OVER .000012 Pd/Ni ON THE CONTACT AREA, MATTE TIN ON SOLDER AREA, ALL OVER .000050 NICKEL.
4. PRELIMINARY PART NUMBER NOT RELEASED FOR PRODUCTION.
5. HOUSING: FLAME RETARDANT THERMOPLASTIC
   COLOR: BLACK
   POSTS: PHOS BRONZE
6. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

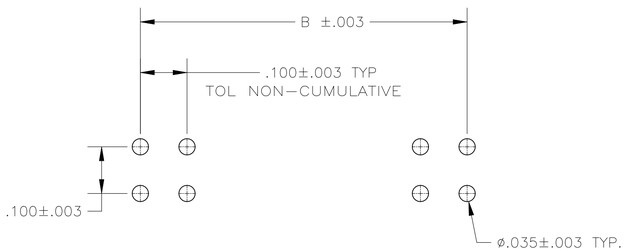

RECOMMENDED HOLE LAYOUT

6 OBSOLETE	2	NONE		3.984	3.900	39	80	80	4-2267068-0
4	2			3.884	3.800	38	78	78	3-2267068-9
4	2			3.784	3.700	37	76	76	3-2267068-8
4	2			3.684	3.600	36	74	74	3-2267068-7
4	2			3.584	3.500	35	72	72	3-2267068-6
OBSOLETE	2			3.484	3.400	34	70	70	3-2267068-5
4	2			3.384	3.300	33	68	68	3-2267068-4
4	2			3.284	3.200	32	66	66	3-2267068-3
4	2			3.184	3.100	31	64	64	3-2267068-2
4	2			3.084	3.000	30	62	62	3-2267068-1
4	2			2.984	2.900	29	60	60	3-2267068-0
4	2			2.884	2.800	28	58	58	2-2267068-9
4	2			2.784	2.700	27	56	56	2-2267068-8
4	2			2.684	2.600	26	54	54	2-2267068-7
4	2			2.584	2.500	25	52	52	2-2267068-6
OBSOLETE	2			2.484	2.400	24	50	50	2-2267068-5
4	2			2.384	2.300	23	48	48	2-2267068-4
4	2			2.284	2.200	22	46	46	2-2267068-3
4	2			2.184	2.100	21	44	44	2-2267068-2
4	2			2.084	2.000	20	42	42	2-2267068-1
OBSOLETE	2			1.984	1.900	19	40	40	2-2267068-0
4	2			1.884	1.800	18	38	38	1-2267068-9
4	2			1.784	1.700	17	36	36	1-2267068-8
OBSOLETE	2			1.684	1.600	16	34	34	1-2267068-7
OBSOLETE	2			1.584	1.500	15	32	32	1-2267068-6
OBSOLETE	2			1.484	1.400	14	30	30	1-2267068-5
4	2			1.384	1.300	13	28	28	1-2267068-4
OBSOLETE	2			1.284	1.200	12	26	26	1-2267068-3
OBSOLETE	2			1.184	1.100	11	24	24	1-2267068-2
OBSOLETE	2			1.084	1.000	10	22	22	1-2267068-1
OBSOLETE	2			.984	.900	9	20	20	1-2267068-0
OBSOLETE	2			.884	.800	8	18	18	2267068-9
OBSOLETE	2			.784	.700	7	16	16	2267068-8
OBSOLETE	2			.684	.600	6	14	14	2267068-7
OBSOLETE	2			.584	.500	5	12	12	2267068-6
OBSOLETE	2			.484	.400	4	10	10	2267068-5
OBSOLETE	2			.384	.300	3	8	8	2267068-4
OBSOLETE	2			.284	.200	2	6	6	2267068-3
OBSOLETE	2			.184	.100	1	4	4	2267068-2
OBSOLETE	2	NONE	NONE	.084	—		2	2	2267068-1
	FINISH	ROW N	ROW M	C	B	A	NO OF ACT POS	NO OF POS	ASSEMBLY PART NUMBER

POSTS OMITTED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± .005
4 PLC ± –
ANGLES ± –

MATERIAL 5

FINISH 2

DWN 04FEB2014 NAGALAKSHMI K
CHK 04FEB2014 MILLER MICHAEL
APVD 04FEB2014 MILLER MICHAEL

PRODUCT SPEC —

APPLICATION SPEC —

WEIGHT —

CUSTOMER DRAWING

TE Connectivity Ltd.

NAME: ASSEMBLY, MOD II, HEADER, DOUBLE ROW, .1 x .1 CL RIGHT ANGLE, .025 SQ POSTS,

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-2267068	—

SCALE 4:1 | SHEET 1 OF 2 | REV A2

4805 (1/15)

© – TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	–	–

OBSOLETE	3	NONE		3.984	3.900	39	80	80	9–2267068–0
4	3			3.884	3.800	38	78	78	8–2267068–9
4	3			3.784	3.700	37	76	76	8–2267068–8
4	3			3.684	3.600	36	74	74	8–2267068–7
4	3			3.584	3.500	35	72	72	8–2267068–6
OBSOLETE	3			3.484	3.400	34	70	70	8–2267068–5
4	3			3.384	3.300	33	68	68	8–2267068–4
4	3			3.284	3.200	32	66	66	8–2267068–3
4	3			3.184	3.100	31	64	64	8–2267068–2
4	3			3.084	3.000	30	62	62	8–2267068–1
4	3			2.984	2.900	29	60	60	8–2267068–0
4	3			2.884	2.800	28	58	58	7–2267068–9
4	3			2.784	2.700	27	56	56	7–2267068–8
4	3			2.684	2.600	26	54	54	7–2267068–7
4	3			2.584	2.500	25	52	52	7–2267068–6
OBSOLETE	3			2.484	2.400	24	50	50	7–2267068–5
4	3			2.384	2.300	23	48	48	7–2267068–4
4	3			2.284	2.200	22	46	46	7–2267068–3
4	3			2.184	2.100	21	44	44	7–2267068–2
4	3			2.084	2.000	20	42	42	7–2267068–1
OBSOLETE	3			1.984	1.900	19	40	40	7–2267068–0
4	3			1.884	1.800	18	38	38	6–2267068–9
4	3			1.784	1.700	17	36	36	6–2267068–8
OBSOLETE	3			1.684	1.600	16	34	34	6–2267068–7
OBSOLETE	3			1.584	1.500	15	32	32	6–2267068–6
OBSOLETE	3			1.484	1.400	14	30	30	6–2267068–5
4	3			1.384	1.300	13	28	28	6–2267068–4
OBSOLETE	3			1.284	1.200	12	26	26	6–2267068–3
OBSOLETE	3			1.184	1.100	11	24	24	6–2267068–2
OBSOLETE	3			1.084	1.000	10	22	22	6–2267068–1
OBSOLETE	3			.984	.900	9	20	20	6–2267068–0
OBSOLETE	3			.884	.800	8	18	18	5–2267068–9
OBSOLETE	3			.784	.700	7	16	16	5–2267068–8
OBSOLETE	3			.684	.600	6	14	14	5–2267068–7
OBSOLETE	3			.584	.500	5	12	12	5–2267068–6
OBSOLETE	3			.484	.400	4	10	10	5–2267068–5
OBSOLETE	3			.384	.300	3	8	8	5–2267068–4
OBSOLETE	3			.284	.200	2	6	6	5–2267068–3
OBSOLETE	3			.184	.100	1	4	4	5–2267068–2
OBSOLETE	3	NONE	NONE	.084	–		2	2	5–2267068–1
	FINISH	ROW N	ROW M	C	B	A	NO OF ACT POS	NO OF POS	ASSEMBLY PART NUMBER
		POSTS OMITTED							

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± .005
4 PLC ± –
ANGLES ± –

MATERIAL

FINISH

DWN 04FEB2014 NAGALAKSHMI K
CHK 04FEB2014 MILLER MICHAEL
APVD 04FEB2014 MILLER MICHAEL

PRODUCT SPEC —

APPLICATION SPEC —

WEIGHT —

TE Connectivity Ltd.

NAME
ASSEMBLY, MOD II, HEADER,
DOUBLE ROW, .100 x .100 CL
RIGHT ANGLE, .025 SQ POSTS, SELECTIVELY LOADED

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-2267068	—

CUSTOMER DRAWING

SCALE 4:1 SHEET 2 OF 2 REV A2

4805 (1/15)