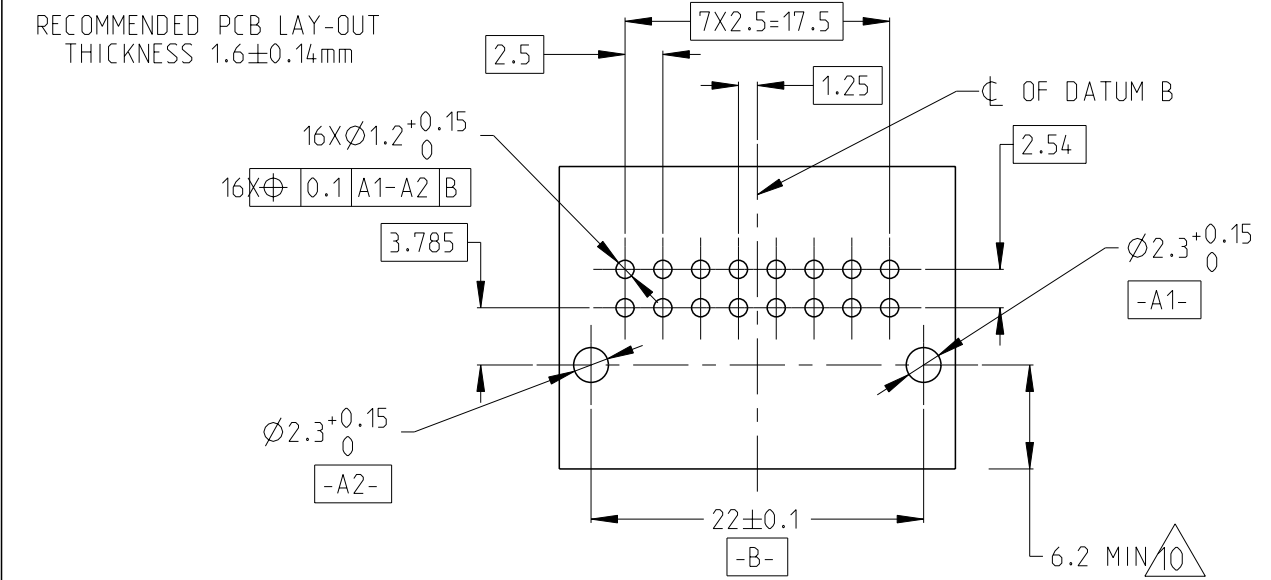

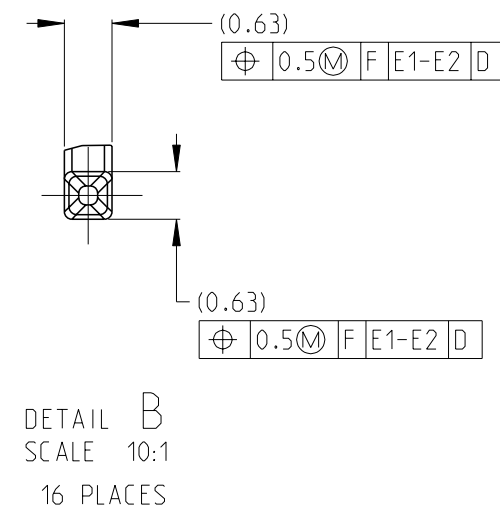
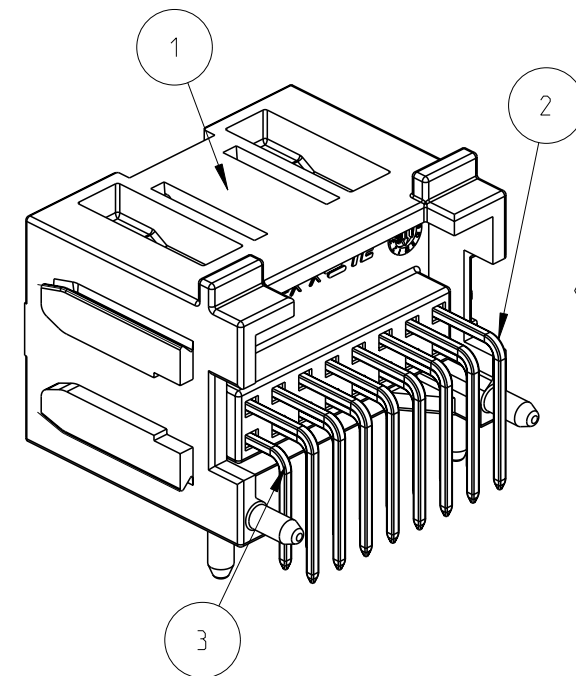
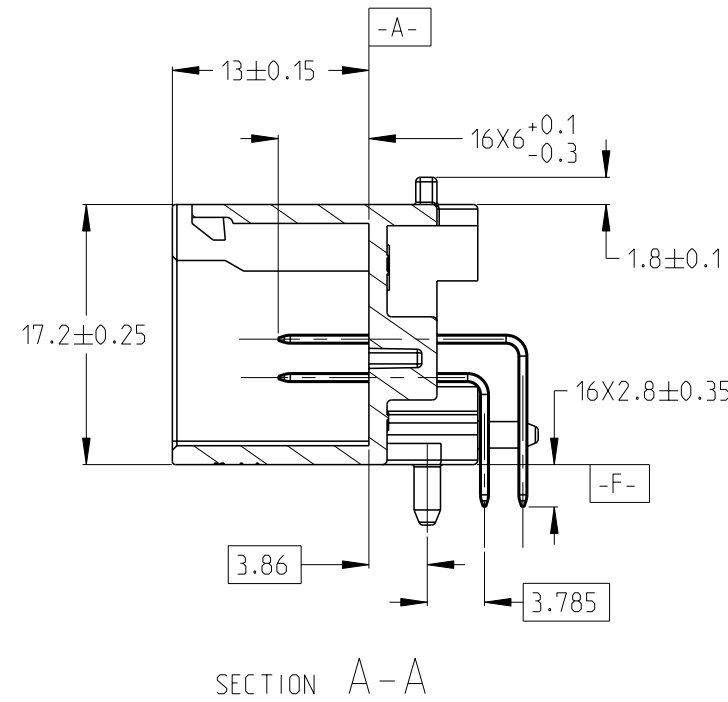


- 1 PLASTIC MATERIAL: PA10T OR SPS
SQ PIN MATERIAL: CuZn30
PLATING SPEC: TIN OVER NICKEL
- 2 MATERIAL MARKING
- 3 PLASTIC HOUSING PRODUCTION MONTH CLOCK
- 4 TOOL CAVITY MARKING 1.2.3.4...
5. PRODUCT OPERATION TEMPERATURE RANGE:-40°C~105°C
6. SUITABLE MATING CONNECTOR: 2301695
- 7 TE-LOGO
- 8 TE SEMIFINISHED PART NUMBER
- 9 TE SEMIFINISHED PART REVISION
- 10 PRODUCT STABILIZATION FOR SOLDERING PROCESS
- 11 PRODUCT ASSEMBLY DATA INFORMATION
- 12 FOR P/N: 2311622-6, FINISHED P/N IS MARKED WITH 2311622-1.

PART LIST

NAME 16 WAY MQS PIN HEADER

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	-	G-2311622	
		SCALE 3:1	SHEET 1 OF 1 REV B6

The image contains two technical drawings of 16-pin connectors. The left drawing is labeled 'CODING A-D' and the right drawing is labeled 'CODING B-C'. Both drawings show a top-down view of the connector with dimensions and labels.

CODING A-D: This drawing shows a connector with a central row of 16 pins. The pins are numbered 1 through 16. The connector has a rectangular body with a central slot. Dimensions are indicated: (19.6) for the total width, (9.8) for the width of the central slot, and (8) for the width of the side sections. Labels include 'CODING D' pointing to the top left corner, 'CODING A' pointing to the top right corner, and 'CODING B-C' pointing to the bottom right corner.

CODING B-C: This drawing shows a connector with a central row of 16 pins. The pins are numbered 1 through 16. The connector has a rectangular body with a central slot. Dimensions are indicated: (19) for the total width, (16) for the width of the central slot, (8) for the width of the side sections, and (9.5) for the width of the central slot. Labels include 'CODING C' pointing to the top left corner, 'CODING B' pointing to the top right corner, and 'CODING A-D' pointing to the bottom right corner.

Diagram of a 16-pin DIP package. The package is shown from a top-down perspective. The pins are arranged in two rows of eight. The top row of pins is labeled 'XX-XX-XX-X' and the bottom row is labeled 'XX-XX-XX-X'. The pin on the left side of the top row is labeled 'VO'. The package has a central rectangular area with a small 'X' in the center. The package is shown with a top view and a side view.

SCALE 2:1
ISOMETRIC VIEW

THIS DRAWING IS A CONTROLLED DOCUMENT

DWN	14 DEC 2016
-----	-------------

CHK	04 JAN 2017
-----	-------------

APVD	23JAN2017
------	-----------

PRODUCT SPEC

108-101528

114-101065

WEIGHT	-
--------	---

CUSTOMER DRAWING

SCALE	3.1
-------	-----

3.1

1 OF

REV B6

DIMENS

1

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

1	PLC	± 0.1
2	PLC	± 0.01
3	PLC	± 0.001
4	PLC	± 0.0001

ANODES	1
FINISH	—

—

PRODUCT SPEC

108-101528

114-101065

WEIGHT	-
--------	---

CUSTOMER DRAWING

SCALE	3.1
-------	-----

3.1

1 OF

REV B6