THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT – TE Connectivity Ltd. ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL REL. PER LC20-0051-20	06MAY2020	DM	BJ
	A1	LC20-0059-20 / ECO-20-006903	15MAY2020	DM	BJ

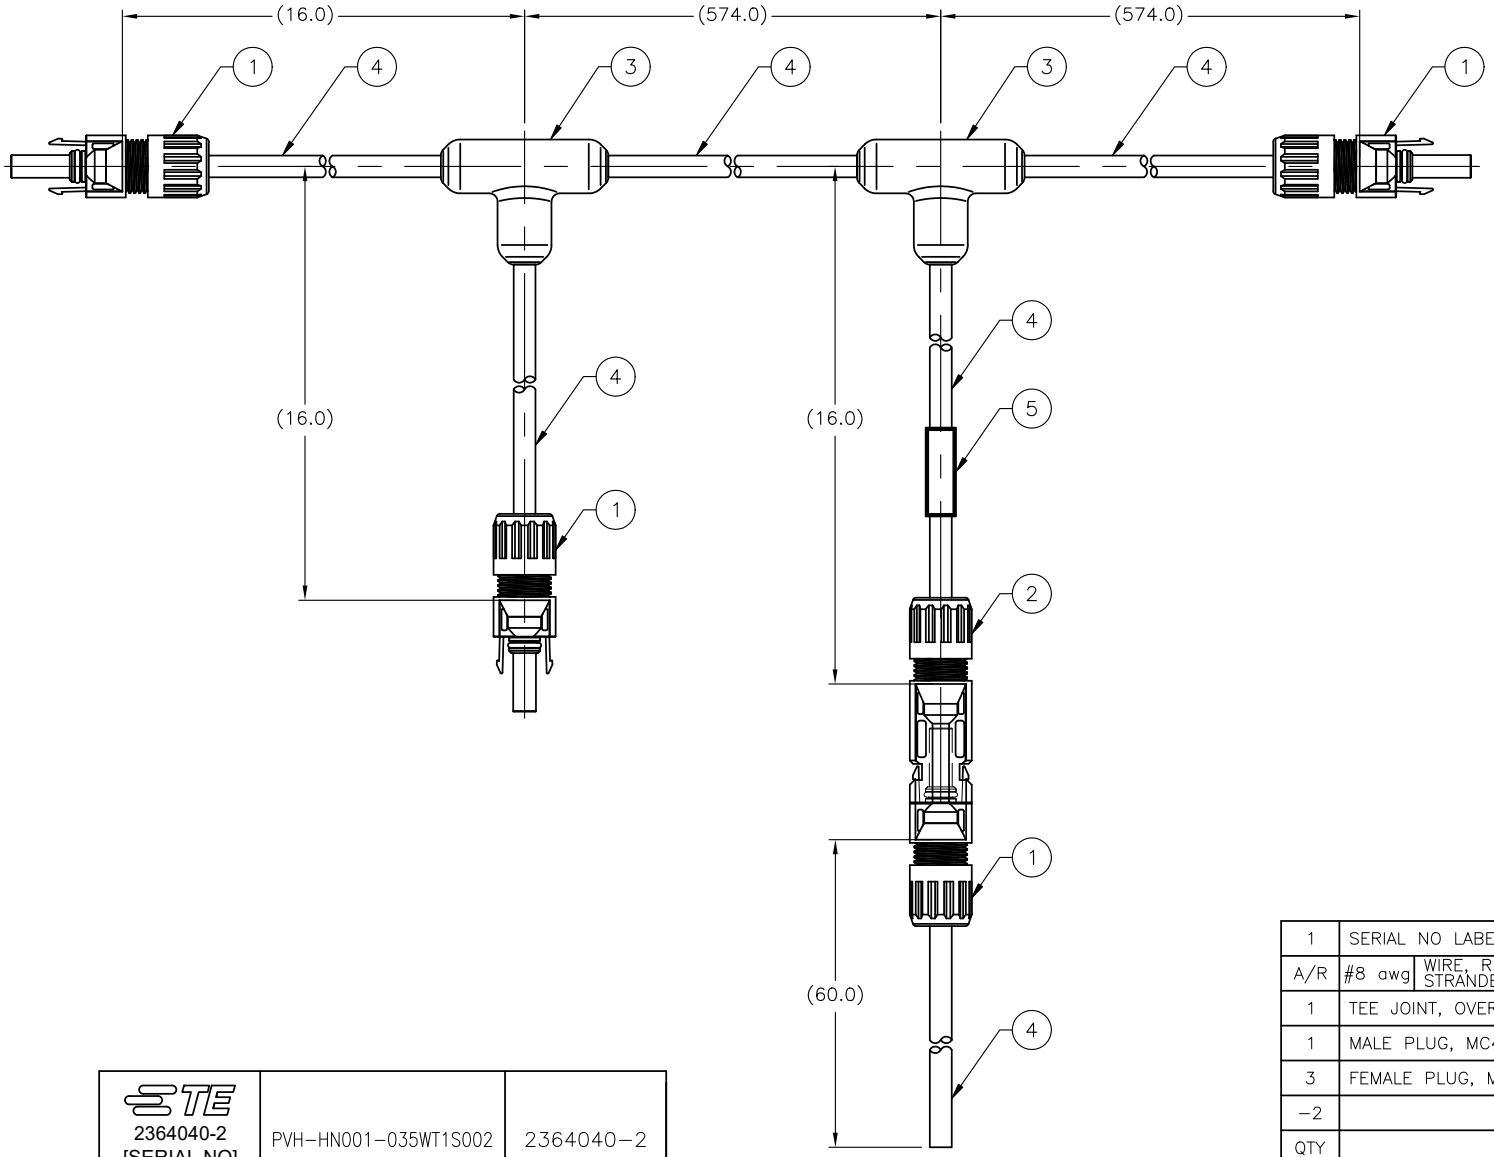

1. WIRE HARNESS SHALL BE BUILT TO UL STANDARD AND SHALL BE LISTED TO UL STANDARD 9703.
2. HARNESS SHALL CONFIRM TO UL 4703 PV RATING. THIS HARNESS RATED FOR OPERATION AT 2 kV DC. UV RESISTANT AND DIRECT BURIAL RATED AS REQUIRED.
3. CONNECTORS PREFABRICATED MARKINGS ARE NOT INDICATIVE OF THE (POSITIVE OR NEGATIVE) TYPE OF HARNESS ASSY.

△4 PRODUCT LABEL MARKING:
LABEL TEXT INK STAMPED ON LABEL TO READ AS BELOW. SEE TABLE FOR VALUES.

[TE LOGO]
[TE PART NO]
[SERIAL NO]
[DATE CODE]

ITEM NO	DESCRIPTION	QTY
5	SERIAL NO LABEL, UL LISTED, ADHESIVE	1
4	WIRE, RHW-2 COPPER STRANDED, 2 kV RATED, WHITE	A/R #8 awg
3	TEE JOINT, OVERMOLDED, XLPE/PVC	1
2	MALE PLUG, MC4	1
1	FEMALE PLUG, MC4	3

PARTS LIST

2364040-2 [SERIAL NO] [DATE CODE]	PVH-HN001-035WT1S002	2364040-2
LABEL MARKING △4	DESCRIPTION	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL: SEE BOM
FINISH: –

DWN D. MURUGIAH 06MAY2020
CHK S. RAHMAN 06MAY2020
APVD B. JOHNSON 06MAY2020
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT 0

TE Connectivity

NAME: PHOTO-VOLTAIC DC HARNESS, NEGATIVE, 3 STRING, 8 AWG, 1500 V, 15 A
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-2364040-2	–

CUSTOMER DRAWING | SCALE NTS | SHEET 1 OF 1 | REV A1

2364040-2

1471-9 (1/15)