SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REGUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

UL RECOGNIZED: UL 1283 CSA CERTIFIED: CSA 22.2, No. 8 VDE APPROVED: EN 60939-2

OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 3 AMP, 120/250 VAC, 3 AMP/40°C, 250 VAC

LINE FREQUENCY: 50-60Hz

MAXIMUM LEAKAGE CURRENT,

0.22 mA@ 120V 60Hz EACH LINE TO GROUND: 0.38 mA@ 250V 50Hz

DPERATING AMBIENT TEMP. RANGE: -10° C TD $+40^{\circ}$ C @ RATED CURRENT, Ir. IN AN AMBIENT, T_0 , HIGHER THAN 40°C, THE MAXIMUM DPERATING CURRENT, I_0 , IS AS FOLLOWS: $I_0 = I_0$, $\sqrt{85}$ -T 085 -T α $I_0 = I_r -$

RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES In FOR 8 ZECDNDZ

CUSTOMER DRAWING CATALOG # 3EJS1 ECN # APPRVD. DATE 16JAN24 24-261887 JB

TEST SPECIFICATIONS:

INDUCTANCE: 1.45 mH NDMINAL

CAPACITANCE: (MEASURED @ 1KHz, 0.250VAC MAX., 25°C±1°C)

0.0059 μF ±20% 0.1015 μF ±20% LINE TO GROUND: LINE TO LINE: DISCHARGE RESISTOR: 1.5M ∩

L/G AND L/L I.R.

ND DISCHARGE RESISTOR: 6000M₁ (MIN.) @ 100VDC,


20°C AND 50% RH

RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 1500 VAC DR 2250 VDC FOR 1 MINUTE LINE TO LINE: 1450 VDC FOR 1 MINUTE

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

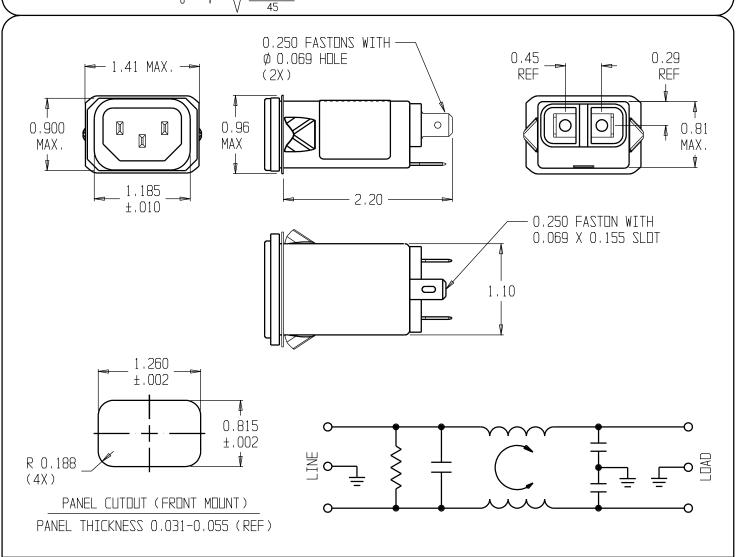

50n-50n(MINIMUM) INSERTION LOSS											THIRD ANGLE		TE		
FREQUENCY MHz	.01	.05	0.1	. 15	0.5	1	5	10	30		PROJECTION UNLESS OTHERWISE SPECIFIED,			E Connectivity	у
I'II IZ											TOLERANCE TO BE ±.025	D 0 W	יוד זו רוור וו	יור דרות זו דר דור רודו.	,
COMMON	_	10	15	20	_ ⊒U	39	48	50	60		MATERIAL & FINISH: AS SUPPLIED	POWER LINE FILTER			
d B		10	13	20	טכ	در ا	1 40] 30	00		THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES	CAD FILE:		TE PART #: 6609006-	
DIFF. dB	ı	ı	5	8	17	20	39	42	40		TYCD ELECTRONICS CORPORATION AND ITS WORLDVIDE SUBSIDIARIES AND AFFILLATES. IT MAY NOT BE DISCLOSED ID ANYONE OTHER THAN TYCO ELECTRONICS PERSONEL, VITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION. HARRISBURG, PENNSYLVANIA USA	SCALE: NTS DRW. BY: SD	DATE: 12DECO2 DRIG: PJD	CATALOG NO. 3EJS1	E REV.