## SPECIFICATION CONTROL DRAWING

5024A1811

**CHEMINAX** 

.106

50 OHM, AWG 24, 19 STRANDS OF 36 AWG, COAXIAL CABLE

Date 8-20-07
Revision E


THIS SPECIFICATION SHEET FORMS A PART OF THE LATEST ISSUE OF RAYCHEM SPECIFICATION 1200.

## **CONSTRUCTION DETAILS**

**ELECTRICAL CHARACTERISTICS** 

DIMENSIONS ARE NOMINAL VALUES IN INCHES UNLESS OTHERWISE DESIGNATED.

CHARACTERISTIC IMPEDANCE  $50 \pm 2$  ohms, Method A CAPACITANCE 25 pF/ft. (nominal) VELOCITY OF PROPAGATION 78% (nominal)

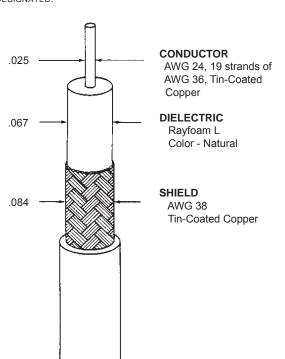

**JACKET** 

**UK Zerohal** 

## **ADDITIONAL REQUIREMENTS**

**ELECTRICAL** 

CONDUCTOR RESISTANCE 25.0 ohms/1000 ft. (nominal)
INSULATION RESISTANCE 10,000 megohms (minimum)

for 1000 ft.

JACKET FLAWS

SPARK TEST 1.0 kV (rms) IMPULSE TEST 6.0 kV (peak)

VOLTAGE WITHSTAND (DIELECTRIC) 1000 volts (rms) (minimum)

**ENVIRONMENTAL** 

FLAMMABILITY Method B HEAT SHOCK 225°C

LOW TEMPERATURE-COLD BEND -30°C/3.00 inch mandrel

VOLTAGE WITHSTAND

(Post Environmental) 1000 volts (rms), 1 minute

**PHYSICAL** 

INSULATION (DIELECTRIC)
ELONGATION
TENSILE STRENGTH

50% (minimum) 800 lbf/in² (minimum)

JACKET

## 150% (minimum)

### 150% (minimum)

### 1200 lbf/in² (minimum)

### JACKET THICKNESS

### .011 inch (nominal)

SHIELD COVERAGE 90% (minimum)

Outer jacket color will be black (designated by a "-0" appended to the part number, e.g. 5024A1811-0) unless otherwise specified.

Designate outer jacket color with a dash number in accordance with MIL-STD-681. Other codes and suffixes may be added to the part number, as necessary, to capture any additional requirements imposed by the purchase order.

WEIGHT 8.5 lbs/1000 ft. (nominal)

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. Tyco Electronics also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.

CHEMINAX, RAYFOAM, RAYCHEM and ZEROHAL are trademarks of Tyco Electronics Corporation.



Manufactured In J. H. Only