


REVISIONS		
REV	DESCRIPTION	DATE
D	REVISED PER DCR R060147	03/22/2006

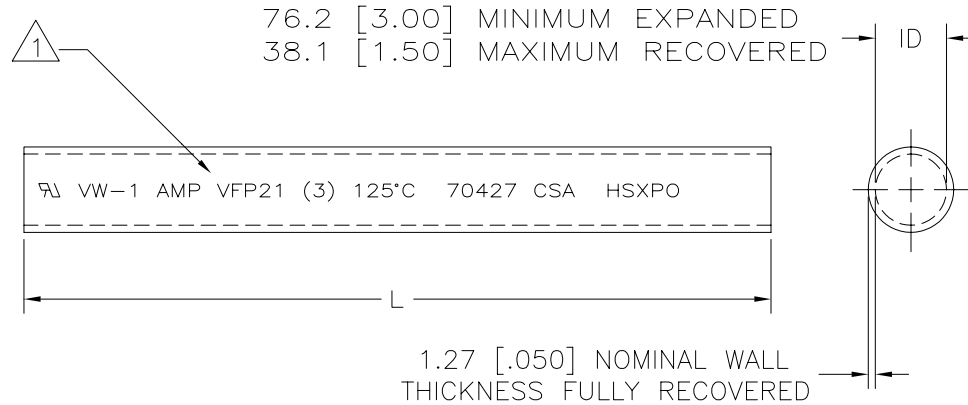

1 TUBING VFP21 MARKED AS SHOWN IN WHITE CHARACTERS ON SURFACE INDICATED

2 TUBING VFP21 IS UL RECOGNIZED, IS RATED 125°C [257°F], 600 V AND MEETS VW-1 FLAME TEST.

3 TUBING VFP21 IS CSA CERTIFIED AND MEETS VW-1 FLAME TEST.

4 TUBING FP21 IS UNMARKED AND MEETS REQUIREMENTS OF AMS-DTL-23053/5-113-0

5. WEIGHT PER LINEAR FOOT/304.8 mm: 55.3 g/.122 lbs.

6. MATERIAL: BLACK POLYOLEFIN

4	4	30.48 m [100 ft] MINIMUM	603333-6
		1219.2 ± 3.05 [48.00 ± .12]	603333-5
1	2 3	30.48 m [100 ft] MINIMUM	603333-2
		1219.2 ± 3.05 [48.00 ± .12]	603333-1
MARKING	NOTES	LENGTH L	PART NUMBER

### SPECIFICATION CONTROL DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm. INCH DIMENSIONS ARE IN BRACKETS.  DECIMALS .XX ± .01 [ .0004 in ] .X ± .1 [ .004 in ]  ANGLES .X ± 0.5 DEG	DRAWN	UNGUYEN	03/22/2006	Tyco Electronics Corporation 300 Constitution Drive Menlo Park, CA, USA 94025 	
	APPROVED	JBROOKS	03/22/2006		
	CAD NAME	R060147		TITLE	AMPSULATION VFP21 AND FP21, 3.00 INCH ID, BLACK
THIRD ANGLE PROJECTION			SIZE	CODE IDENT. NO.	DWG. NO.
			B	06090	603333
			DO NOT SCALE THIS DRAWING		SHEET 1 OF 1

If this document is printed it becomes uncontrolled. Check for the latest revision