


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
2		REVISED PER ECO-17-011927	22AUG2017	RS	KR



1. MUST BE ASSEMBLED WITH PLUG FRONT P/N 794755-1 BEFORE MATING. KIT P/N IS 794754-1.
2. UL AND CSA LOGOS LOCATED THIS SURFACE.
3. AMP LOGO LOCATED ON FAR SIDE.
4. CIRCUIT NO. 1 IDENTIFICATION BUTTON LOCATED APPROXIMATELY AS SHOWN.
5. LOCATION OF CIRCUIT NUMBERS MOVE BUT WILL REMAIN ADJACENT TO APPROPRIATE CAVITY.
6. DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED CONDITION ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.

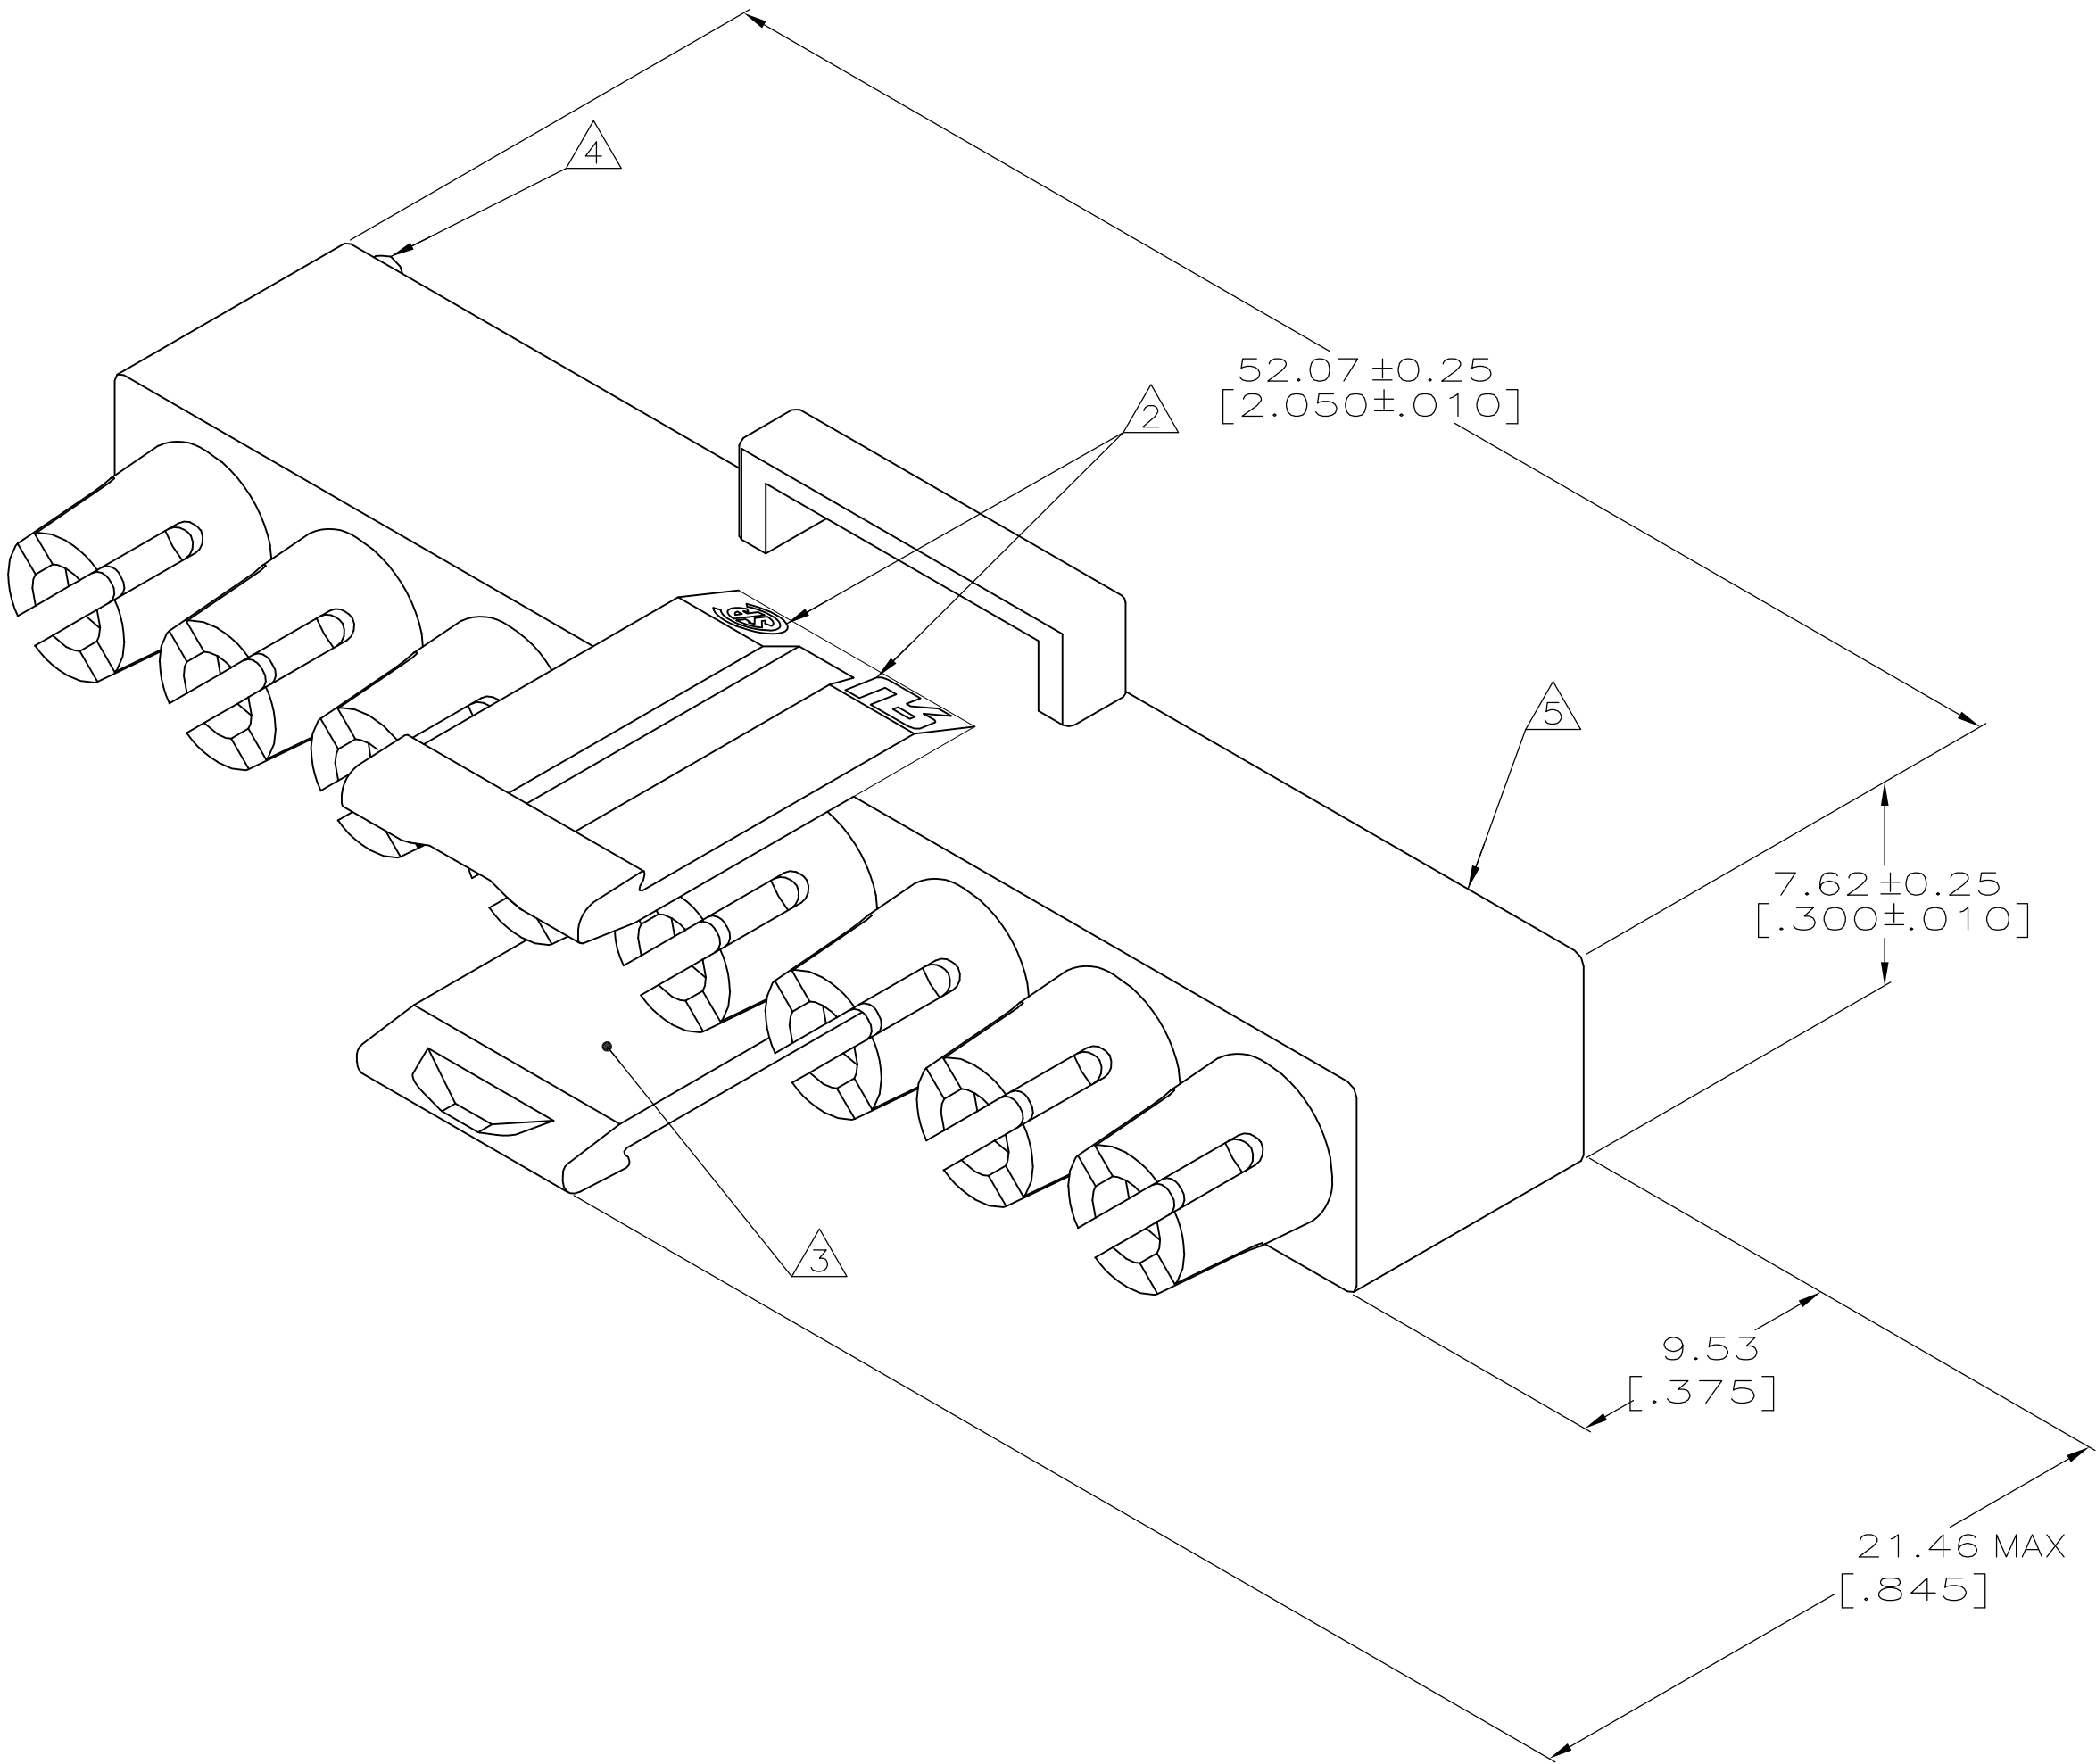

PRELIMINARY  
NOT RELEASED FOR  
PRODUCTION

METRIC

794756-1  
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 09-MAR-2000	 TE Connectivity			
		CHK K. COBLE 09-MAR-2000				
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD K. COBLE 09-MAR-2000	NAME	PLUG REAR, 8 CIRCUIT, UNIVERSAL MATE-N-LOK		
	0 PLC ± -	PRODUCT SPEC	SIZE	CAGE CODE	DRAWING NO	
	1 PLC ± -	APPLICATION SPEC				RESTRICTED TO
	2 PLC ± 0.13 [.005]	—				
	3 PLC ± -	—				
MATERIAL NYLON,		WEIGHT 0.000000	A1 00779		794756	
		CUSTOMER DRAWING	SCALE		5:1	
			SHEET		1 OF 1	
			REV		2	