
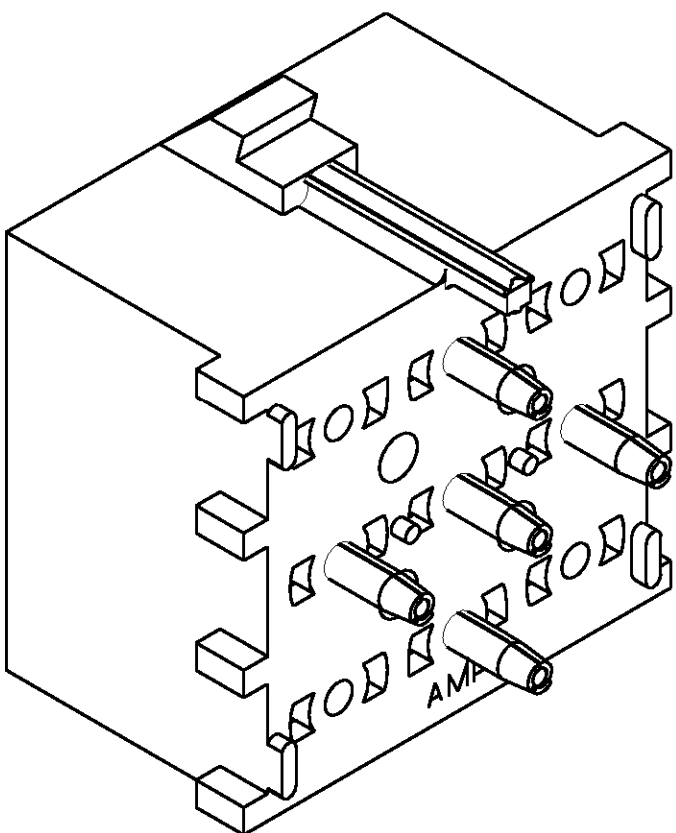
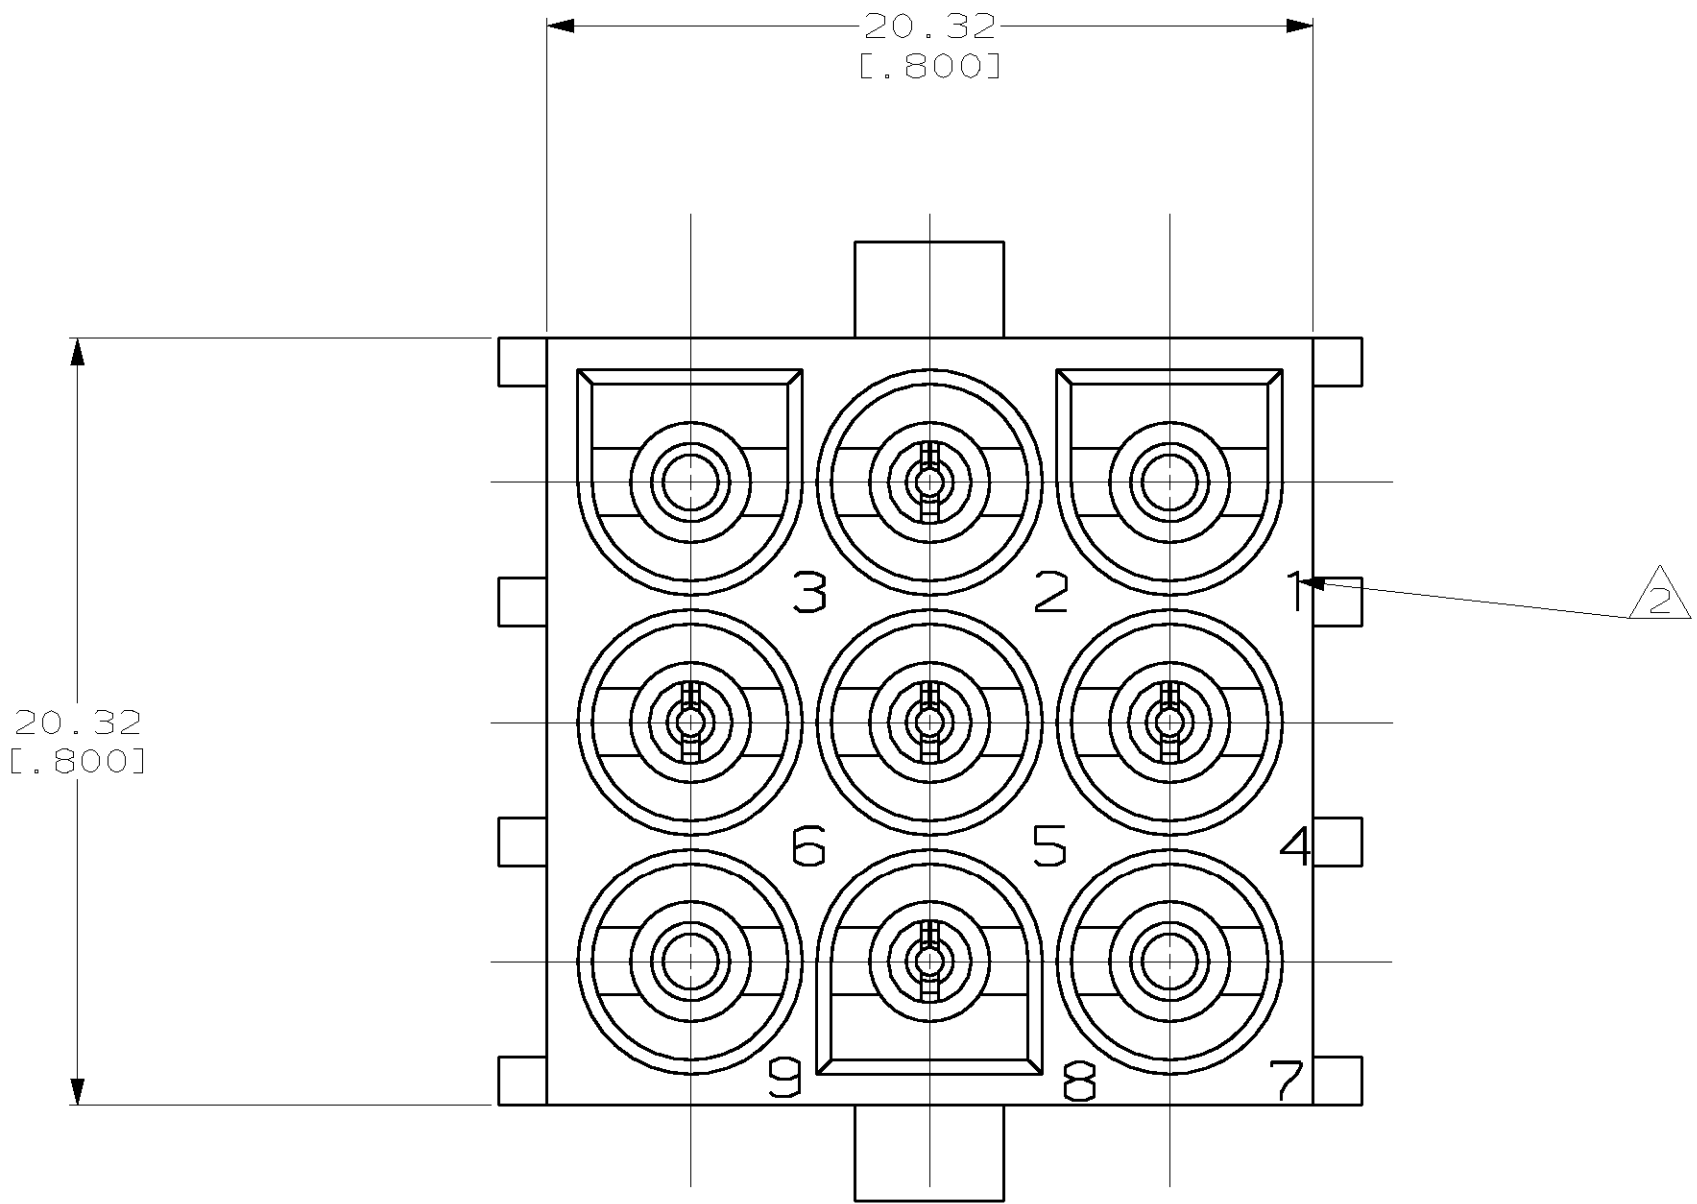
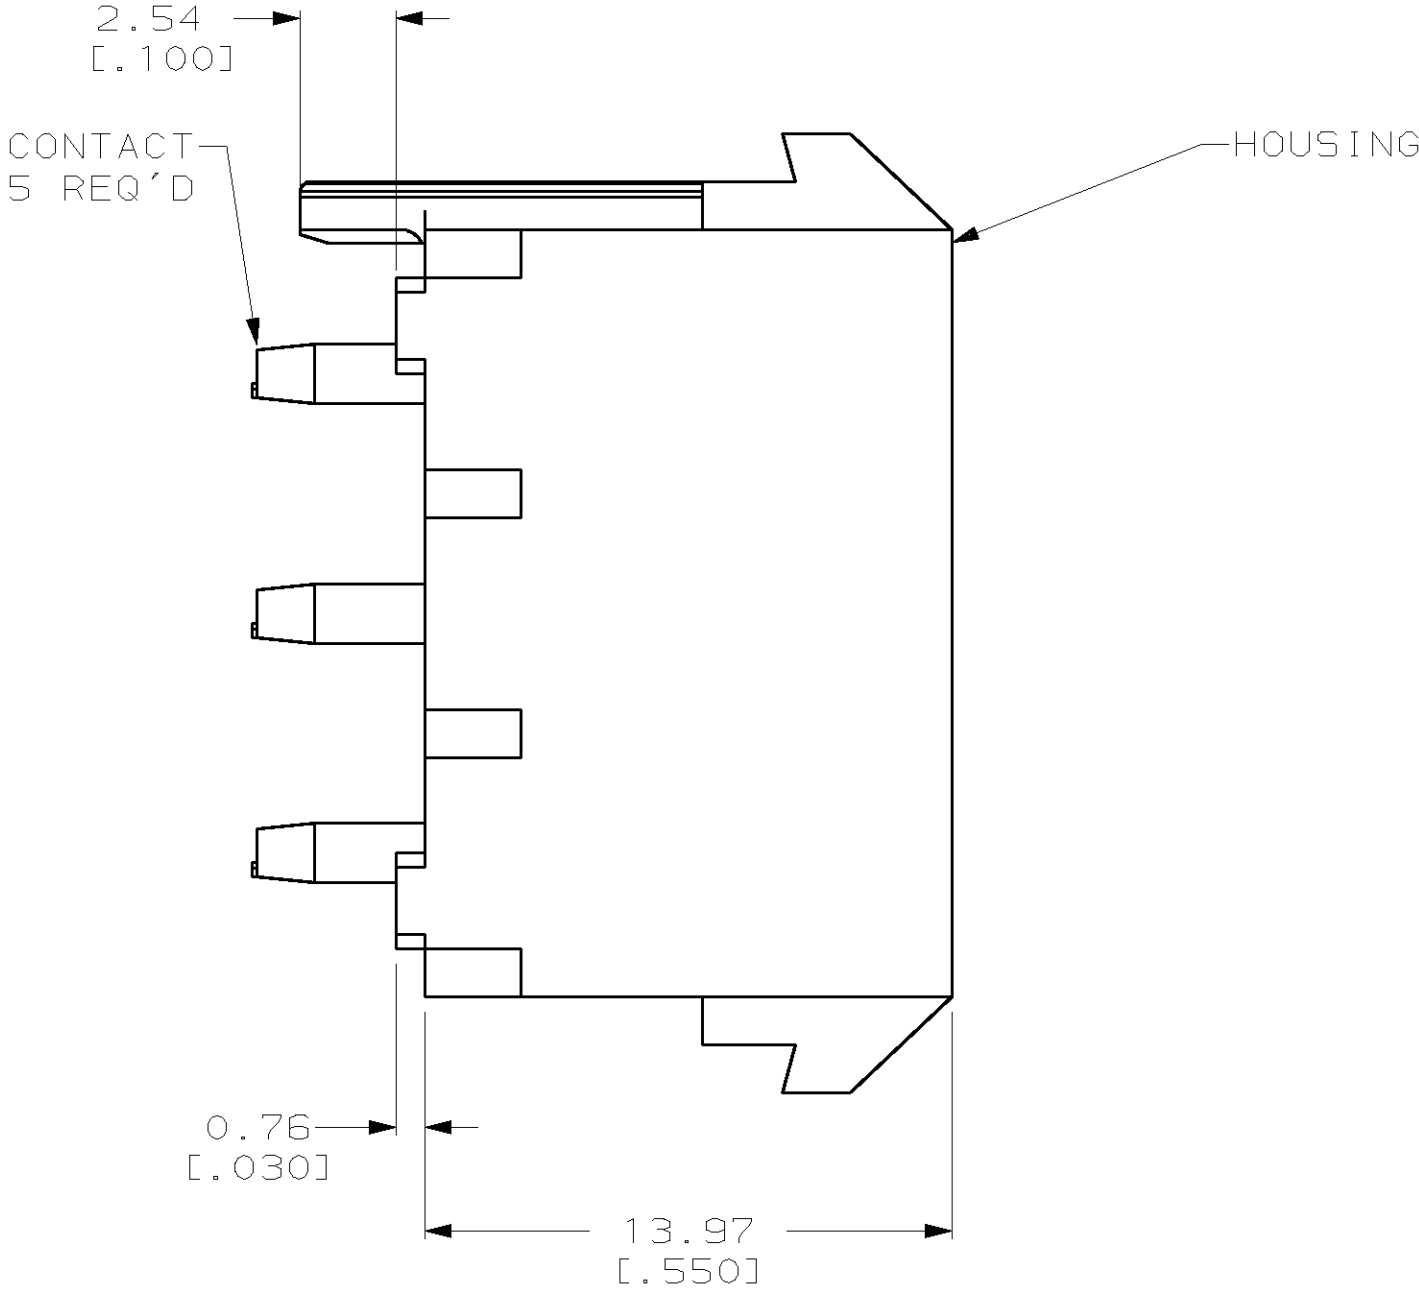


LOC	DIST	REVISIONS					
		F	LTR	DESCRIPTION	DATE	OWN	APVD
CM	53		1	PRE-RELEASED	16-MAY-00	KW	KC


1. PARTS COMPLY WITH AMP SOLDERABILITY SPECIFICATION 109-11-3.

2. CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.



3. DIMENSIONS IN BRACKETS ARE IN INCHES.

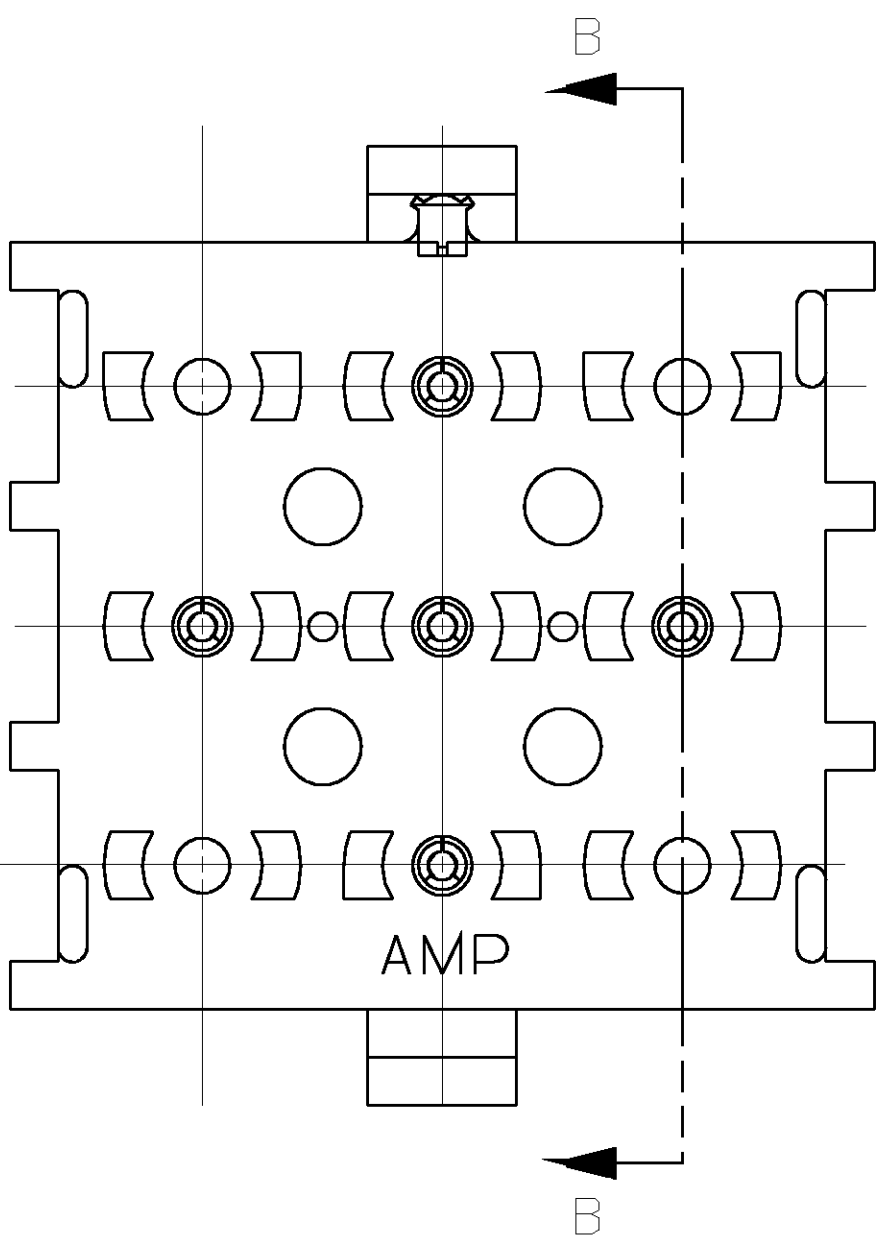

3-DIMENSIONAL MODEL
NTS

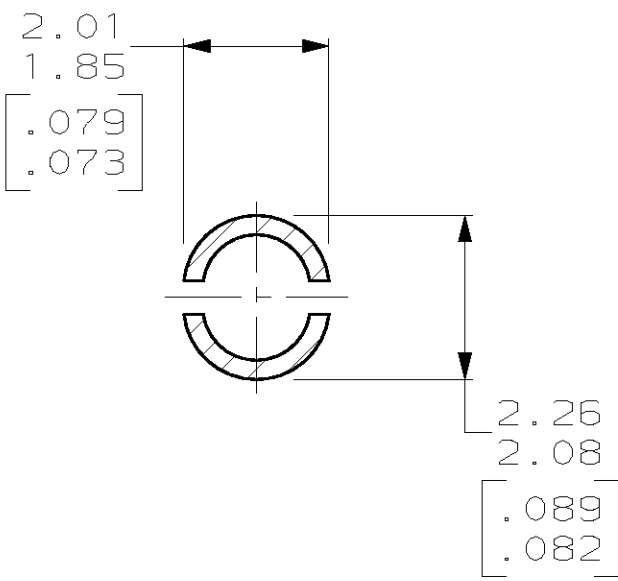

SECTION A-A
SCALE 10:1

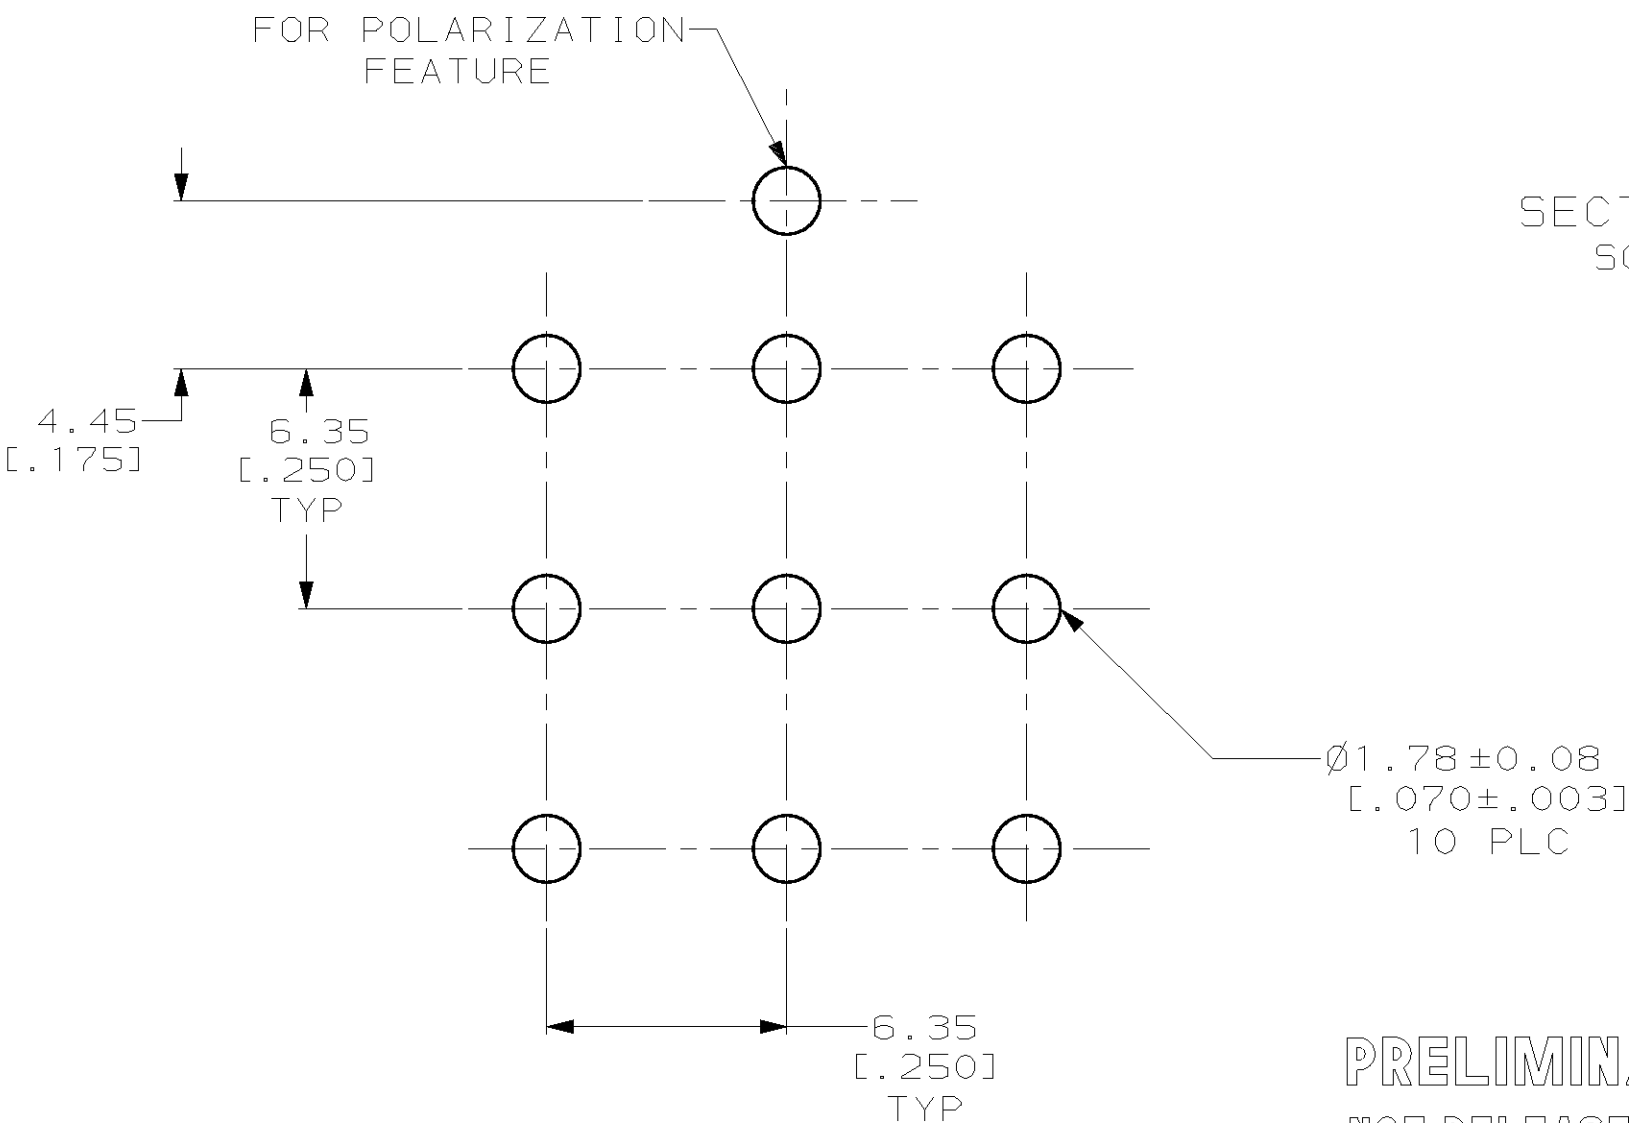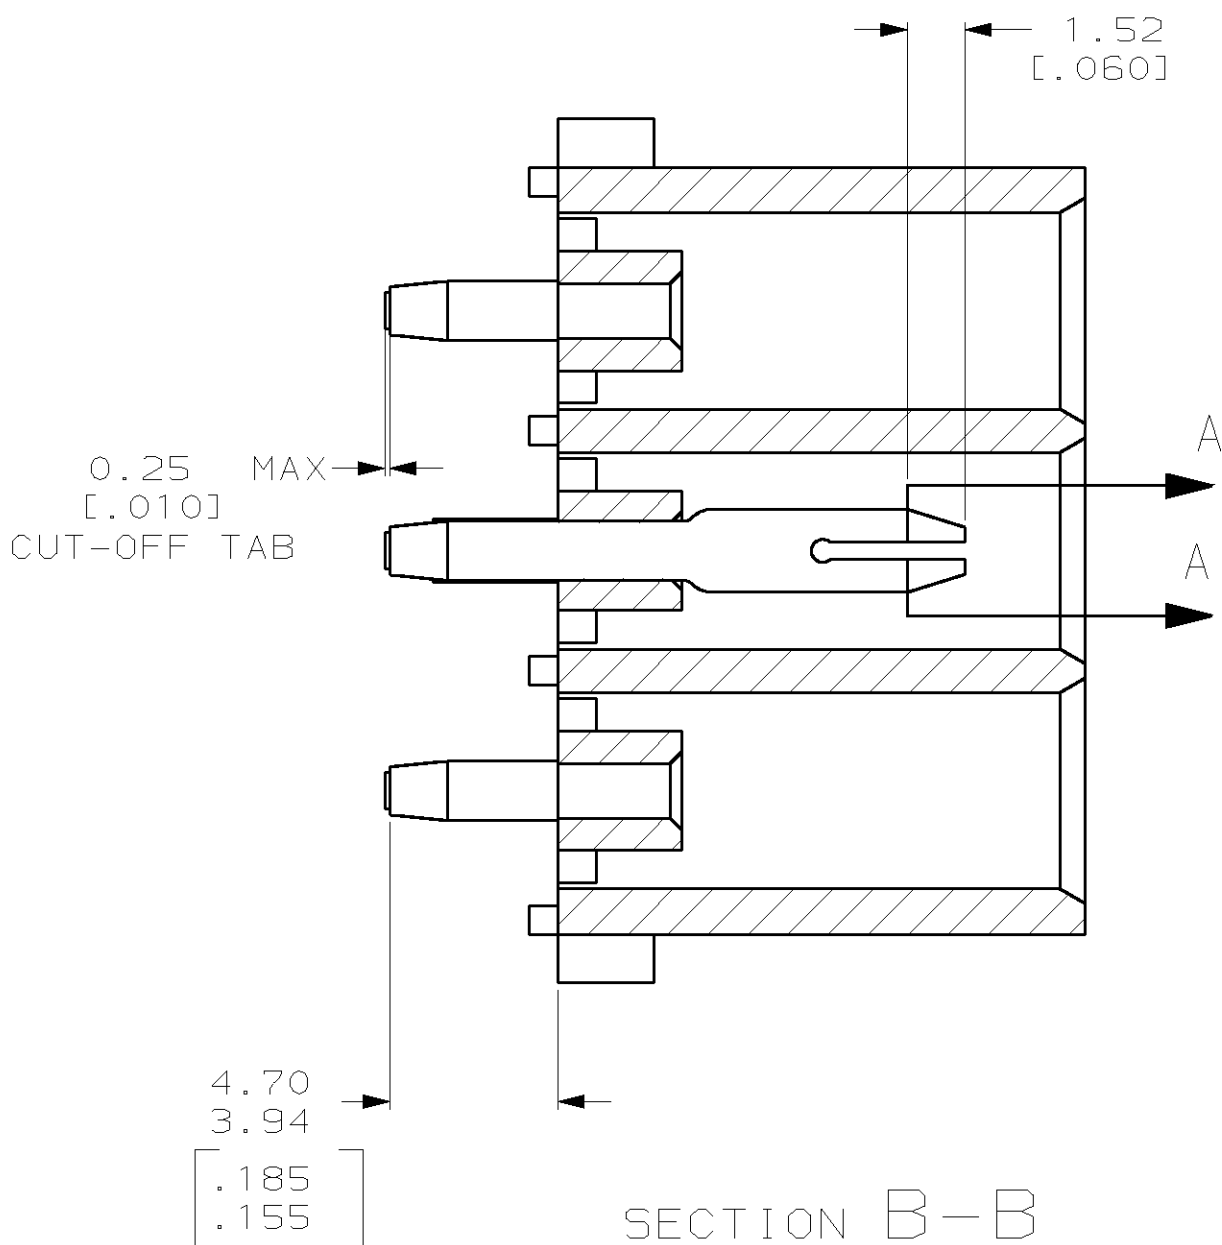

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 [0.062] THICK P.C. BOARD

PRELIMINARY
NOT RELEASED FOR
PRODUCTION

METRIC

PH BRZ	TIN PLATED	NYLON, UL94V-0	WHITE	794795-1
MATERIAL	FINISH	MATERIAL	COLOR	PART NO
PIN		HOUSING		
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER CHK K. COBLE APVD K. COBLE PRODUCT SPEC APPLICATION SPEC WEIGHT CUSTOMER DRAWING	16-MAY-2000 16-MAY-2000 16-MAY-2000 NAME AMP Incorporated Harrisburg, PA 17105-3608 PIN HEADER ASSEMBLY, POLARIZED, 9 CIRCUIT, SPECIAL, UNIVERSAL MATE-N-LOK™ SIZE CAGE CODE DRAWING NO RESTRICTED TO	
DIMENSIONS INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED.	0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES	± ± ± ±0.13 [0.005] ± ±	
MATERIAL	FINISH	SEE TABLE	SEE TABLE	
SCALE 5:1		SHEET 1 OF 1 REV 1		