




FLEXSTRIP* JUMPERS

+CONDUCTOR PITCH "A"	MARGIN C (min.)	THICKNESS D (MAX.)	PIN DIAMETER E ±0,025 (±0.01")		NUMBER OF CONDUCTORS
Cat.Ref. mm (inch)	mm (inch.)	mm (inch.)	mm	(inch.)	min. max.
1 1,27 .050"	0,25 .010"	0,64 .025"	0,320	.0126"	2 - 30
6 1,90 .075"	0,38 .015"	0,84 .033"	0,404	.0159"	2 - 30
2 2,54 .100"	0,51 .020"	0,84 .033"	0,511	.0201"	2 - 30
3 3,18 .125"	1,52 .060"	0,84 .033"	0,511	.0201"	2 - 25
4 3,81 .150"	1,52 .060"	0,84 .033"	0,511	.0201"	2 - 20
5 5,08 .200"	1,52 .060"	0,84 .033"	0,511	.0201"	2 - 15

2/86

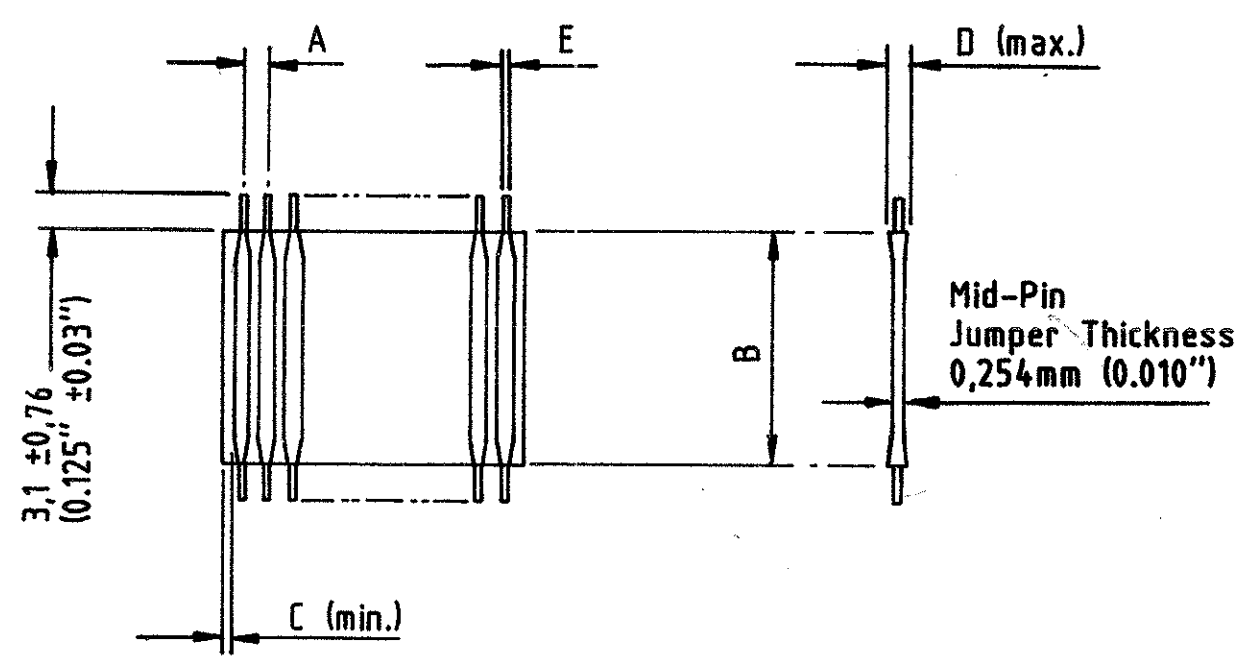


Dimensions are shown in mm (inches.)
+ Tolerance on Pitch ±0,25 (0.01") non-cumulative.

INSULATION LENGTH B ±1.57 (±0.062")		
mm	(inch)	Cat. Ref.
25.4	1	1
38.1	1½	1.5
50.8	2	2
63.5	2½	2.5
76.2	3	3
88.9	3½	3.5
101.6	4	4
114.3	4½	4.5
127	5	5
139.7	5½	5.5
152.4	6	6

PROPERTIES :-
Insulation Material - Nomex#
Temperature Rating - 105°C
Current Rating - 2 amps
U.L. Style Number - 5188

NOTES:-
* Trademark of Thomas & Betts Corporation
* Registered trademark of E.I. Du Pont de Nemours

CATALOGUE NUMBERING SYSTEM

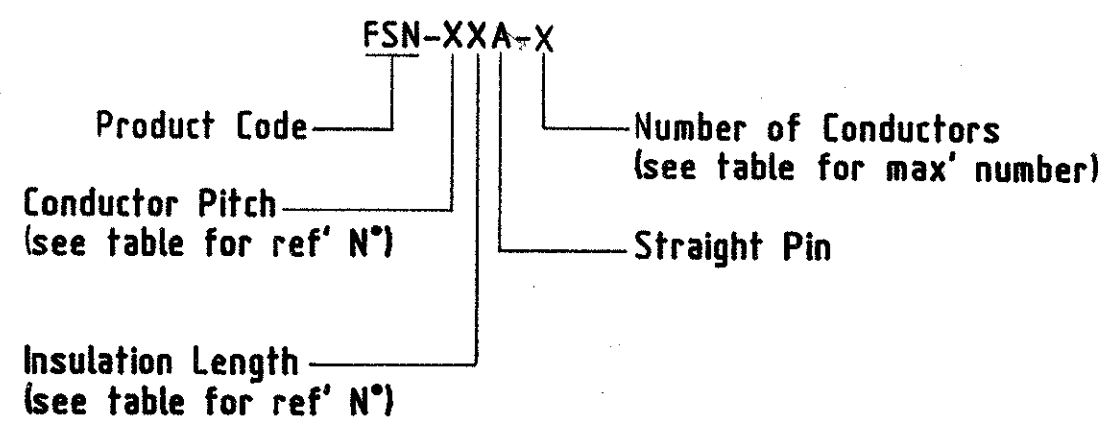


EXAMPLE:-
FSN -22A - 15

FSN - Flexstrip Jumper With Nomex Insulation
2 - Conductor Pitch 2.54 (0.100)
2 - Insulation Length 50.8 (2)
A - Straight Pin
15 - Number of Conductors 15

T&B THOMAS & BETTS INTERNATIONAL
EUROPEAN ENGINEERING DIVISION

DRG. N°
3S-10018

IMPERIAL DIMENSIONS SHOWN THUS []
TOLERANCES
0000 EQUALS ± .0002
000 EQUALS ± .003
00 EQUALS ± .015



THIRD ANGLE PROJECTION

MATERIAL	PART NAME
HEAT TREAT	PRODUCT CODE
FINISH	TOLERANCES UNLESS OTHERWISE SPECIFIED
SCALE	
DR.	FSN-21A-3
CH.	=
APP.	
REV	DESCRIPTION
	DATE
	BY

tyco C.9-1437139-7
Electronics REV 0 SHT 1 of 1