THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST
AL	2

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D2	REVISED PER ECR-20-100299	10AUG2020	BDA	W W

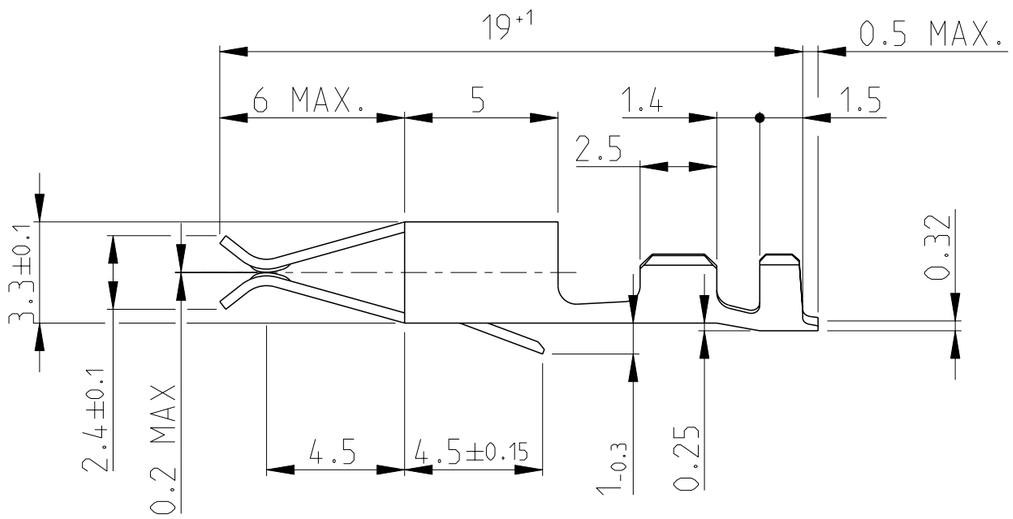

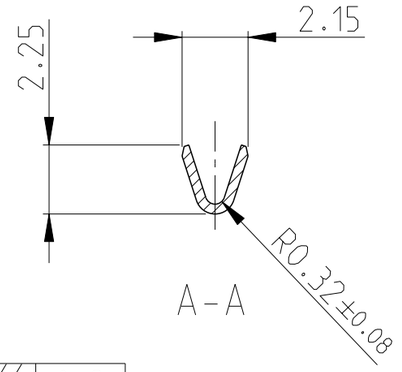

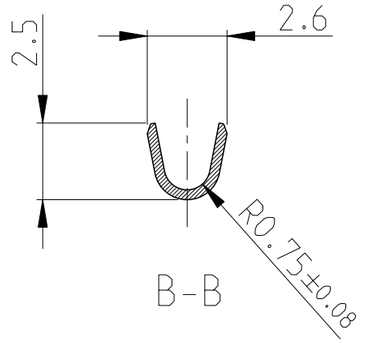

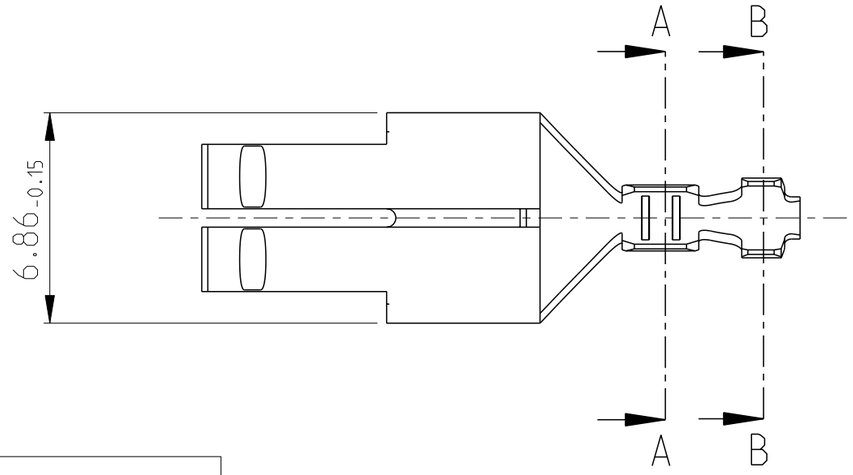

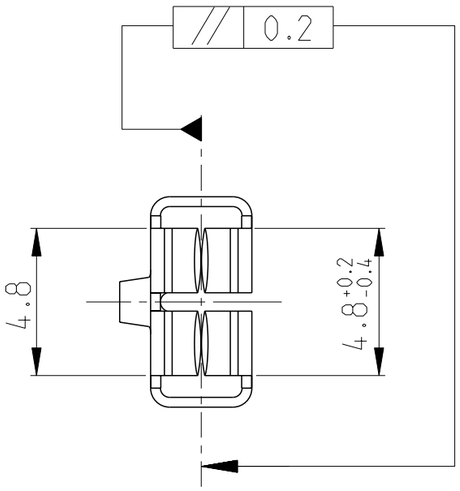

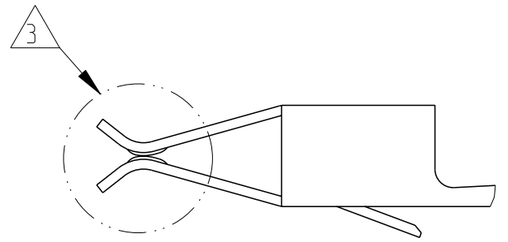

CROSS-SECTION IN mm²									
	SINGLE CONNECTION	0.20	0.25	0.35	0.50				
0.20	X								
0.25	X								
0.35	X								
0.50	X								

NOTES

1 WIRE RANGE 0.2 - 0.5 mm²
2 INSULATION RANGE ∅1.0 - 1.6
△3 SELECTIVE LUBRICATED IN INDICATED AREA WITH ANTI-FREETING LUBRICANT

	TIN (vorverzinnt)	CuZn30	△3 1-926984-1	D
926985-2	TIN (vorverzinnt)	CuSn4	926984-2	D
926985-1	TIN (vorverzinnt)	CuZn30	926984-1	D
LOOSE PIECE	FINISH	MATERIAL	PART NO.	REV.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ± ±0.2
3 PLC ±
4 PLC ±
ANGLES ±

MATERIAL -
FINISH -

DWN	JS	10-Aug-20
CHK	XP	10-Aug-20
APVD	RS	10-Aug-20
PRODUCT SPEC	108-18054 (DES. OBJ.)	
APPLICATION SPEC	114-18080	
WEIGHT	-	

TE Connectivity

NAME STANDARD TIMER CONTACT
-
-

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-926984	

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 1 | REV D2