

4

3

2

1

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
D	REVISED PER ECN #T-11039	1/12/89	J.B.
E	REVISED PER DCR# T-29381	6/25/2001	M.HIGGY

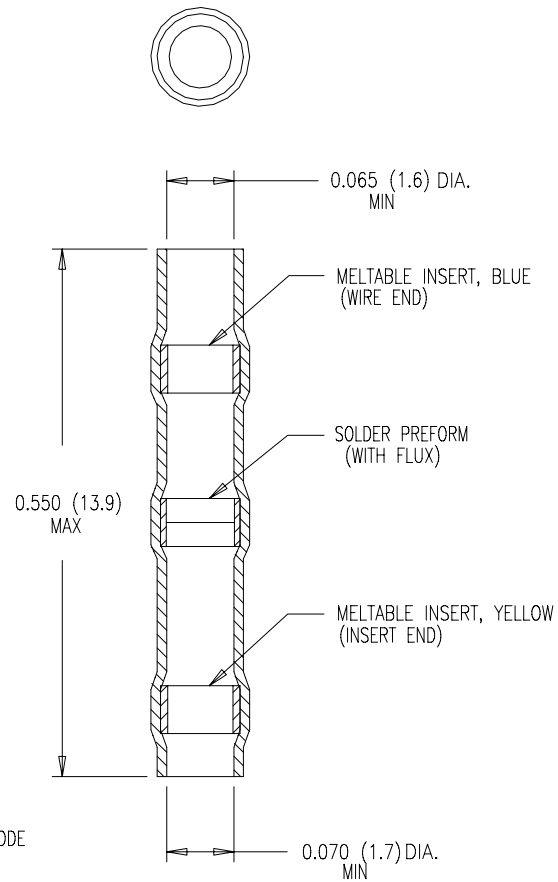


FIGURE 1


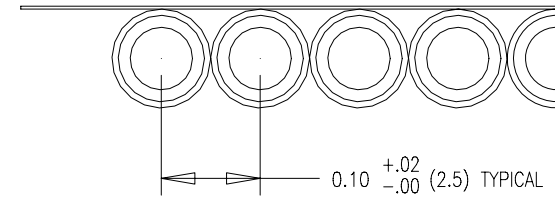


FIGURE 2

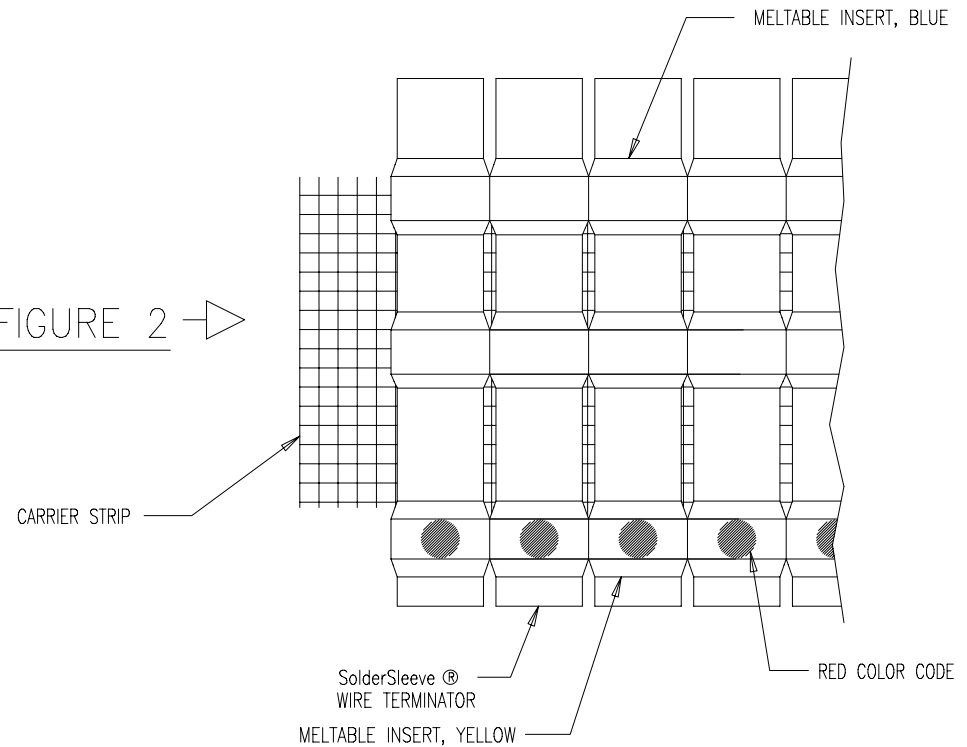

5. SolderSleeve® WIRE TERMINATOR IS SUPPLIED ON A CARRIER STRIP PER FIG. 2. EACH REEL HAS 1000 PIECES ON A CARRIER STRIP. OTHER QUANTITIES SUPPLIED PER SPECIFICATION.

4. WEIGHT (MAX): 0.00013 LBS. [0.06 GR.] (INDIVIDUAL PIECE).

3. CONFIGURATION CONTROL PER ES 71001 APPLIES.

2. THIS SLEEVE IS DESIGNED TO ATTACH 24 GAGE TIN OR SILVER PLATED CONDUCTORS TO TERMINALS OF A Raychem MTC100 SERIES INSERT.

1. MATERIAL:

A. INSULATION SLEEVE; HEAT SHRINKABLE, RADIATION CROSSLINKED MODIFIED POLYVINYLIDENE FLUORIDE, TRANSPARENT BLUE.

B. SOLDER PREFORM; SOLDER TYPE: Sn63 FLUX TYPE: RA PER QQ-S-571

C. MELTABLE INSERTS; LOW OUTGASSING IMMERSION RESISTANT THERMOPLASTIC.

NOTES:

If this document is printed it becomes uncontrolled. Check with the web for latest revision.

SPECIFICATION CONTROL DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE IN BRACKETS.	DRAWN	LUTTICHEN	4-30-86
	CHECKED	J.B.	5-1-86
	APPROVED	J.B.	5-1-86
	APPROVED	J.C.	5-1-86
	CAD NAME	T29381.DWG	
DECIMALS	[mm]		
.XXX ±			
.XX ±			
ANGLES			
.X ±			
WEIGHT:	MAXIMUM SEE NOTE 4		
THIRD ANGLE PROJECTION			

tyco/Electronics/Raychem				WIRE AND HARNESSING PRODUCTS 307 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025	
TITLE SolderSleeve® WIRE TERMINATOR FOR 24 GAGE WIRE SIZE TEMPERATURE RATING 125° C MTC100 SERIES					
SIZE	CODE IDENT. NO.	DWG. NO.			REV
C	06090	CTA-1031			E
DO NOT SCALE THIS DRAWING					SHEET 1 OF 1

4

3

2

1

SHEET CTA-1031 DWG NO.