

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20





© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	28AUG2017	CH	CW

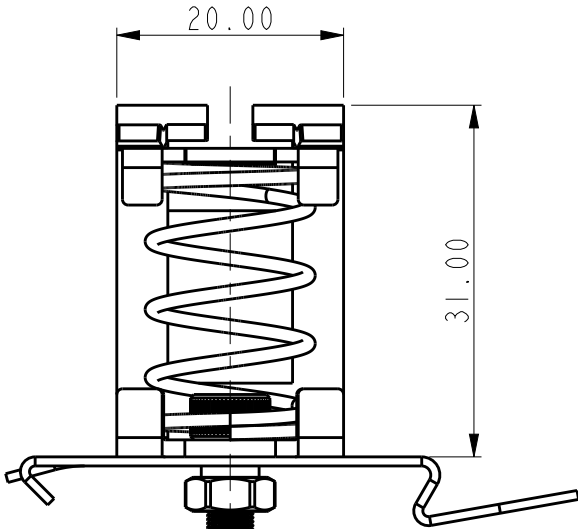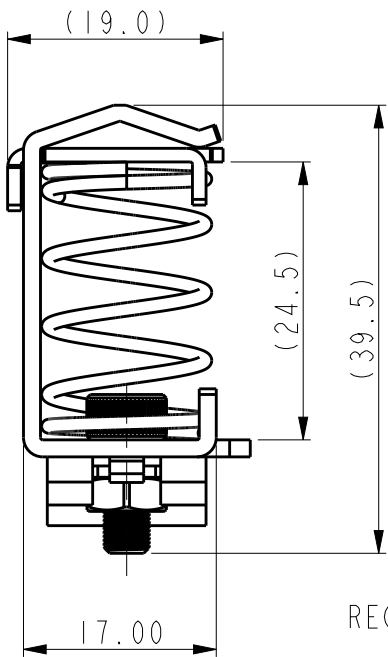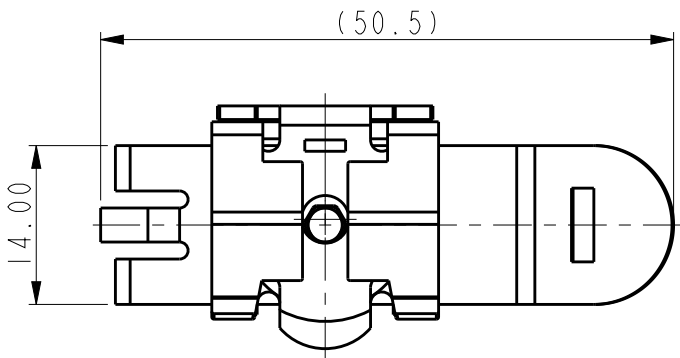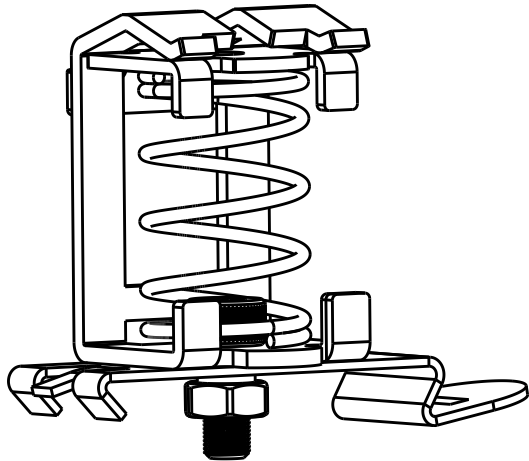

M4 SCREW,
RECOMMENDED TIGHTENING TORQUE 1.2Nm
M4螺丝, 推荐扭力矩为 1.2Nm


NOTES:

1. TECHNICAL CHARACTERISTICS:
BODY MATERIAL: SPCC
BODY SURFACE: ZINC PLATED
2. WIRE RANGE: 4-13.5mm².
3. MOUNTING RAIL: 35 mm STANDARD DIN RAIL.

注释:

1. 技术参数:
主体材料: 冷轧板
主体表面处理: 镀锌
2. 夹线范围: 4-13.5mm².
3. 适用导轨: 35mm标准DIN导轨.

T3930041301-000	SKTP4-13SC	CABLE SHIELDED CLIP WITH LOCKING PIECE (WIRE RANGE 4-13.5) 电缆屏蔽夹子, 卡片式 (通线 4-13.5)
PART NUMBER 零件料号	PART DESCRIPTION 零件描述	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 28AUG2017 CHARLIE.HU	 TE Connectivity																				
DIMENSIONS: mm		CHK 28AUG2017 GINO.YAO																					
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME SKTP4-13SC																				
	0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-																						
	MATERIAL		PRODUCT SPEC		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO												
	FINISH		APPLICATION SPEC		A3		-		C-T3930041301000		-												
		WEIGHT		CUSTOMER DRAWING								SCALE		3:2		SHEET		1 OF 1		REV		A	