



## 315 CABLE ASSEMBLY

IEPE plug and play accelerometer cable assembly for triaxial accelerometers. Featuring 4-pin Microtech connector and three BNC connectors. Standard cable length is 120 inches. Mates with accelerometer models 7131A, 7132A & 7132AHT



### FEATURES

- TPE Jacket (FEP for 315HT)
- PFA Insulated #28 AWG Conductors
- SPC Braided Shield
- 4-Pin Microtech Connector and 3x BNC Connector
- -54°C to +125°C Temp Range
- +200°C Option for 315HT Cable


### APPLICATIONS

- IEPE Triaxial Accelerometers
- Laboratory Testing
- Vibration Monitoring
- General Purpose
- Modal Testing

DIMENSIONS

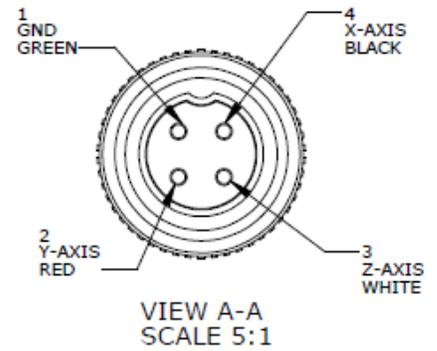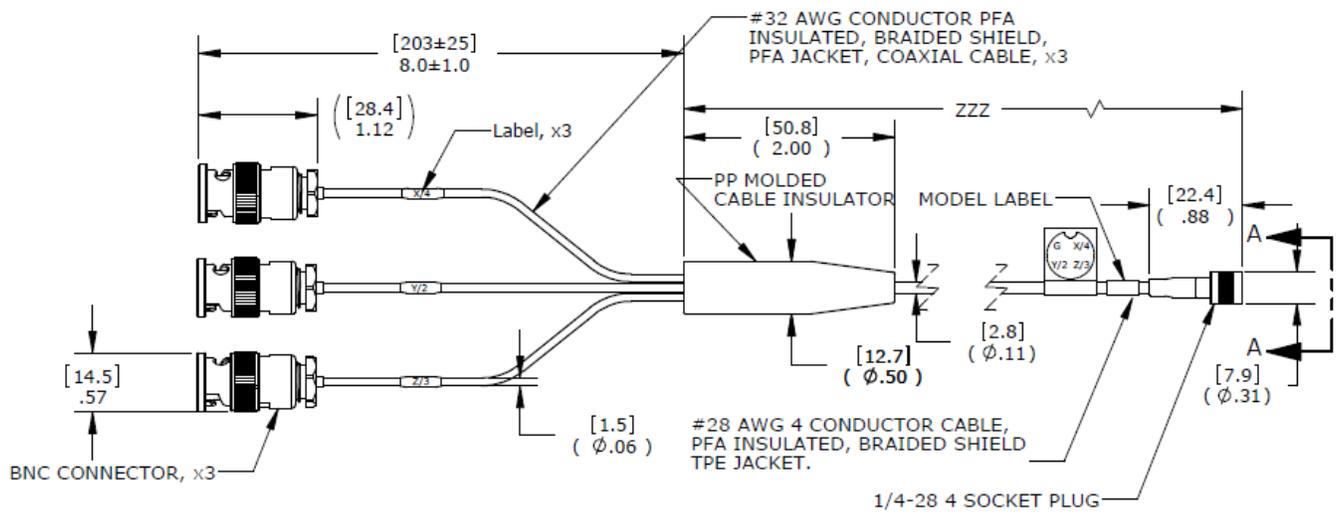

SCHEMATIC

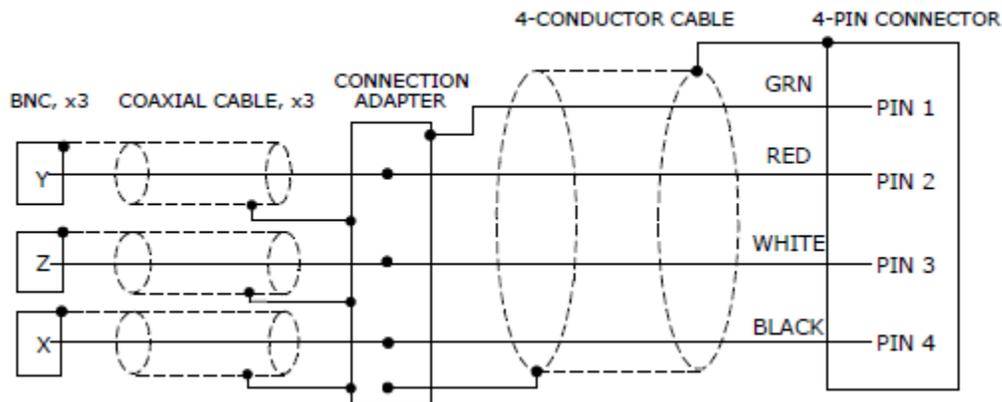

### ORDERING INFORMATION

315  
315HT - ZZZ

#### Cable length

120=120 inches (10ft)

240=240 inches (20ft)

360=360 inches (30ft)

Example; 315-120

Model 315 cable, 120inch cable length (standard length typically in stock)

#### NORTH AMERICA

Measurement Specialties, Inc.,  
a TE Connectivity Company  
Tel: 800-522-6752  
[customercare.akm@te.com](mailto:customercare.akm@te.com)

#### EUROPE

MEAS France SAS  
a TE Connectivity Company  
Tel: +31 73 624 6999  
[customercare.lcsb@te.com](mailto:customercare.lcsb@te.com)

#### ASIA

Measurement Specialties (China), Ltd.,  
a TE Connectivity Company  
Tel: 0400-820-6015  
[customercare.shzn@te.com](mailto:customercare.shzn@te.com)

#### [te.com/sensorsolutions](http://te.com/sensorsolutions)

TE Connectivity, TE, and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, products and/or company names referred to herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2018 TE Connectivity Ltd. family of companies All Rights Reserved.