

## MS5837

# PERIPHERAL MODULE

### Digital Barometric & Temperature Pressure Sensor

#### General Description

The MS5837 peripheral module provides the necessary hardware to interface the MS5837 digital barometric pressure and temperature sensor to any system that utilizes Pmod compatible expansion ports configurable for I<sup>2</sup>C communication. The MS5837 sensor is a self-contained pressure and temperature sensor that is fully calibrated during manufacture. The sensor can operate from 1.5V to 3.6V. The sensor module includes a high-linearity pressure sensor and an ultra-low power 24 bit  $\Sigma$  ADC with internal factory-calibrated coefficients.

#### Specifications

- Measures pressure from 0bar to 2 bar
- Measures temperature from -20°C to 85°C
- I<sup>2</sup>C communication
- Fully calibrated
- Fast response time
- Very low power consumption

#### Features

- 12-pin Pmod compatible connector
- I<sup>2</sup>C interface
- Secondary 12-pin connector allows daisy chain
- FPGA fabric available for download
- $\mu$ C C code available for download
- 24-bit resolution for pressure
- 24-bit resolution for temperature
- Parameters stored on chip


# MS5837 PERIPHERAL MODULE

Digital Pressure Sensor

## Performance

- 0 to 2 bar pressure range
- -20°C to 85°C temperature range
- Very low power consumption
- Operates from 1.5V to 3.6V
- High resolution module 0.02mbar(0-2bar)
- Fast conversion time – 0.5 ms typical

## Schematic

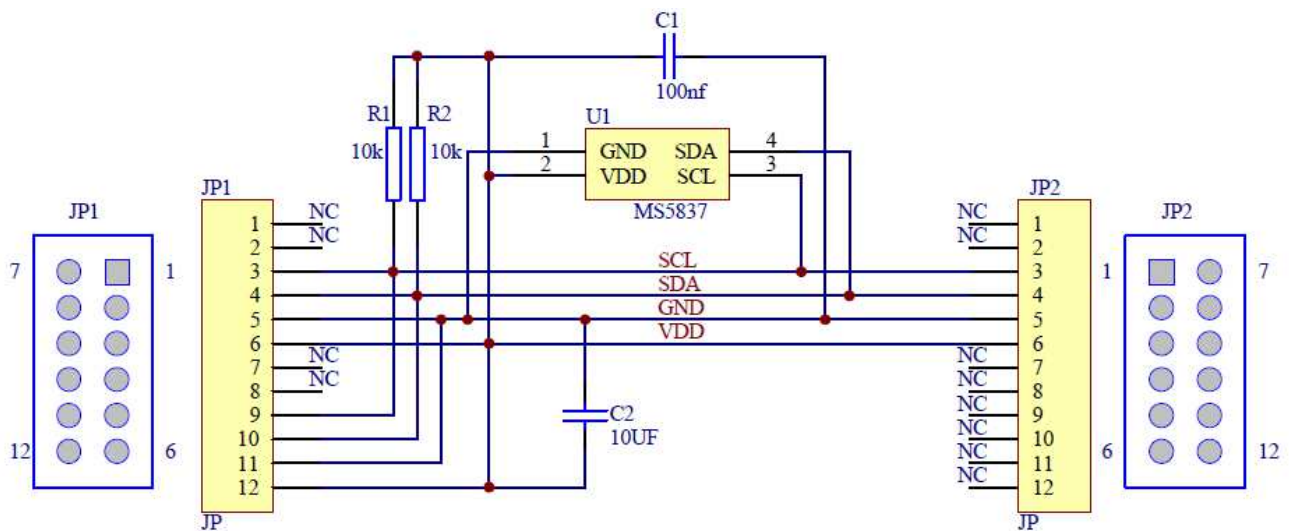

# MS5837 PERIPHERAL MODULE

Digital Pressure Sensor

## Connector Pin Assignments (I<sup>2</sup>C Communications)


System Plug (Table 1)

Connector J1		
Pin No.	Signal	Description
1	N/C	Not Connected
2	N/C	Not Connected
3	SCL	I <sup>2</sup> C Serial Clock
4	SDA	I <sup>2</sup> C Serial Data
5	GND	Ground
6	Vdd	Power Supply
7	N/C	Not Connected
8	N/C	Not Connected
9	SCL	I <sup>2</sup> C Serial Clock
10	SDA	I <sup>2</sup> C Serial Data
11	GND	Ground
12	Vdd	Power Supply

Expansion Socket (Table 2)

Connector J2		
Pin No.	Signal	Description
1	N/C	Not Connected
2	N/C	Not Connected
3	SCL	I <sup>2</sup> C Serial Clock
4	SDA	I <sup>2</sup> C Serial Data
5	GND	Ground
6	Vdd	Power Supply
7	N/C	Not Connected
8	N/C	Not Connected
9	N/C	Not Connected
10	N/C	Not Connected
11	N/C	Not Connected
12	N/C	Not Connected

## Dimensions(mm)

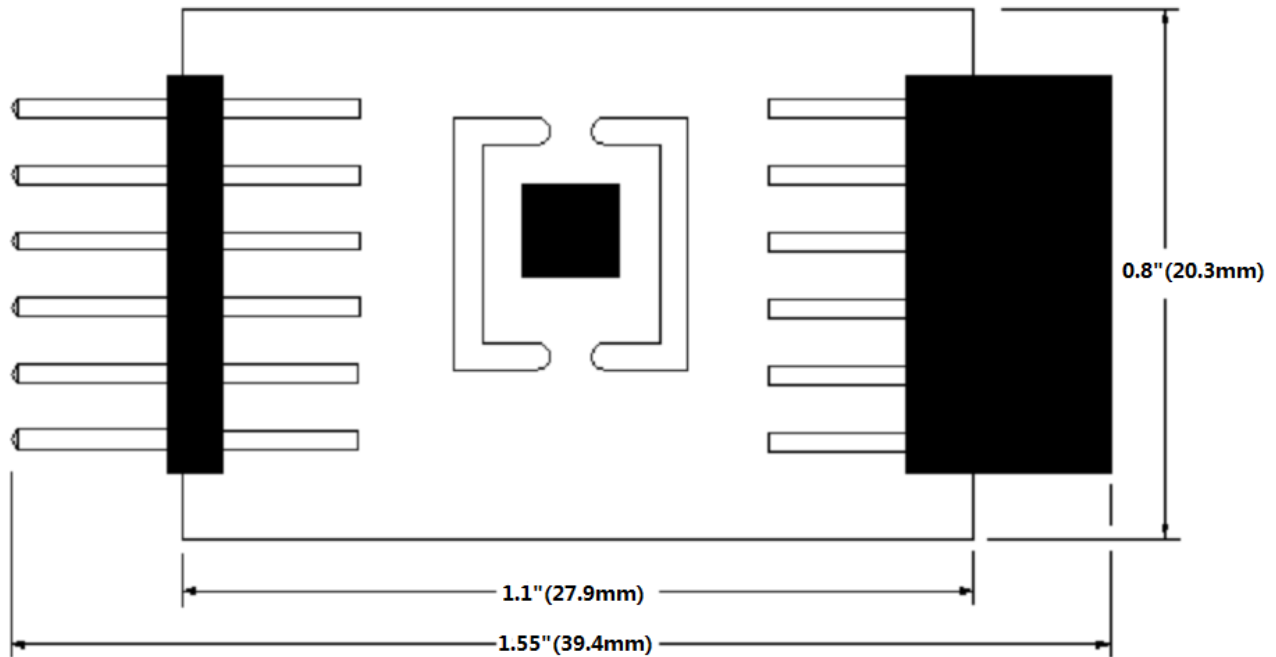

# MS5837 PERIPHERAL MODULE

Digital Pressure Sensor

## Detailed Description

### I<sup>2</sup>C Interface

The peripheral module can interface to the host in one of two ways. It can plug directly into a Pmod-compatible port (configured for I<sup>2</sup>C) through connector J1, or in this case, other I<sup>2</sup>C boards can attach to the same I<sup>2</sup>C bus through connector J2.

### I<sup>2</sup>C Interface (Daisy Chaining Modules)

Alternatively, the peripheral module can connect to other I<sup>2</sup>C-based Pmod modules through the expansion J2 connector. Connector J1 provides connection of the module to the Pmod host. The pin assignments and functions adhere to the Pmod standard as shown in Table 1. The J2 connector allows the module to be connected through a daisy-chain from another I<sup>2</sup>C module and/or provide I<sup>2</sup>C and power connections to other I<sup>2</sup>C modules on the same bus. See Table 2.

### External Control Signals

The IC operates as an I<sup>2</sup>C slave using the standard 2 wire I<sup>2</sup>C connection scheme. The IC is controlled either by the host (through the Pmod connector). In cases where one or more of the SCL and SDA signals are driven from an external source, resistors R1, R2 provide pull-up. However, this also increases the apparent load to the external driving source. If the external source is incapable of driving these loads, they should be removed.

## Reference Material

- Detailed information regarding operation of the IC:  
[MEAS MS5837 Datasheet](#)

## Ordering Information

Description	Part Number
MS5837 PERIPHERAL MODULE	DPP103Z000

### NORTH AMERICA

Measurement Specialties, Inc.,  
a TE Connectivity Company  
Phone: +1-800-522-6752  
[customercare.hmpt@te.com](mailto:customercare.hmpt@te.com)

### EUROPE

MEAS France(Europe)  
a TE Connectivity Company  
Phone: +31 73 624 6999  
[customercare.tise@te.com](mailto:customercare.tise@te.com)

### ASIA

Measurement Specialties (China), Ltd.,  
a TE Connectivity Company  
Phone: +86-400-820-6015  
[customercare.shzn@te.com](mailto:customercare.shzn@te.com)

### [TE.com/sensorsolutions](http://TE.com/sensorsolutions)

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties (MEAS), American Sensor Technologies (AST), TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2017 TE Connectivity Ltd. family of companies All Rights Reserved.