

# AMP


AMP EXTRACTION TOOL P/N 753802-1  
FOR EXTRACTING CONTACT FROM 2.5/2.54MM PITCH, (WAS IS-223J)

## 411-5223

日本イー・イム・ピー株式会社  
AMP (Japan), Ltd.

AMP-ULTREX CONNECTORS  
INSTRUCTION SHEET

RELEASED	30NOV82
REV.	9FEB93

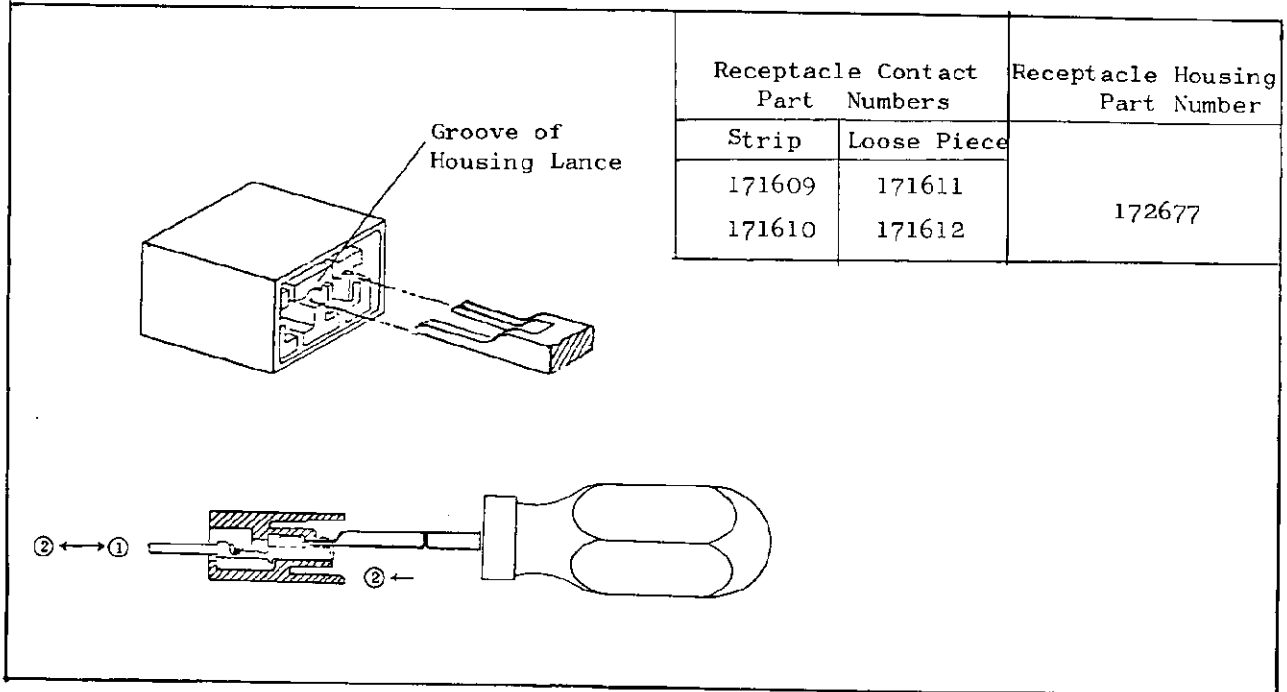

### INTRODUCTION:

AMP Extraction Tool P/N 753802-1 has been designed to extract contact from AMP-ULTREX 2.5/2.54mm Pitch, Receptacle Connectors. Read this instruction sheet carefully before you start operation.

(3) Pull the wire and the contact is pull-out. If not, do not try to pull it forcibly, but repeat the steps (1) and (2) carefully.

### EXTRACTION PROCEDURE:

- (1) Hold the wire of the contact you are to remove, and push back into the housing cavity, so that it moves off from the locking shoulder, becoming relaxed and ready for unlocking.
- (2) Hold the tips of the tool horizontally as shown, and insert them into the contact cavities from the mating side of the housing, lightly as far as they go until they stop at the bottom of housing. This will push up the contact to get unlocked from the inserted position. The contact is now ready for extraction.

### CAUTION:

This tool is dedicated contact removal tool as has been designated for the application of the head-going part numbers. Do not try to use for the purpose other than indicated.