



## ANT-GNRM-L15A Series

### L1/L5 Magnetic Mount Active GNSS Antennas

The GNRM-L15A is a magnetic-mount global navigation satellite system (GNSS) antenna with integrated low noise amplifier (LNA), supporting GPS, Galileo, GLONASS, Beidou, NavIC and QZSS systems in the L1/E1/B1 and L5/E5/B2A bands.

The LNA provides high gain with a low noise figure. The antenna terminates in an SMA plug (male pin) connector on 1 meter, 3 meter or 5 meter lengths of RG-174/U coaxial cable.

#### FEATURES

- Performance at 1575.42 MHz
  - VSWR:  $\leq 1.3$
  - Peak Gain: 30.5 dBi
  - Axial Ratio: 14.5 dB
- Performance at 1176.45 MHz
  - VSWR:  $\leq 1.3$
  - Peak Gain: 28.9 dBi
  - Axial Ratio: 14.1 dB
- 28 dB (Typ.) LNA
- Ground plane independent
- Right-hand circularly polarized (RHCP)
- Mounts to metal surfaces using integrated magnetic base

#### APPLICATIONS

- Global navigation
  - GPS L1C, L1C/A, L5
  - Galileo E1, E5A
  - GLONASS L1
  - Beidou B2A, B1C
  - NavIC
  - QZSS L1, L5
- Timing solutions

#### ORDERING INFORMATION

| Part Number     | Description                                                                                                     |
|-----------------|-----------------------------------------------------------------------------------------------------------------|
| ANT-GNRM-L15A-1 | GNSS L1/L5 band magnetic-mount antenna with SMA plug (male pin) connector on 1 meter of RG-174/U coaxial cable  |
| ANT-GNRM-L15A-3 | GNSS L1/L5 band magnetic-mount antenna with SMA plug (male pin) connector on 3 meters of RG-174/U coaxial cable |
| ANT-GNRM-L15A-5 | GNSS L1/L5 band magnetic-mount antenna with SMA plug (male pin) connector on 5 meters of RG-174/U coaxial cable |

Available from Linx Technologies and select distributors and representatives.

**TABLE 1. ELECTRICAL SPECIFICATIONS, ANTENNA PLUS LNA**

| Frequency                 | GPS Bands                                                            | VSWR (max.) | Return Loss (dB) | Peak Gain (dBi) | Axial Ratio (dB) |
|---------------------------|----------------------------------------------------------------------|-------------|------------------|-----------------|------------------|
| 1176 MHz                  | GPS L5, Galileo E5A, Beidou B2A, NavIC L5, QZSS L5                   | 1.3         | -16.6            | 28.9            | 14.1             |
| 1561 MHz                  | Beidou B1I                                                           | 1.3         | -18.4            | 27.2            | 16.8             |
| 1575 MHz                  | GPS L1C, GPS L1C/A, Galileo E1, Beidou B1C, QZSS L1                  | 1.3         | -18.4            | 30.5            | 14.5             |
| 1601/1602 MHz             | GLONASS L1                                                           | 1.2         | -22.7            | 30.5            | 30.2             |
| Output Impedance          | 50 $\Omega$                                                          |             |                  |                 |                  |
| Polarization              | RHCP                                                                 |             |                  |                 |                  |
| Radiation                 | Directional radiation pattern orthogonal to antenna surface          |             |                  |                 |                  |
| Electrical Type           | Radiating Patch plus LNA                                             |             |                  |                 |                  |
| Input Voltage             | Min. 2.7 V, Typ. 3.3 V, Max. 5.0 V                                   |             |                  |                 |                  |
| Current Consumption @3.3V | Typ. 10.0 mA, Max. 15.0 mA                                           |             |                  |                 |                  |
| Noise Figure (dB)         | 1.0 (1561 MHz), 1.0 (1575.42 MHz), 1.0 (1602 MHz), 1.0 (1176.45 MHz) |             |                  |                 |                  |
| ESD Sensitivity           | Low ESD sensitivity. As a best practice, Linx may use ESD packaging. |             |                  |                 |                  |

Electrical specifications and plots measured with a 102 mm x 102 mm (4.0 in x 4.0 in) metal plate

**TABLE 2. MECHANICAL SPECIFICATIONS, ANTENNA PLUS LNA**

| Part Number           | Connection                                                | Coaxial Cable, minimum inside bend radius | Weight                       |
|-----------------------|-----------------------------------------------------------|-------------------------------------------|------------------------------|
| ANT-GNRM-L15A-1       | SMA plug (male pin)                                       | RG-174/U: 10.2 mm (0.40 in),              | 1 meter = 51.3 g (1.81 oz)   |
| ANT-GNRM-L15A-3       | SMA plug (male pin)                                       | RG-174/U: 10.2 mm (0.40 in),              | 3 meters = 78.1 g (2.75 oz)  |
| ANT-GNRM-L15A-5       | SMA plug (male pin)                                       | RG-174/U: 10.2 mm (0.40 in),              | 5 meters = 104.9 g (3.70 oz) |
| Operating Temp. Range | -40 °C to +85 °C                                          |                                           |                              |
| Storage Temp. Range   | -40 °C to +85 °C                                          |                                           |                              |
| Dimensions            | 40.5 mm x 38.0 mm x 16.3 mm (1.59 in x 1.50 in x 0.64 in) |                                           |                              |

## GROUND PLANE INDEPENDENT OPERATION

Because of the significant signal gain provided by the antenna's LNA, the ground plane typically required for passive GNSS antenna gain performance is not required for active GNSS antennas.

## MOUNTING

The ANT-GNRM-L15A series antenna has an integrated magnetic base which mounts securely to ferrous metallic surfaces. The antenna should be mounted in a location that is not obstructed by other metallic surfaces which could interfere with signal transmission and reception. The magnetic base allows for the antenna to be repositioned as needed.

## PACKAGING INFORMATION

The ANT-GNRM-L15A series antenna is packaged in cartons of 100 pcs. Distribution channels may offer alternative packaging options.

## PRODUCT DIMENSIONS

Figure 1 provides dimensions of the ANT-GNRM-L15A series antenna.

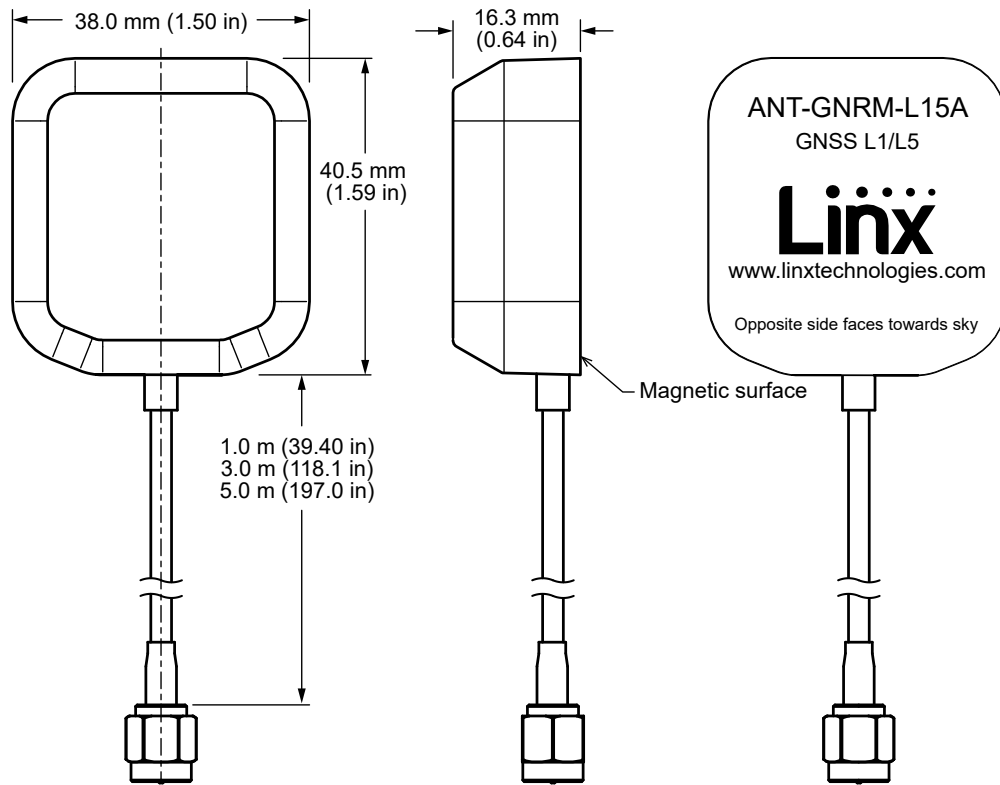


Figure 1. ANT-GNRM-L15A Series Antenna Dimensions

## ANTENNA ORIENTATION

The ANT-GNRM-L15A antenna is characterized on a metal plate (102 mm x 102 mm) as shown in Figure 2 providing insight into antenna performance when attached to a metal enclosure. The charts on the following pages represent data taken with the antenna oriented at the center of the metal plate.

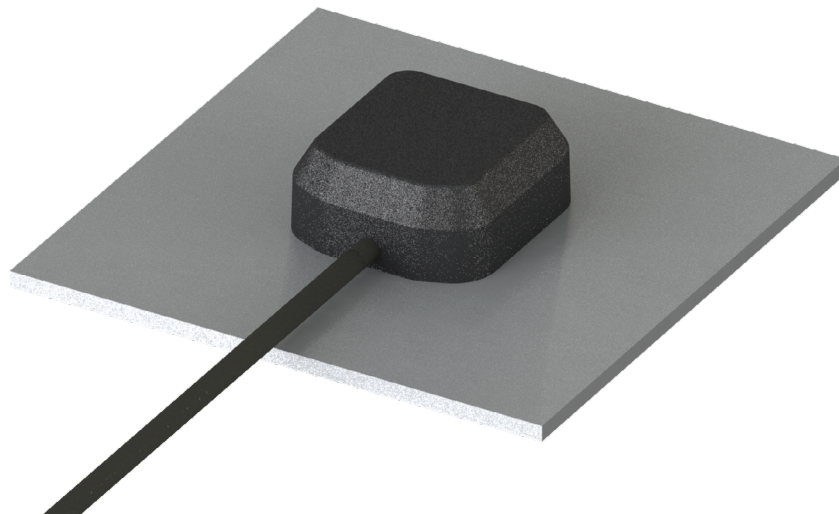


Figure 2. ANT-GNRM-L15A Test Orientation

## VSWR

Figure 3 provides the voltage standing wave ratio (VSWR) across the L1 band, and Figure 4 provides VSWR across the L5 Band.

VSWR describes the power reflected from the antenna back to the radio. A lower VSWR value indicates better antenna performance at a given frequency. Reflected power is also shown on the right-side vertical axis as a gauge of the percentage of transmitter power reflected back from the antenna.

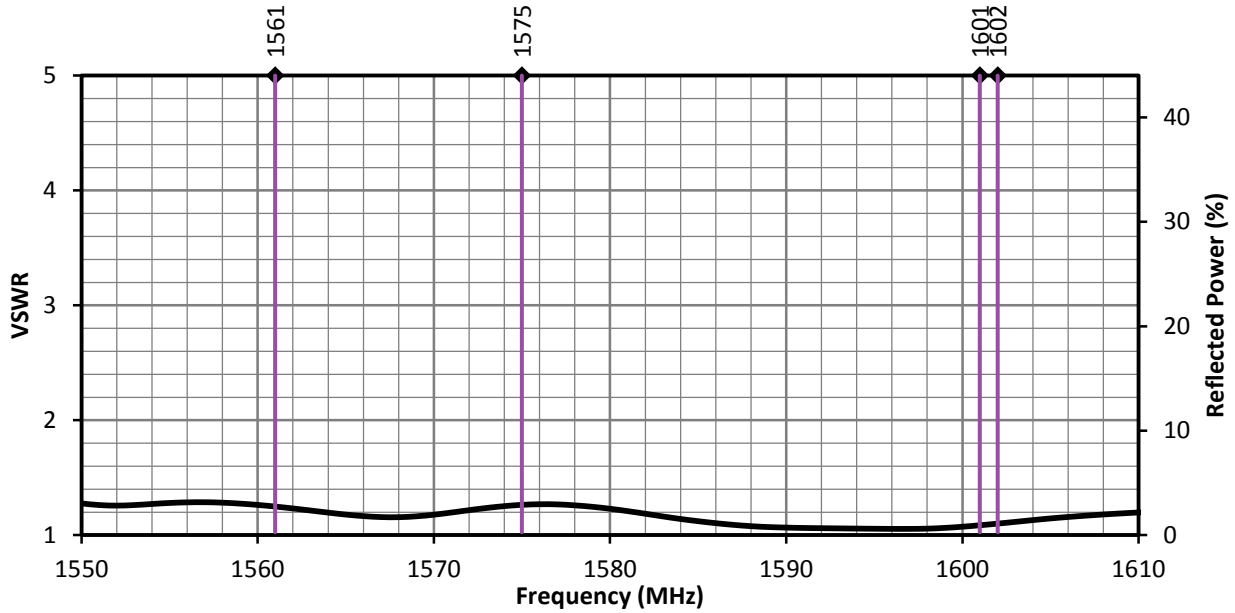


Figure 3. ANT-GNRM-L15A Series Antenna VSWR, L1 Band

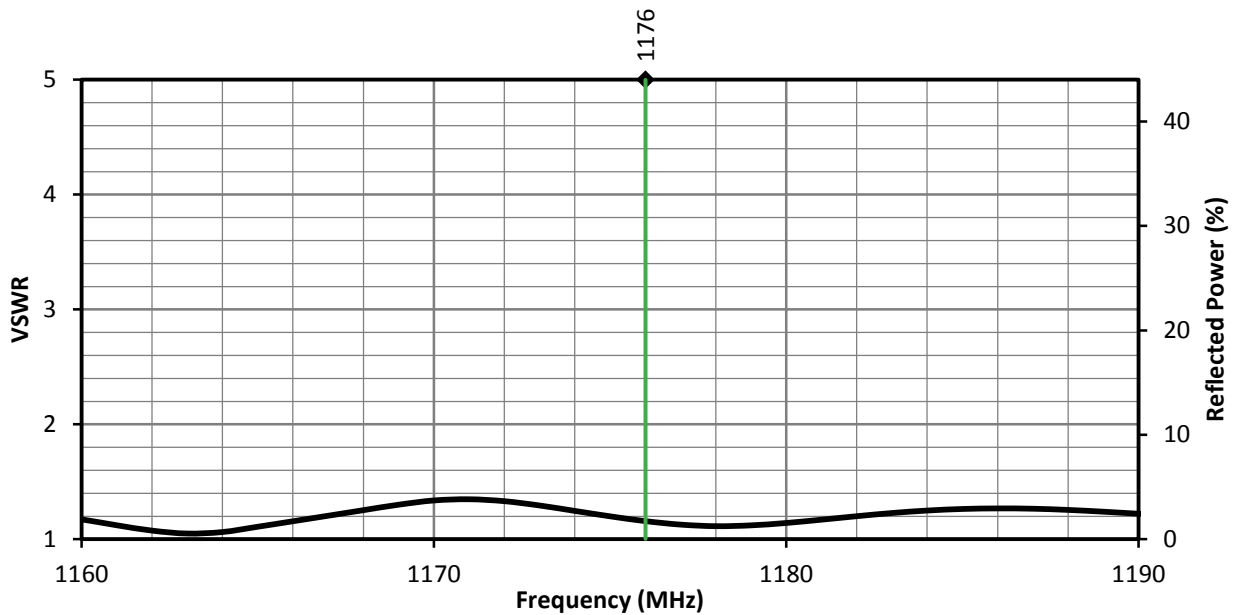


Figure 4. ANT-GNRM-L15A Series Antenna VSWR, L5 Band

## RETURN LOSS

Return loss, shown in Figure 5, (L1 band) and Figure 6 (L5 band) represents the loss in power at the antenna due to reflected signals. Like VSWR, a lower return loss value indicates better antenna performance at a given frequency.

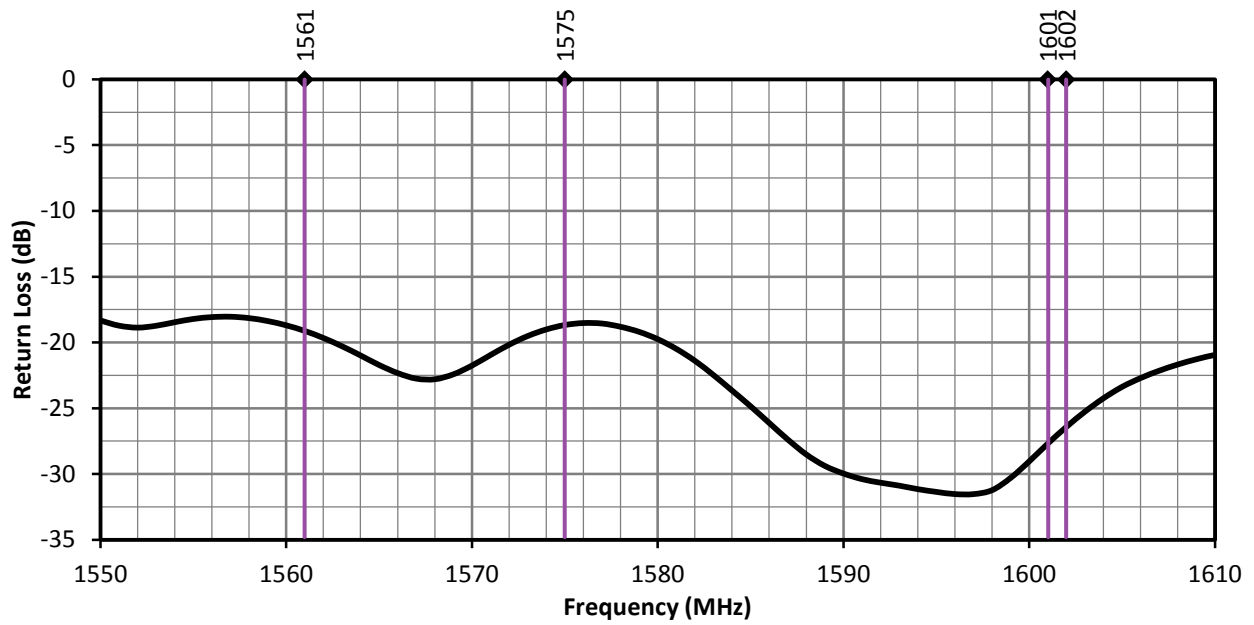


Figure 5. ANT-GNRM-L15A Series Antenna Return Loss, L1 Band

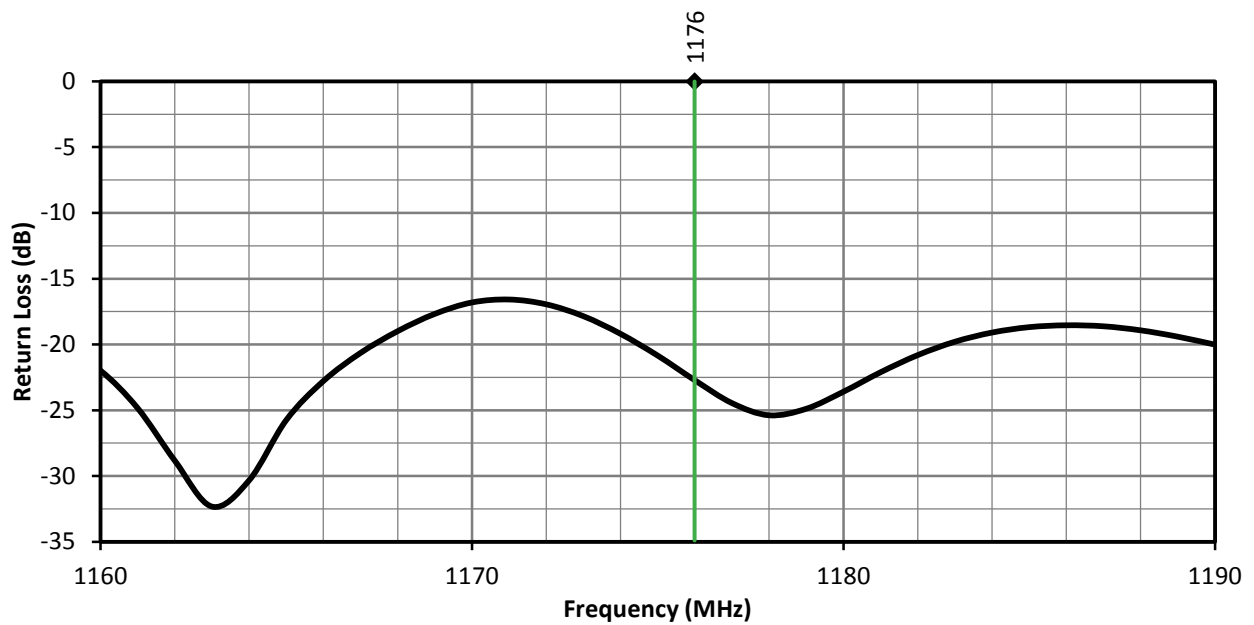


Figure 6. ANT-GNRM-L15A Series Antenna Return Loss, L5 Band

## PEAK GAIN

The peak gain across the antenna bandwidth is shown in Figure 7 (L1 band) and Figure 8 (L5 Band). Peak gain represents the maximum antenna input power concentration across 3-dimensional space, and therefore peak performance at a given frequency, but does not consider any directionality in the gain pattern.

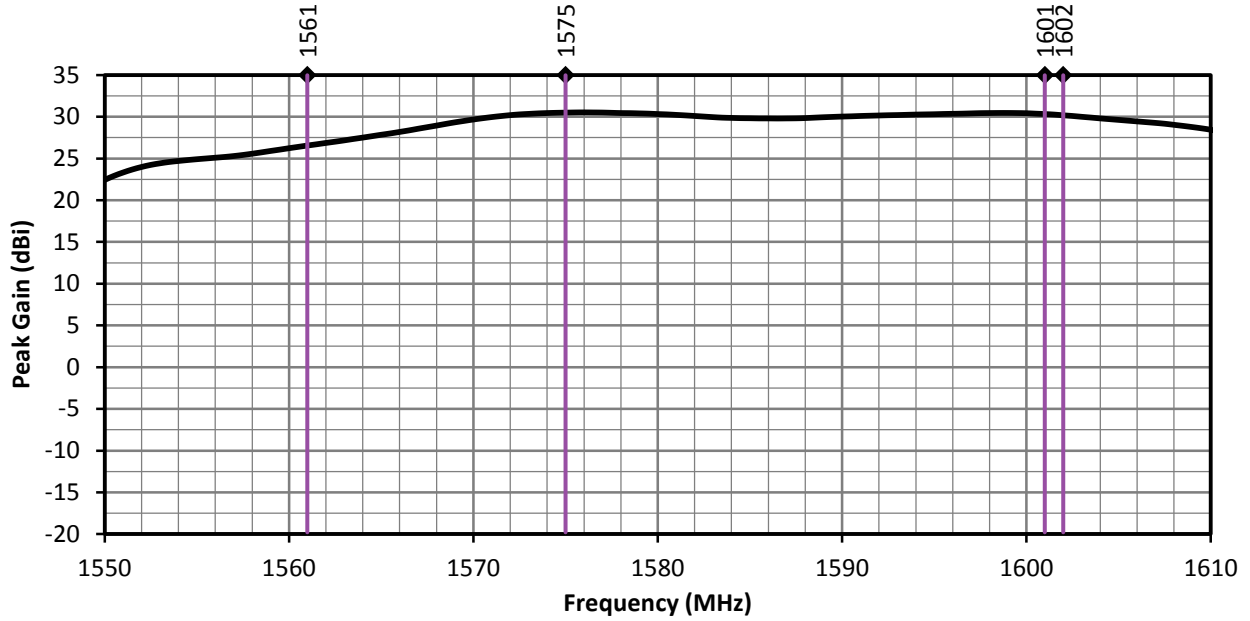


Figure 7. ANT-GNRM-L15A Series Antenna Peak Gain, L1 Band

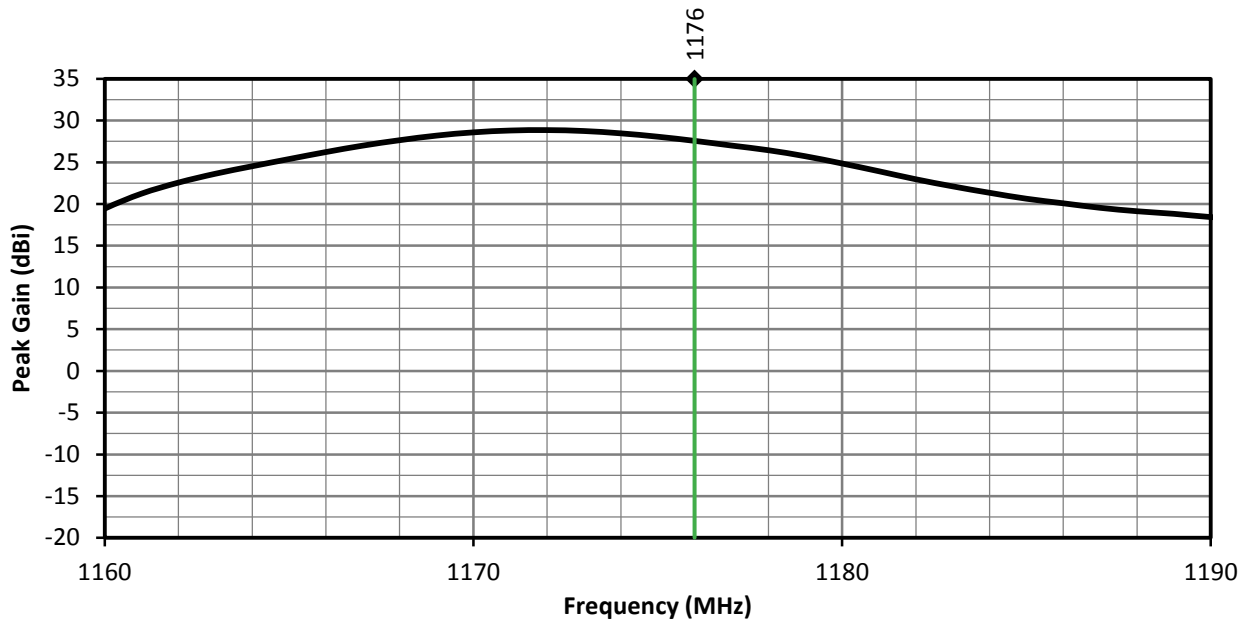


Figure 8. ANT-GNRM-L15A Series Antenna Peak Gain, L5 Band

## AXIAL RATIO

Axial ratio provides a measure of the quality of circular polarization of an antenna, the lower the value (in dB), the better the circular polarization. A circularly polarized antenna field comprises two orthogonal E-field components. These fields are ideally of equal amplitude, resulting in an axial ratio equal to unity (0 dB). In practice, no antenna is perfectly circular in polarization, the polarization is elliptical as one field has larger magnitude. As the axial ratio increases the antenna gain degrades away from the main beam orthogonal to the antenna surface. The axial ratio for the ANT-GNRM-L15A antenna is shown in Figure 9 (L1 band) and Figure 10 (L5 Band).

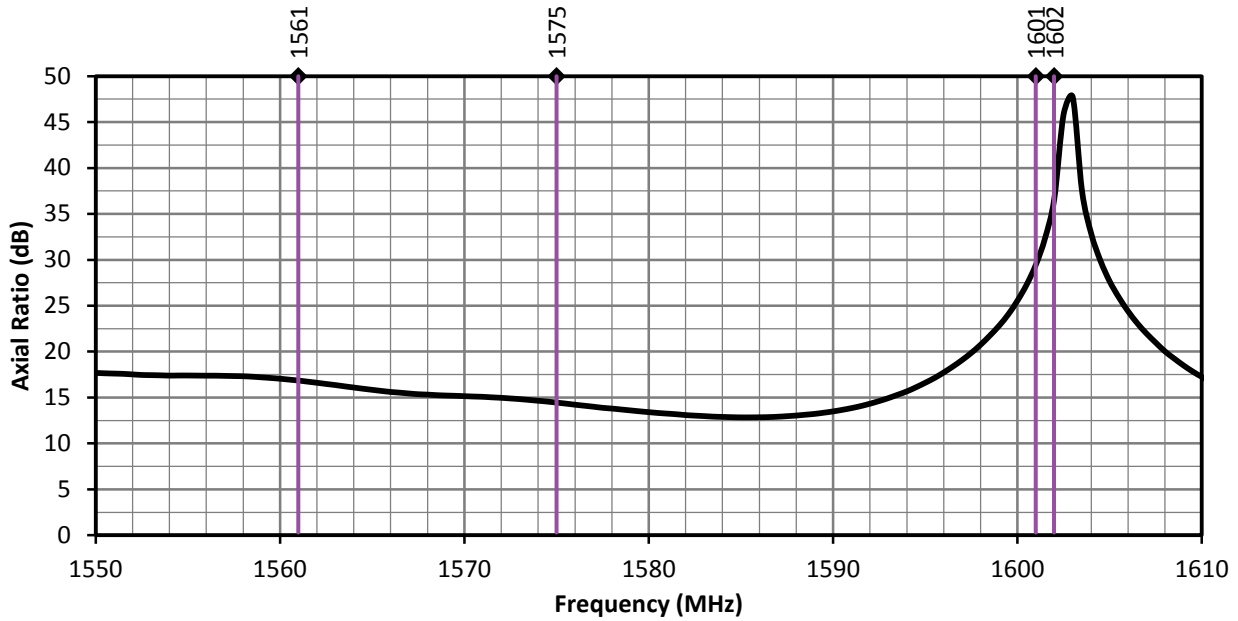


Figure 9. ANT-GNRM-L15A Series Antenna Axial Ratio, L1 Band


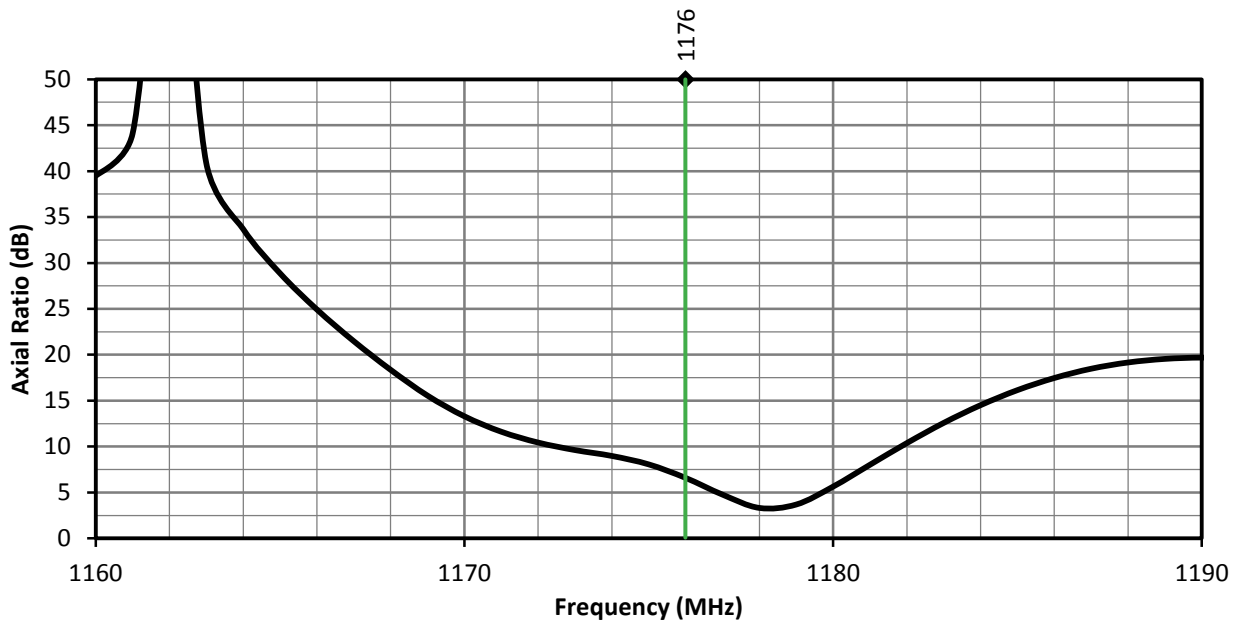



Figure 10. ANT-GNRM-L15A Series Antenna Axial Ratio, L5 Band

## RADIATION PATTERNS


Radiation patterns provide information about the directionality and 3-dimensional gain performance of the antenna by plotting gain at specific frequencies in three orthogonal planes. Antenna radiation patterns are shown in Figure 11 using polar plots covering 360 degrees. The antenna graphic at the top of the page provides reference to the plane of the column of plots below it. Note: when viewed with typical PDF viewing software, zooming into radiation patterns is possible to reveal fine detail.

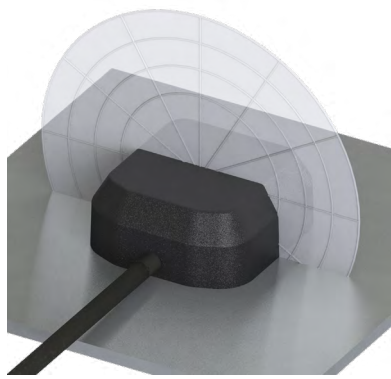

XZ-Plane Gain

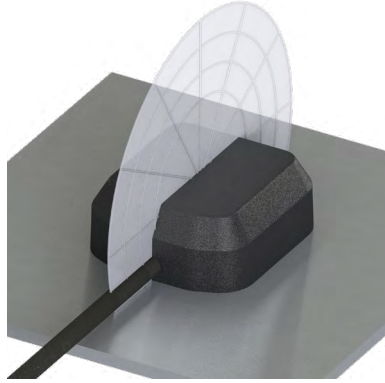


YZ-Plane Gain

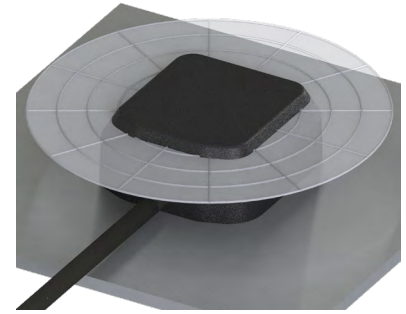


XY-Plane Gain


### 1164 MHz to 1189 MHz (1176 MHz)

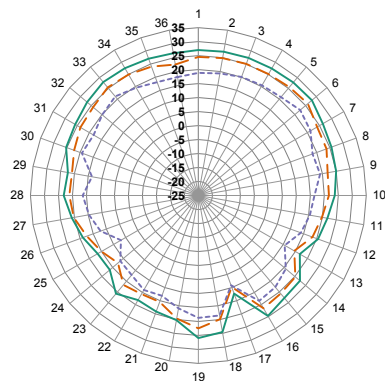

XZ-Plane Gain

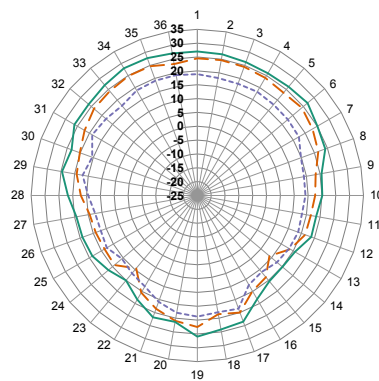


YZ-Plane Gain

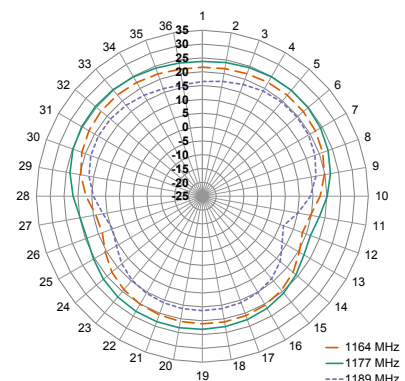


XY-Plane Gain

— 1164 MHz  
— 1177 MHz  
- - 1189 MHz


### 1559 MHz to 1563 MHz (1561 MHz)

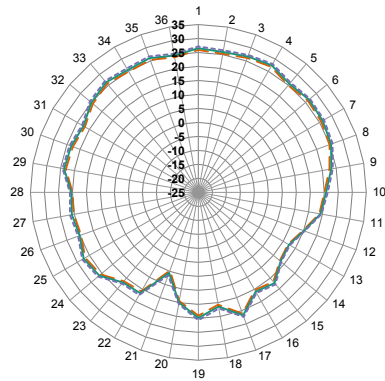

XZ-Plane Gain

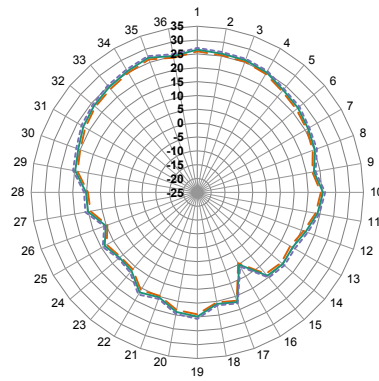

YZ-Plane Gain

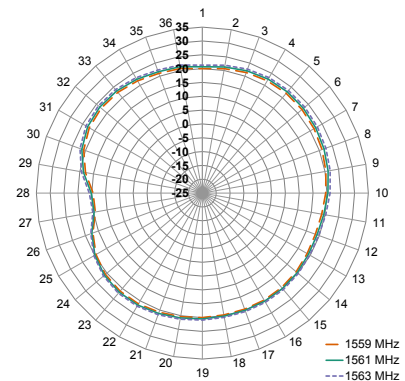


XY-Plane Gain

— 1559 MHz  
— 1561 MHz  
- - 1563 MHz



## 1559 MHz to 1592 MHz (1575 MHz)

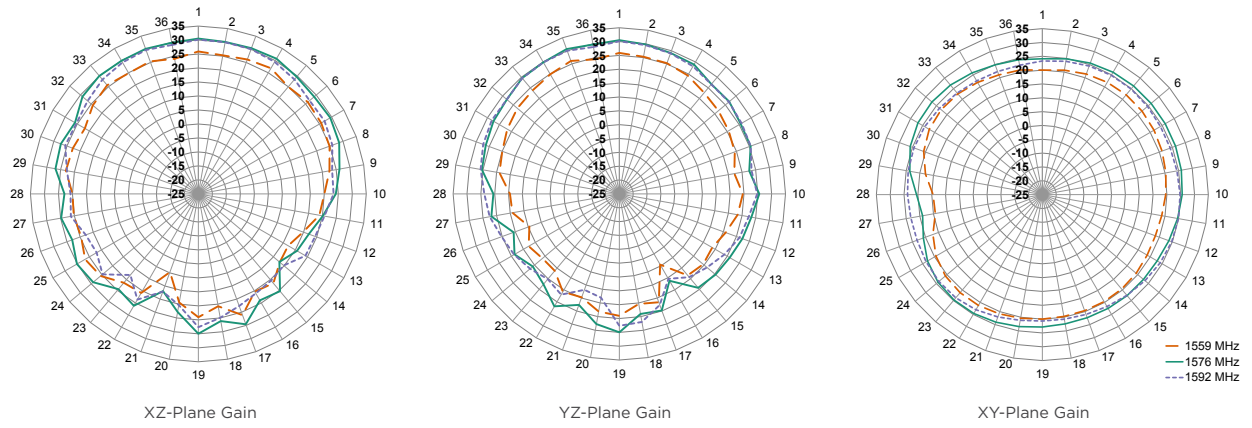

## 1598 MHz to 1606 MHz (1601 MHz)

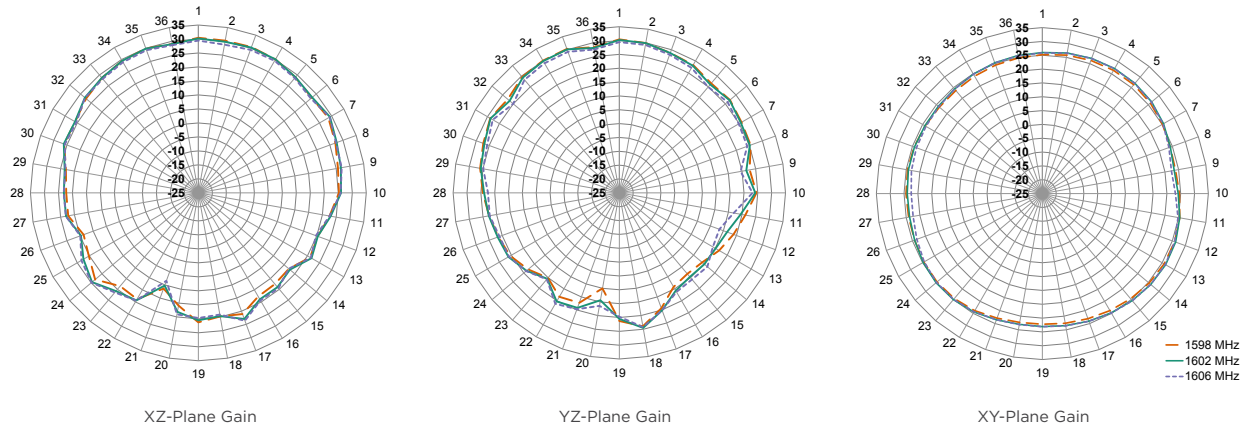


Figure 11. ANT-GNRM-L15A Series Antenna Radiation Patterns

---

## TE TECHNICAL SUPPORT CENTER

|                   |                       |
|-------------------|-----------------------|
| USA:              | +1 (800) 522-6752     |
| Canada:           | +1 (905) 475-6222     |
| Mexico:           | +52 (0) 55-1106-0800  |
| Latin/S. America: | +54 (0) 11-4733-2200  |
| Germany:          | +49 (0) 6251-133-1999 |
| UK:               | +44 (0) 800-267666    |
| France:           | +33 (0) 1-3420-8686   |
| Netherlands:      | +31 (0) 73-6246-999   |
| China:            | +86 (0) 400-820-6015  |

## te.com

TE Connectivity, TE, TE connectivity (logo), Linx and Linx Technologies are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE Connectivity product is installed. Useful lifetime of the original end product may vary but is not warranted to exceed one (1) year from the original date of the end product purchase.

©2022 TE Connectivity. All Rights Reserved.

10/22 Original