



THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES AND AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN TYCO ELECTRONICS PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION.

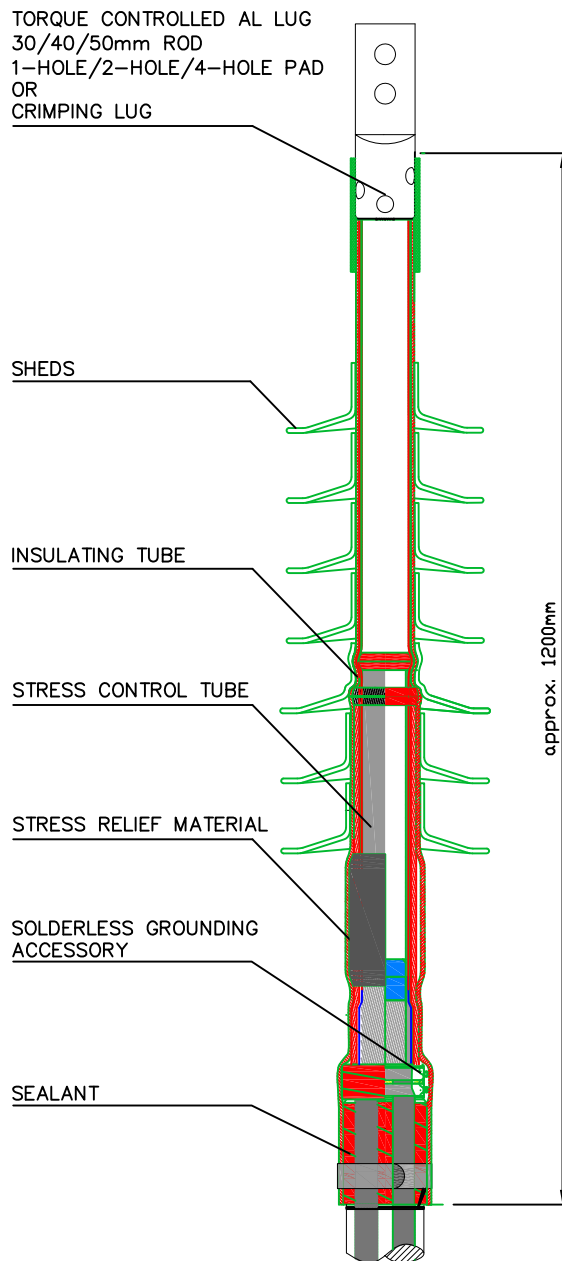

Technical Data

| | | |
|-----------------------------------|-----------------|------|
| Highest Voltage Um | kV | 72.5 |
| Lightning Impulse Voltage | kV | 350 |
| Length | mm | 1200 |
| Diameter over sheds (approx.) | mm | 220 |
| Flashover Distance | mm | 1260 |
| Creepage Distance (approx.) | mm | 2300 |
| Kit Weight approx. | kg | 7 |
| Max. Conductor Size Cu/Al approx. | mm ² | 1200 |
| Outer Diameter Cable Insulation | mm | ≤86 |
| Outer Diameter Cable Oversheath | mm | ≤110 |

OUTDOOR – TERMINATION
72.5 kV
HEAT SHRINKABLE
FOR XLPE – CABLE

OHVT-72H
Offer drawing



TYCO ELECTRONICS RAYCHEM GMBH
OTTOBRUNN GERMANY

TYCO DRAWING NO.:
EPD-204-714-A4

SHEET 1 OF 1 REV C