



# SEACON WET-CON Electrical Wet-Pluggable Connectors

WET-CON Electrical Wet-Pluggable Connectors  
Provide Reliable and Durable Connectivity  
Solutions for Subsea Environments

# SEACON

## WET-CON Electrical Wet-Pluggable Connectors

Reliable and Durable Connectivity Solutions for Subsea Environments

### KEY FEATURES

- Wet-pluggable connector
- 1 to 16 contacts, 3 connector body sizes
- Up to 20,000 psig (approx. 45,000ft/13,700m) mated
- 600 VDC with standard cable
- 19 amps max current (cable dependant)
- Typical uses: Remotely Operated Vehicles (ROV) equipment (lights, cameras, thrusters), oceanographic instruments, diver equipment, defense



TE Connectivity (TE)'s SEACON WET-CON connector series was developed to provide low cost yet reliable rubber molded connectors that allow the user to make and break connections both on the surface and underwater.

Bulkhead connectors are available in a brass or stainless steel material.

### APPLICATION

- Diver Communications
- Cameras & Lights
- ROV's
- Recreational Submersibles
- Towed-Array Cable Systems
- Current Meters
- Food Processing Equipment

## WET-CON Electrical Wet-Pluggable Connectors



### SPECIFICATIONS

- **Open Face Pressure - Bulkheads:** Up to 1,000 psi (2,300 ft).
- **Mated Pressure - Bulkheads:** Up to 10,000 psi (23,000 ft).
- **Mated Pressure - In-Lines:** Up to 20,000 psi (46,000 ft).
- **Voltage Rating:** 600 VDC (with standard cable).
- **Current Rating:** Up to 19 amps per contact.
- **Contact Resistance:** <0.01 ohms.
- **Insulation Resistance:** >500 megohms after wet mating.
- **Mating Cycles:** >500 wet matings.
- **Operating Temperature:** 25° to 140°F (-4° to 60°C).

### MATERIALS

- **Bulkhead Body:**
  - **Standard:** DGS 1043 or CA630 per QQ-C-465.
  - **Optional:** 316 Stainless Steel (no cost option), 6061-T6 Aluminum, Hard Anodized available on request.
- **Connector Body:**
  - **Standard:** Neoprene per B/A X5727.
  - **Optional:** Hypalon per B/A X6830 or PEEK (Polyetheretherketone).
- **Contacts:** Copper Alloy Gold Plated per ASTM B488.
- **Guide Pins:** 304 Stainless Steel.
- **O-Ring:** Nitrile (formerly known as Buna N).
- **In-Line Cable:** #18 AWG SO as standard.
  - #14 or #16 AWG SO Cable available dependent on connector size.
- **Bulkhead Pigtails:** TFE insulated wire type E hook-up wire, 18 inches.

### SPECIAL ASSEMBLIES

TE provides complete under-water and environmental electrical connector/cable systems, including Research and Development, Engineering, Manufacturing, Quality Control and Pressure Testing.

As well as supplying our standard 'off-the-shelf' items, we have the capability to design and manufacture SPECIAL CUSTOMIZED CONNECTORS AND CABLE ASSEMBLIES to suit your individual needs.

TE also prides itself with the ability to perform stringent quality conformance testing procedures which are in accordance with the MIL-SPEC programs.

### NOTES:

WET-CON connectors are intended to mate with WET-CON connectors only. Although the WET-CON and ALL-WET connectors look similar, the numbering pattern and color codes are not the same.


We recommend, as general practice, to verify color code and pin location before installation.

- Locking sleeves are not standard and must be ordered separately. Available in Polyacetal.
- Bulkhead nut/washer is not standard and must be ordered separately. Available in Brass or 316 Stainless Steel.
- In-line cable and hook up wire is 18 inch standard length. Longer length to be specified when ordering.
- In-line cable is available in #14 or #16 AWG SO. Cable other than SO will be terminated and over-molded to a bulkhead connector.




### WET-CON Bulkhead Connectors

#### Ordering Information

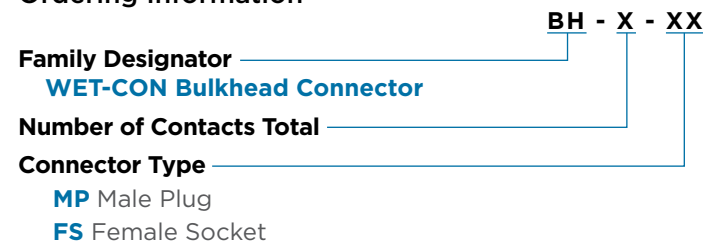


### WET-CON In-Line Connectors

#### Ordering Information

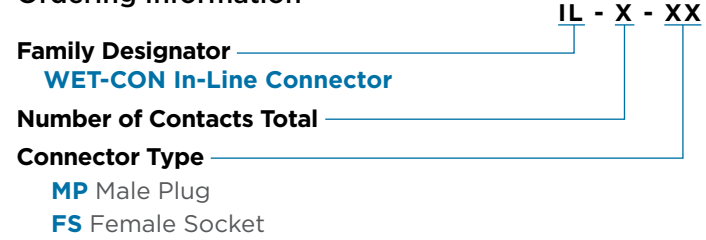

### WET-CON Locking Sleeves

#### Ordering Information

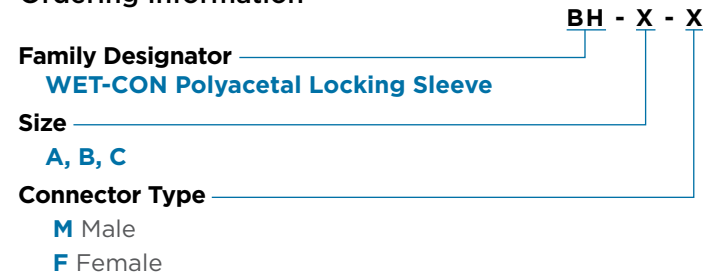


**NOTES:**

- Locking Sleeves are available for WET-CON connectors as an option.
- Size A fits 2, 3, 4 and 5 contact patterns.
- Size B fits 6, 8 and 10 contact patterns.
- Size C fits 12 and 16 contact patterns.

### WET-CON Dummy Connectors

#### Ordering Information

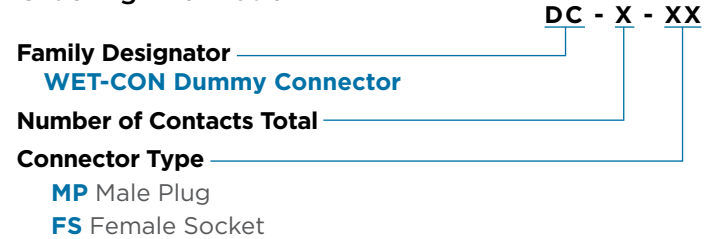

**NOTES:**

- Dummy connectors are available parts in the WET-CON Series.



### Ampacity Chart for Standard Parts (18 AWG SO cable)

Part Description Number of Contacts	Ampacity
IL-BH-2	10 amps
IL-BH-3	7 amps
IL-BH-4	5.6 amps
IL-BH-5	5.6 amps
IL-BH-6	5.6 amps
IL-BH-8	4.9 amps
IL-BH-10	3.5 amps
IL-BH-12	3.5 amps
IL-BH-16	3.5 amps

**NOTES:**

- Higher ampacities are available.

### Standard In-Line Wiring Color Code (SO Cable)

Contact #	Colour
1	Black
2	White
3	Red*
4	Green
5	Orange
6	Blue
7	White/Black
8	Red/Black
9	Green/Black
10	Orange/Black
11	Blue/Black
12	Black/White
13	Red/White
14	Green/White
15	Blue/White
16	Black/Red

**NOTES:**

- \* For 3 contact configurations wiring color code is GREEN.



**CAUTION:**

- WET-CON connectors are intended to mate with WET-CON connectors only. Although the WET-CON and ALL-WET connectors look similar, the numbering pattern and color codes are not the same. We recommend, as general practice, to verify color code and pin location before installation.





## BH-MP (2 - 10 Contacts)

Bulkhead Connector Male Plug

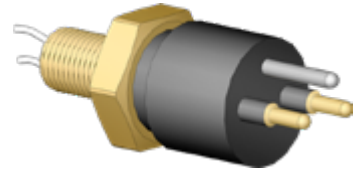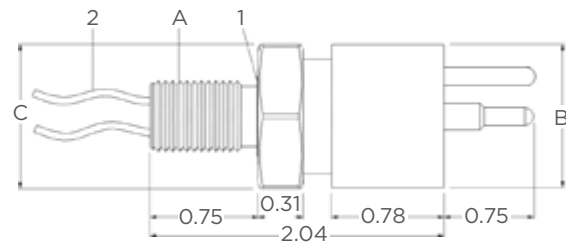

## BH-FS (2 - 10 Contacts)

Bulkhead Connector Female Socket

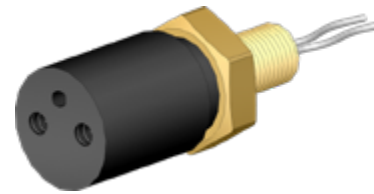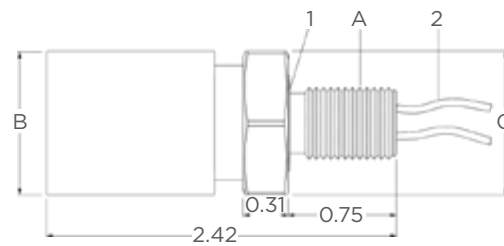

Contact Size	A Thread	1 O-Ring	B Ø (In)	C Hex Flats (In)	2 Hook-Up Wire	Part Number
2	7/16-20 UNF-2A	2-014	1.00	0.75	18 AWG	BH-2-MP/FS
3	7/16-20 UNF-2A	2-014	1.00	0.75	18 AWG	BH-3-MP/FS
4	7/16-20 UNF-2A	2-014	1.00	0.75	18 AWG	BH-4-MP/FS
5	7/16-20 UNF-2A	2-014	1.00	0.75	18 AWG	BH-5-MP/FS
6	5/8-18 UNF-2A	2-017	1.25	1.00	18 AWG	BH-6-MP/FS
8	5/8-18 UNF-2A	2-017	1.25	1.00	18 AWG	BH-8-MP/MPX*/FS/FSX*
10	5/8-18 UNF-2A	2-017	1.25	1.00	18 AWG	BH-10-MP/FS


**Notes:**

- Bulkhead mounting torque: 7/16 thread = 50 inch pounds. 5/8 thread = 85 inch pounds.
- Nut and Washer: Optional.
- Dummy Connector: Optional.
- Dummy Shorting Plug: Optional.
- O-Ring: Nitrile (formerly known as Buna N).
- Bulkhead leads are tagged with pin number.
- Connectors must be lubricated prior to mating.
- Torque values referenced in this literature assume installation into dry metal threads. For other applications, please contact TE for recommendations.
- Connectors are designed for installation on one atmosphere vessels. Contact TE for recommendations if using compensated vessels.
- For contact configurations please refer to page 13.
- \* No guide pin. MPX/FSX connectors are recommended for new applications.




## IL-MP (2 - 10 Contacts)

In-Line Connector Male Plug

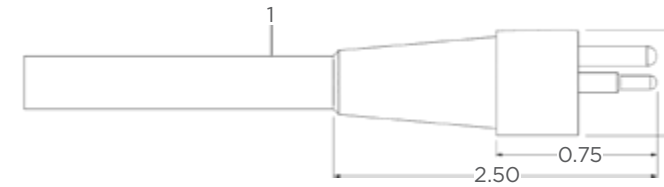

## IL-FS (2 - 10 Contacts)

In-Line Connector Female Socket

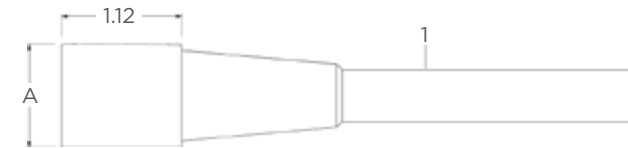

Contact Size	A Ø (In)	1 Cable	Part Number
2	1.00	18/2 SO	IL-2-MP/FS
3	1.00	18/3 SO	IL-3-MP/FS
4	1.00	18/4 SO	IL-4-MP/FS
5	1.00	18/5 SO	IL-5-MP/FS
6	1.25	18/6 SO	IL-6-MP/FS
8	1.25	18/8 SO	IL-8-MP/MPX*/FS/FSX*
10	1.25	18/10 SO	IL-10-MP/FS



**Notes:**

- Locking Sleeve: Optional (see page 12).
- Dummy Connector: Optional.
- Dummy Shorting Plug: Optional.
- Connectors must be lubricated prior to mating.
- \* No guide pin. MPX/FSX connectors are recommended for new applications.





## BH-MP (12 - 16 Contacts)

Bulkhead Connector Male Plug

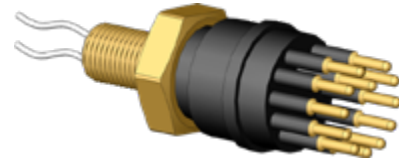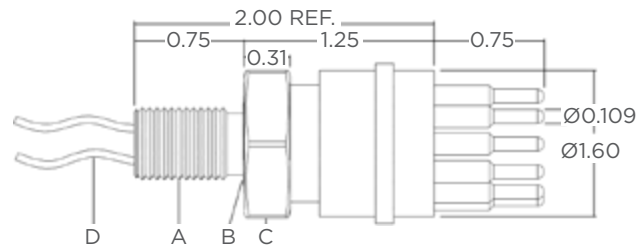

## BH-FS (12 - 16 Contacts)

Bulkhead Connector Female Socket

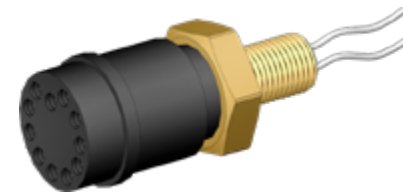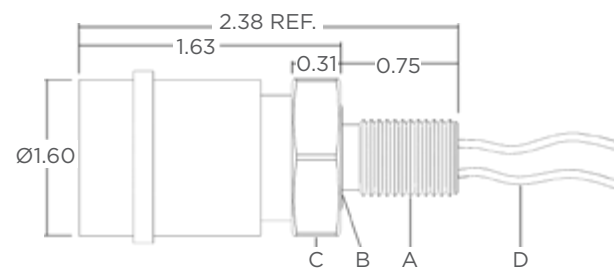

Contact Size	A Thread	B O-Ring	C Hex Flats (In)	D Hook-Up Wire	Part Number
12	5/8-18 UNF-2A	2-017	1.00	18 AWG	BH-12-MP/FS
16	3/4-16 UNF-2A	2-118	1.25	18 AWG	BH-16-MP/FS


**Notes:**

- Bulkhead Mounting Torque: 5/8 Thread = 85 inch pounds. 3/4 Thread = 85 inch pounds.
- Locking Sleeve: Optional (see page 12).
- Nut and Washer: Optional.
- Dummy Connector: Optional.
- Dummy Shorting Plug: Optional.
- O-Ring: Nitrile (formerly known as Buna N).
- Bulkhead leads are tagged with pin number.
- Connectors must be lubricated before mating.
- Torque values referenced in this literature assume installation into dry metal threads. For other applications, please contact TE for recommendations.
- Connectors are designed for installation on one atmosphere vessels. Contact TE for recommendations if using compensated vessels.
- For contact configurations please refer to page 13.




## IL-MP (12 - 16 Contacts)

In-Line Connector Male Plug

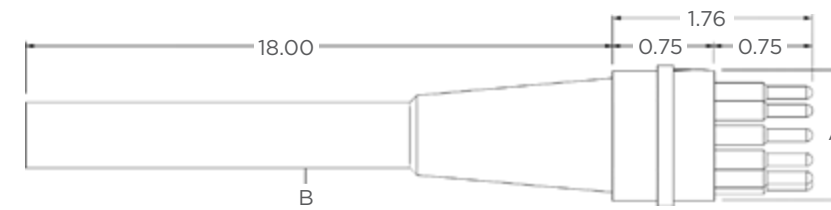

## IL-FS (12 - 16 Contacts)

In-Line Connector Female Socket

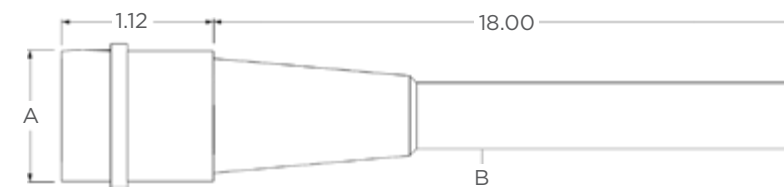

Contact Size	A Ø (In)	B Cable	Part Number
12	1.60	18/12 SO	IL-12-MP/FS
16	1.60	18/16 SO	IL-16-MP/FS


**Notes:**

- IL-16-MP WOC is not available, substitute with BH-16-MP.
- Locking Sleeve: Optional (see page 12).
- Dummy Connector: Optional.
- Connectors must be lubricated prior to mating.
- Shorting plugs are available should you require the ability of looping together 'like' circuits for testing purposes within the dummy. Pin to pin shorting details need to be supplied at time of order placement.



## LPBH-MP

### Low Profile Bulkhead Connector Male Plug

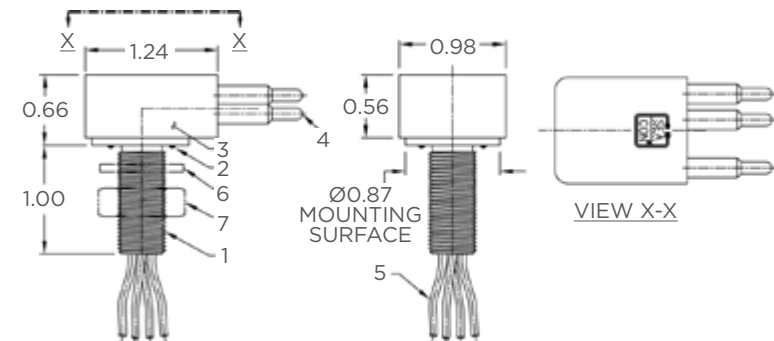


**Notes:**

- 1 **LPBH-BC SHELL:** CA 630 and Copper Contacts, Gold Plated.
- 2 **O-RING:** 2-014 Nitrile (formerly known as Buna N).
- 3 **LPBH-3/4-MP:** Neoprene Molding per B/A X-5727.
- 4 **PIN:** Copper Alloy and Gold Plated per MIL-G-45204.
- 5 **#18 AWG TFE insulated wire. WIRE:** 12 inches long.
- 6 **WASHER (OPTIONAL):** Brass.
- 7 **HEX NUT (OPTIONAL):** Brass.

- **MOUNTING TORQUE:** 40 inch lbs.
- **PRESSURE RATING:** 20,000 psi mated.

## LPBH-FS

### Low Profile Bulkhead Connector Female Socket

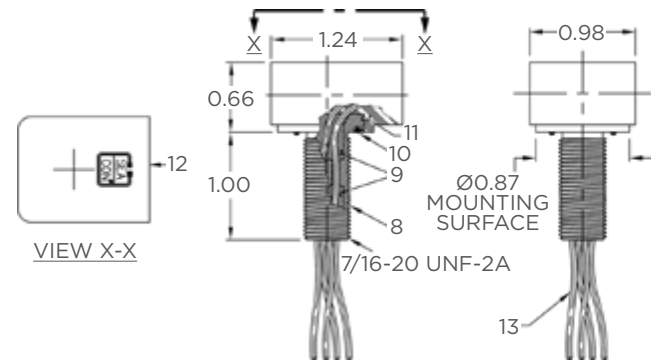

**Notes:**


- 8 **LPBH-BC SHELL:** CA 630 and Copper Contacts, Gold Plated.
- 9 **POTTING:** White Epoxy per B/A 6373.
- 10 **O-RING:** 2-014 Nitrile (formerly known as Buna N).
- 11 **MOLDED BODY:** Neoprene Molding per B/A X-5727.
- 12 **SOCKET:** Copper Alloy 360 per QQ-B-626 or 61A; Gold Plated per MIL-G-45204, Type II, Grade C, Class I, with Flash Nickel Undercoat.
- 13 **#18 AWG TFE insulated wire. WIRE:** 12 inches long.

- **MOUNTING TORQUE:** 40 inch lbs.
- **PRESSURE RATING:** 20,000 psi mated.



## LPIL-MP

### Low Profile In-Line Connector Male Plug

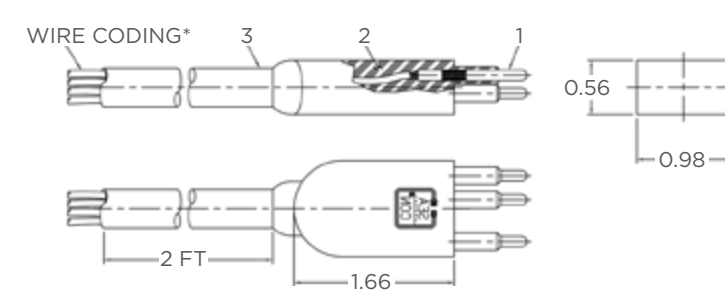


**Notes:**

- 1 **PIN:** CA 630 & Gold Plated per ASTM-B488-95.
- 2 **RUBBER MOLD:** Neoprene Mold per B/A X-5727.
- 3 **CABLE:** 16/3 SOW or 16/4 SOW.

- **PRESSURE RATING:** 20,000 psi mated.

## LPIL-FS

### Low Profile In-Line Connector Female Socket

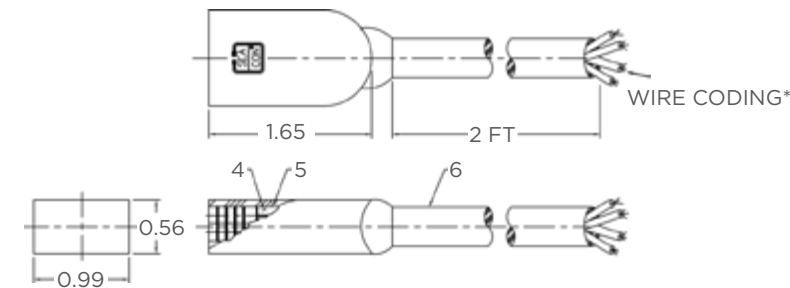

**Notes:**

- 4 **SOCKET:** CA 630 per MSBA-019.
- 5 **RUBBER MOLD:** Neoprene per MSNBA-027.
- 6 **CABLE:** 16/3 SOW or 16/4 SOW.

- **PRESSURE RATING:** 20,000 psi mated.

### Wire Color Code


Contact Number	Colour
1	Black
2	White
3	Red
4	Green





## DLS-F

Locking Sleeve Female

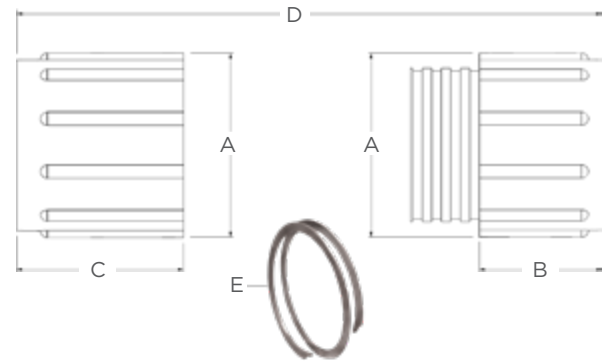

## DLS-M

Male Locking Sleeve




Locking Sleeve	A Ø (In)	B Length (In)	C Length (In)	D Mated Length (In)	E Spirolox*
DLSA-M	1.40	0.90	-	2.19	RR 100
DLSA-F	1.40	-	1.29	2.19	RR 100
DLSB-M	1.62	0.94	-	2.26	RR 125
DLSB-F	1.62	-	1.32	2.26	RR 125
DLSC-M	2.37	0.78	-	1.95	RR 187
DLSC-F	2.38	-	1.17	1.95	RR 187

- Notes:**
- \* SPIROLOX RINGS: Stainless Steel.
  - Size A fits 2, 3, 4 and 5 contact patterns.
  - Size B fits 6, 8 and 10 contact patterns.
  - Size C fits 12 and 16 contact patterns.


## BH-MP/FS

Through Bore Option

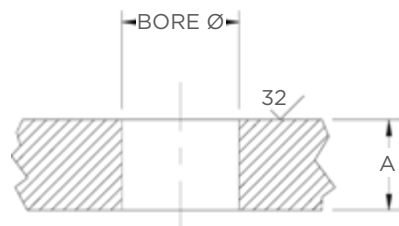

## BH-MP/FS

Threaded Mounting Option

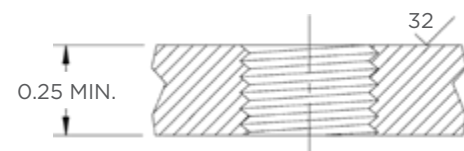


Connector	Thread	Bore Ø (In)	Mounting Torque (In/lbs)	Spot Face Ø (In)	A Max. (In)
BH-MP/FS (2/3/4/5)	7/16-20 UNF-2B	0.437 +0.015 -0.000	50	1.00	0.44
BH-MP/FS (6/8/10/12)	5/8-18 UNF-2B	0.625 +0.015 -0.000	85	1.25	0.44
BH-MP/FS (16)	3/4-16 UNF-2B	0.750 +0.015 -0.000	85	1.50	0.44



## WET-CON Series Bulkhead/In-Line Contact Configurations

Male Face View Only - Not to Scale\*

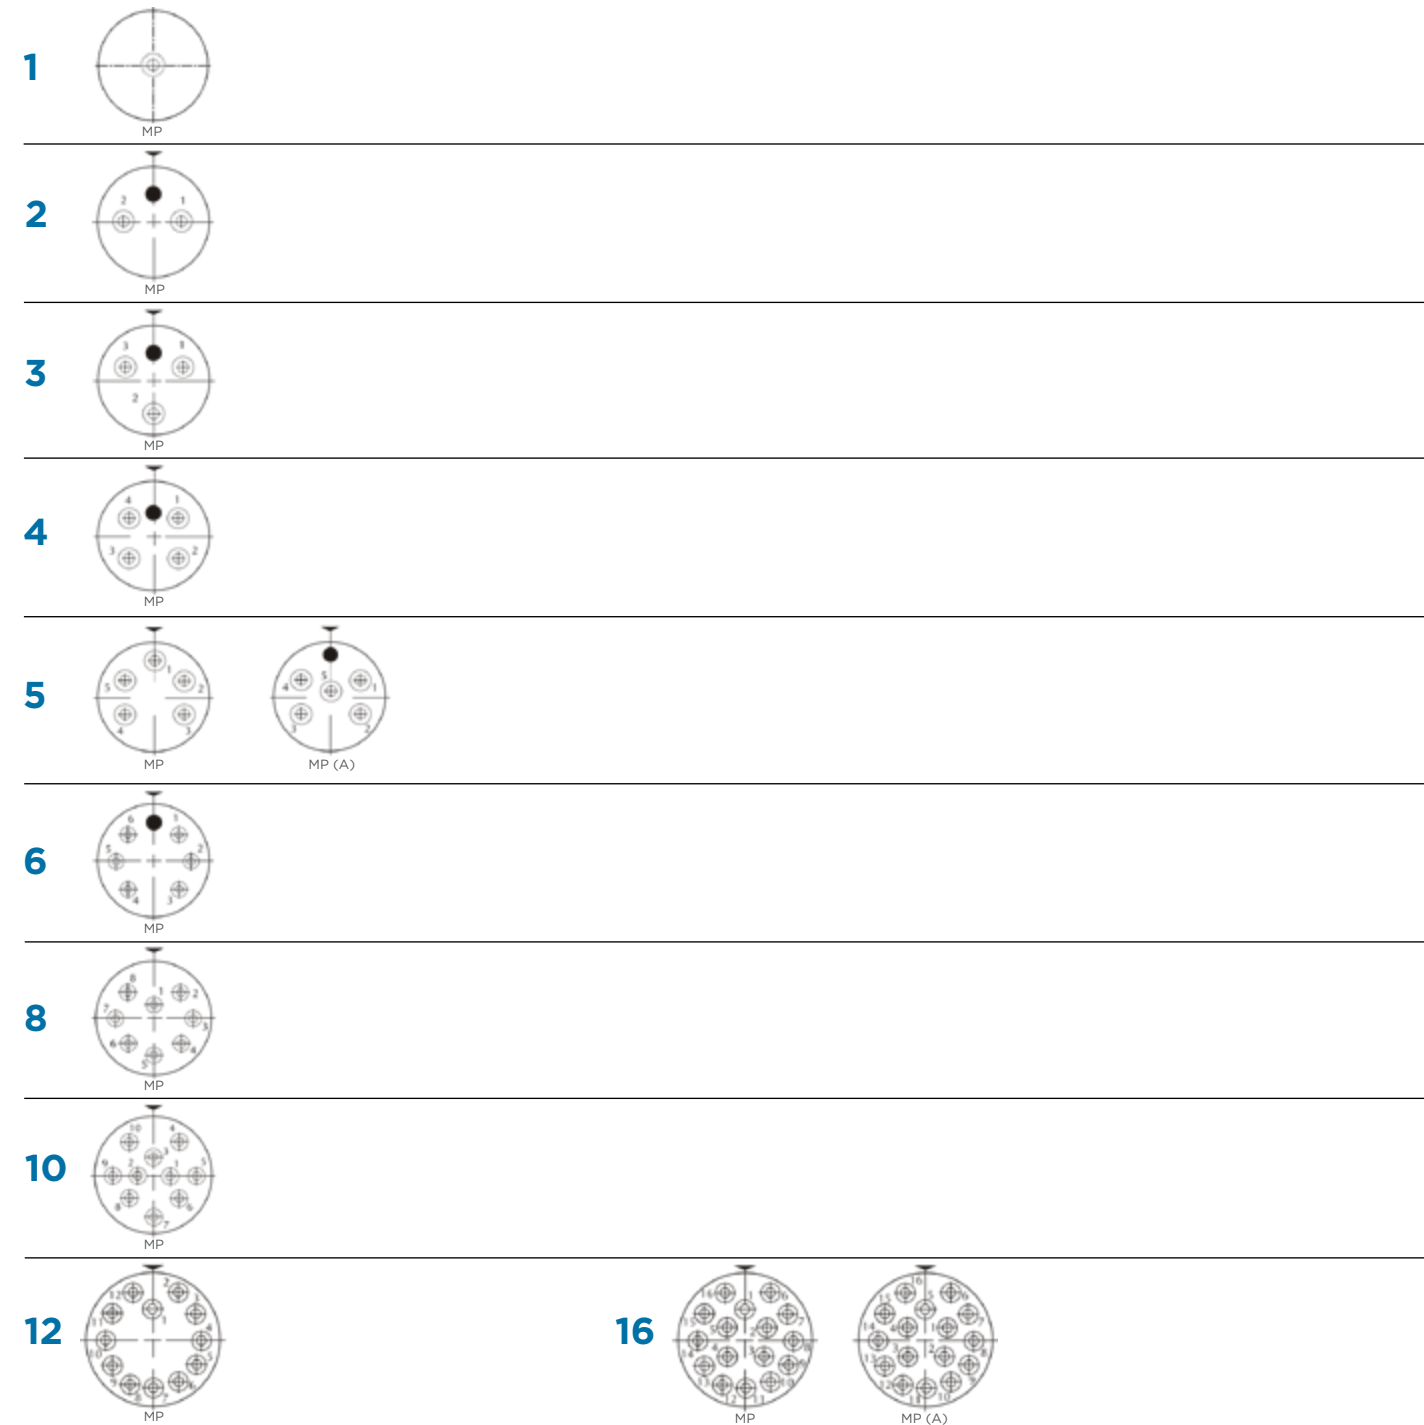

- Notes:**
- \* For female face view contact configurations please contact TE.

Empower Engineers to Solve Problems, Moving the World Forward.

AMP | AGASTAT | CII | DEUTSCH | DRI | HARTMAN | KILOVAC  
MICRODOT | NANONICS | POLAMCO | Raychem | Rochester | SEACON

**US Inside Sales:**

Phone: +1 619-562-7071

Email: [elcajonsales@te.com](mailto:elcajonsales@te.com)

**UK Inside Sales:**

Phone: +44 (0) 1493-652733

Email: [gyarmouthsales@te.com](mailto:gyarmouthsales@te.com)

**Brazil Inside Sales:**

Phone: +55 11 2103-6262

Email: [adalberto.bromberg@te.com](mailto:adalberto.bromberg@te.com)

Phone: +1 346-257-6600

Email: [katysales@te.com](mailto:katysales@te.com)

## CONNECT WITH US

We make it easy to connect with our experts and are ready to provide all the support you need. Visit [te.com/support](https://te.com/support) to chat with a Product Information Specialist.

## QUALITY STARTS WITH THE RIGHT APPLICATION TOOLING

Creating a quality crimp connection is essential to delivering high performance and reliability in extreme environments. From low to high volume wire processing, TE has you covered with a full range of application tooling and a global field service team.

- [View all application tooling](#)
- [Connect with our experts to find the right tool for your application](#)

---

AMP, AGASTAT, CII, DEUTSCH, DRI, HARTMAN, KILOVAC, MICRODOT, NANONICS, POLAMCO, Raychem, Rochester, SEACON, TE, TE Connectivity, and TE connectivity (logo) are trademarks owned or licensed by TE Connectivity. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2022 TE Connectivity All Rights Reserved.

2359244-1 07/22