
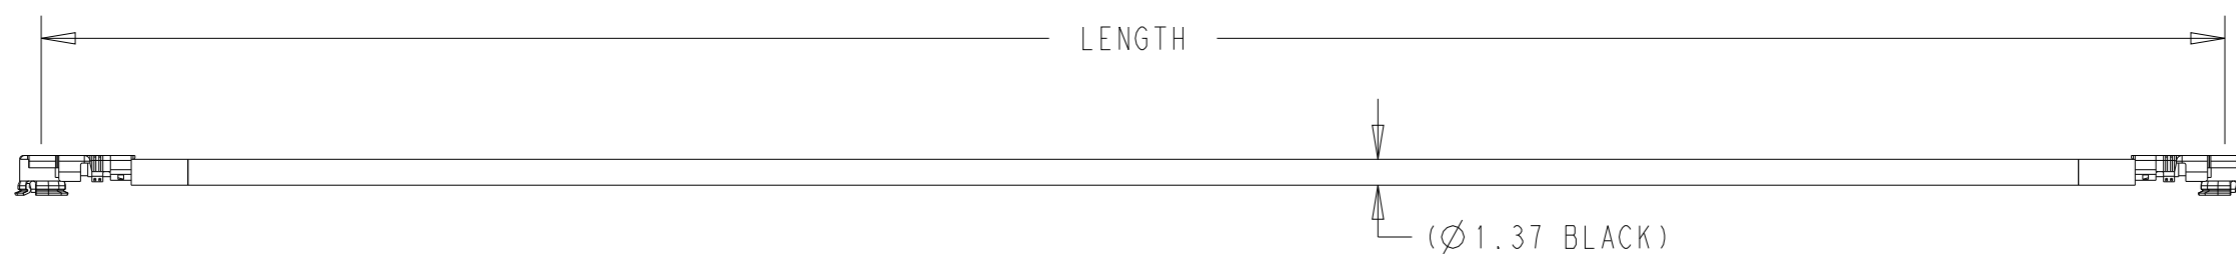


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	GTP ECN-22-147784	11APR2022	JZ	WKH

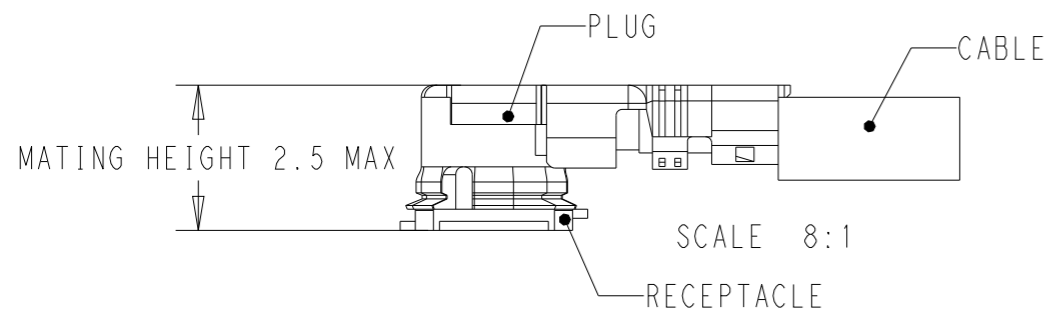

- NOTES:
- PARTS AND PROCESSES ROHS COMPLIANT PER TE CONNECTIVITY STANDARD TEC-138-702.
 - PRODUCT RATING:
CHARACTERISTIC IMPEDANCE: 50 OHMS Normal
FREQUENCY RANGE: DC TO 9GHz
 - CABLE ASSEMBLY TO BE 100% OPEN & SHORT TESTED
 - UMCC GEN1 CAN MATE WITH I-PEX MHF1 SERIES AND HIROSE U.FL SERIES

1-2410329-0	500±5
2410329-9	450±5
2410329-8	400±5
2410329-7	350±5
2410329-6	300±5
2410329-5	250±5
2410329-4	200±3
2410329-3	150±3
2410329-2	100±3
2410329-1	50±3
P/N	LENGTH

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	JZ	16MAR2022						
		CHK	WKH	16MAR2022						
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:			NAME RF CA,UMCC GEN1-GEN1,1.37MM CABLE					
		0 PLC ±-			PRODUCT SPEC					
		1 PLC ±-			108-2231					
MATERIAL		2 PLC ±-			APPLICATION SPEC					
		3 PLC ±-			-					
		4 PLC ±-			SIZE					
		ANGLES ±-			A3					
		FINISH			CAGE CODE					
		-			00779					
		-			DRAWING NO					
		-			C-2410329					
		WEIGHT			RESTRICTED TO					
		-			-					
CUSTOMER DRAWING					SCALE	2:1	SHEET	1 OF 1	REV	A