



# TE SENSOR SOLUTIONS



# TE SENSOR SOLUTIONS

TE Connectivity (TE) is a global technology leader, providing connectivity and sensor solutions essential in today's increasingly connected world. TE is one of the largest sensor companies in the world. Our sensors are vital to the next generation of data-driven technology. We offer an unmatched portfolio of solutions for applications across a wide range of industries, including Automotive, Industrial, Medical, Appliance, Aerospace & Defense, and Industrial and Commercial Transportation. Our technologies enable measurement capabilities such as pressure, temperature, position, vibration, humidity and fluid property, to name a few. Our engineers help transform concepts into creations — redefining what's possible using intelligent, efficient and high performing TE products and solutions proven in harsh environments.



## MARKETS SERVED



**Aerospace & Defense**  
PAGE 4



**Appliances**  
PAGE 5



**Automation & Control**  
PAGE 6



**Automotive**  
PAGE 7



**Consumer**  
PAGE 8



**Industrial**  
PAGE 9



**Industrial & Commercial Transportation**  
PAGE 10



**Intelligent Buildings**  
PAGE 11



**Medical**  
PAGE 12



**Oil & Gas**  
PAGE 13



**Test & Measurement**  
PAGE 14

## SENSOR TECHNOLOGIES



**Automotive Sensors**  
PAGE 16



**Digital Component Sensors**  
PAGE 20



**Flow Sensors**  
PAGE 22



**Fluid Property Sensors**  
PAGE 24



**Force Sensors**  
PAGE 28




**Humidity Sensors**  
PAGE 34



**Liquid Level Sensors**  
PAGE 38



**Photo Optic Sensors**  
PAGE 40



**Piezo Film Sensors**  
PAGE 42



**Position Sensors**  
PAGE 44



**Pressure Sensors**  
PAGE 58



**Rate and Inertial Sensors**  
PAGE 68



**Scanners and Systems**  
PAGE 70



**Temperature Sensors**  
PAGE 72



**Torque Sensors**  
PAGE 80



**Ultrasonic Sensors**  
PAGE 82



**Vibration Sensors**  
PAGE 84



**Water Level Sensors**  
PAGE 92

# AEROSPACE & DEFENSE



When quality and reliability are paramount, aerospace & defense companies rely on our technology to help solve mission critical challenges. Our core competencies in high reliability sensors for harsh environments such as temperature extremes, RFI, EMI, vibration, and lightning strikes make us a leading choice in sensor technology. Our design engineering capabilities, as well as AS9100 certified sensor manufacturing facilities in North America, Europe and Asia Pacific, support Tier 1, 2 and 3 providers.

Regional design and manufacturing capabilities enable us to provide ITAR-free designs and supply products closer to our customers. We work closely with the customer to provide stable, reliable and cost effective solutions that meet the extensive development cycles and qualifications critical to aerospace & defense.

## APPLICATION SOLUTIONS

### Cockpit Controls

- Automatic autopilot disconnect force sensors
- Motorized potentiometers for position feedback
- Brake pedal position sensors
- Rotary panel switches and sensors
- Force sensors for flight data recording of pilot inputs
- Throttle quadrant position sensors
- Flap and spoiler lever position sensors

### Flight Controls & Actuation

- High lift load sensors
- THSA secondary load path engagement sensors
- Aileron LVDT position sensors
- Resolvers for flap and slat position monitoring
- Force and position sensors for spoiler electromechanical actuation
- Brake actuator force sensors for rotorcraft

### Landing Gear & Brakes

- Brake torque sensors
- Pressure sensors for nose wheel steering feedback
- Resolvers for steering position
- Load on wheels force sensors
- Center of gravity force sensors

### Cabin, Galley & Cargo

- Cabin pressure indicator sensors
- Waste tank level sensors
- Environmental cabin control pressure sensors
- Cargo humidity sensors
- Galley temperature sensors
- Air quality temperature sensors
- Oxygen generation pressure transducers

### Launch & Space

- Payload monitoring vibration sensors
- Thrust vectoring LVDT position sensors
- Electrical actuator position resolvers
- Booster separation potentiometers
- Cryogenic fuel pressure transducers
- Satellite temperature sensors
- Mirror/antenna position LVDT sensors

### Engine, Turbine & APU

- Thermocouple harnesses for exhaust gas temperature
- LVDT for thrust reverser position monitoring
- Platinum 200 air temperature sensors
- Variable bleed valve LVDT position sensors
- Rotor track and balance accelerometers
- Health and Usage Monitoring Systems (HUMS) accelerometers
- Thermistor heater fuel tank level and flow

### Military (Missile, Ground Vehicle, Marine, UAV)

- Missile fin actuation
- Fuel tank level and flow sensors
- Gun stabilization and shock measurement
- Tamper detection for missiles
- Electronic safe arm and fire
- Oil pressure and temperature sensors
- Airspeed and altitude sensors

# APPLIANCES



Today's smart and green appliances are built using more efficient designs, meeting the latest regulations while saving energy, water and time. Customers rely on our sensor technologies to enable appliances to respond to human touch, sense vibration, adjust to loads, and operate more efficiently. We work to develop custom solutions that can monitor humidity and water levels, and temperature. Our products contribute to new levels of convenience and productivity in a wide range of household appliances.

## APPLICATION SOLUTIONS

### Clothes Dryer

- Humidity sensor monitors process humidity and stops the dryer when clothes are dry
- Thermopile measures clothing temperature to prevent overheating and fabric damage
- Force sensor measures payload weight at the beginning of the cycle

### Cooktop

- Temperature sensor monitors glass surface temperature for cooking control and "hot" indication lights for user safety

### Dishwasher

- Magnetoresistive (MR) sensor and magnet verifies spray arm rotation
- Temperature sensor measures water temperature and controls heating elements
- Liquid level sensor monitors water level and detergent dispenser level

### Household Oven

- Temperature probe monitors cooking temperature
- Temperature sensor monitors pyrolytic cleaning temperature and controls door latch

### Microwave Oven

- Humidity sensor monitors food moisture content during cooking
- Thermopile measures food temperature without physical contact
- Force sensor measures food weight on the turntable

### Refrigerator

- Temperature sensor monitors the freezer and refrigerator cabinets as part of the control system
- Humidity sensor monitors humidity in produce drawers and compartments
- Humidity sensor monitors ambient room humidity to help manage frost prevention and doorframe condensation

### Small Appliances

- Temperature sensor measures liquid and heating element temperatures in toaster ovens, coffee makers, and popcorn poppers
- Humidity sensor monitors relative humidity and steam production for espresso machines, and clothes steamers

### Washing Machine

- Temperature sensor measures water temperature and controls heating elements
- Pressure sensor monitors water level
- Vibration sensor detects out-of-balance conditions during spin cycle
- Proximity sensor verifies door closed and latched before start of the wash cycle
- Force sensor measures payload weight at the beginning of the wash cycle

# AUTOMATION & CONTROL



Automation & Control includes a wide range of industrial applications that span all markets, and at all levels, from the factory floor and process end users, to integrators and large scale OEM production. Industrial production is increasingly driven by greater automation, safety and energy efficiency. Our broad portfolio of products offers many options to meet custom performance, application and regulation/certification requirements.

## APPLICATION SOLUTIONS

### Pressure Sensing

- Analog and digital pressure sensing modules
- Altimeter pressure module
- Media isolated pressure sensing modules
- Heavy industrial pressure transducers
- Miniature pressure transducers
- Corrosion-resistant pressure transducers
- Differential pressure transducers

### Fluid Sensing

- Ultrasonic liquid level sensors
- Fluid property sensors
- Submersible pressure sensors

### Temperature Sensing

- RTDs
- Thermocouples
- Temperature probes

### Motion Control

- String and linear potentiometers
- LVDTs and RVDTs
- Rotary encoders and tilt sensors

### Vibration Sensing & Position/Presence Sensing/Detection

- LVDT
- Load cells
- MR sensors
- Accelerometers
- Inclinometers

### Force & Torque Sensing

- Load cells and multicomponent force sensors
- Contact/non-contact torque sensors

### Humidity Sensing

- Humidity sensing modules
- Digital humidity sensors and assemblies

# AUTOMOTIVE

Data is critical for making vehicles safer, more connected and greener. Customers rely on our sensor technologies to provide data for control, adaptation and response of vehicle functions and features that increase safety, comfort, efficiency, and more. We work closely with customers to provide solutions for demanding and harsh applications such as automated transmissions, engines, clutch, brake and exhaust. Our products are found in vehicles traveling the world's roads and highways.



## APPLICATION SOLUTIONS

### Transmissions & Clutch

- Drive mode sensors and transmission range sensors for automated transmissions
- Speed sensors for automated transmissions
- Dual clutch transmission modules with position, speed and temperature sensing
- Neutral position or all gear detection for manual transmissions
- Clutch master and clutch slave cylinder sensors
- Pressure sensors for automated transmission hydraulic pressure measurement

### Chassis & Brake

- Current sensing
- Brake light switches in the pedal box or on the brake master cylinder
- Brake pressure sensors
- Seat position sensors
- Weight classification
- Wheel speed sensors
- Chassis switches for convertible roof tops
- Impact sensors

### Engine & E-Motor

- Engine air intake humidity, pressure and temperature sensing
- Direct injection pressure sensors
- Resolver sensors for E-Motors
- Actuator sensors for EGR or turbo charger

### Cabin

- Humidity and temperature sensors

# CONSUMER



Whether it's an altimeter built into a wearable band to measure how many steps we climb each day, or a sports watch charting the ascent up one of the world's highest mountain peaks, our miniature sensors are used to convey critical information for the dashboard of our daily lives. Our dive computer sensors help provide safety in leisure activities, while our piezo film enables your bed to monitor your heart rate, breathing and even how well you sleep. We've been making sensors for wearables before there were wearables. We're recognized for our technical skill in miniaturization, low power consumption, and high-performance. That's why our sensors are in harsh environments, from the world's highest parachute jump to the deepest dive.

## APPLICATION SOLUTIONS

### Mobile (Smart) Phones

- Barometric pressure sensor to measure altitude and in-building telemetry for emergency call
- Humidity sensor for personal environment adaption and home comfort control system

### Multi-Function Watches

- Barometric pressure sensor to measure altitude and in-building telemetry
- Photo optic (SpO<sub>2</sub>) sensor for heart-rate monitoring
- Altimeter to measure floors climbed and calorie estimation

### Fitness Equipment

- Force sensor for pedal force and energy measurement

### Sleep Monitors

- Piezo film detects body movement and vital signs to determine sleep phase and quality

### Dive Computers

- Water pressure sensor to measure dive depth

### Hobby Drone/Unmanned Aerial Vehicles (UAV)

- Barometric pressure sensor to regulate and report altitude and confirm vertical stability
- MR sensors for the camera 3D stabilization platforms
- NTC temperature sensors to monitor charging for high capacity LiPo batteries

### Air Quality Monitors/ Room Comfort

- Humidity sensor for personal environment adaption and home comfort control system
- Miniature digital pressure sensor for barometric pressure

### Weather Stations

- Miniature digital pressure sensor for barometric pressure and trend
- Miniature digital humidity sensor for atmospheric humidity and trend
- Reed switch or MR sensor for wind-speed measurement
- Temperature sensor for environmental monitoring

### Smart Writing Tools

- Piezo film ultrasonic components in smartphone and whiteboard digitizers for graphics and handwriting capture

### GPS Devices

- Barometric pressure sensor for altitude and navigation dead-reckoning

### Cycle Computers

- Barometric pressure sensor for altitude profile and energy consumption

### Smart Scales

- Force sensor for body weight
- Barometric compensation for air quality sensor

### Smart Sensor Hub

- TE Connectivity offers a variety of smart sensor hub development tools optimized to aid engineers with integrating sensors into their product designs



# INDUSTRIAL



While the future of the Industrial Internet of Things (IIoT) is not yet certain, one thing is: sensors will play a critical role. Industrial applications span a wide range of applications, from banknote handling to printers and ovens. Our broad portfolio of products offers customers many options to meet specific performance, application and certification requirements. We work closely to help identify the best solution to meet the needs of the customer.

## APPLICATION SOLUTIONS

### Pressure Sensing

- Analog and digital pressure sensing modules
- Altimeter pressure module
- Media isolated pressure sensing modules
- Heavy industrial pressure transducers
- Miniature pressure transducers
- Corrosion-resistant pressure transducers
- Differential pressure transducers

### Fluid Sensing

- Ultrasonic liquid level sensors
- Fluid property sensors
- Submersible pressure sensors

### Temperature Sensing

- RTDs
- Thermocouples
- Temperature probes

### Motion Control

- String and linear potentiometers
- LVDTs and RVDTs
- Rotary encoders and tilt sensors

### Vibration Sensing and Position/Presence Sensing/Detection

- LVDT
- Load cells
- MR Sensors
- Accelerometers
- Inclinometers

### Force and Torque Sensing

- Load cells and multicomponent force sensors
- Contact and non-contact torque sensors

### Humidity Sensing

- Humidity sensing modules
- Digital humidity sensors and assemblies

# INDUSTRIAL & COMMERCIAL TRANSPORTATION



When performance and reliability count, engineers rely on us to help solve tough industry challenges such as emissions reduction, power train improvement and added comfort. We're a leader in providing sensor technologies and associated software/diagnostic capabilities built on market experience and technical expertise. We work closely with customers to design and provide solutions critical for a wide range of harsh and demanding applications, including exhaust, engines, transmissions, braking, suspension and cabins.

## APPLICATION SOLUTIONS

### Engine Management

- High pressure common rail exhaust manifold pressure, fuel pressure, oil pressure
- Humidity air intake monitoring, Nitrogen Oxide (NOx) emissions management
- Engine oil fluid level
- Coolant fluid level
- Low oil level switch
- Engine oil condition, fuel identification and quality
- Cam/crank shaft speed
- Engine oil temperature
- Air intake flow

### Aftertreatment Systems

- Urea temperature, urea tank or urea pump
- In-line urea quality, direct integration to urea dosing line
- In-tank urea quality, level, heating and temperature assembly
- Urea pressure, urea tank or urea pump
- High temperature exhaust gas
- Valve position (EGR, SCR)

### Transmission

- Transmission oil pressure
- Transmission oil level
- Clutch position
- Dual clutch transmission module
- Transmission oil quality
- Transmission input and output speed
- Transmission oil temperature

### Vehicle Control & Management

- Anti-tilt and ride stability
- Hydraulic fluid condition
- Hydraulic fluid pressure
- Fuel level
- Short to long stroke boom position
- Hydraulic oil level
- Load pin
- Power steering fluid level single or multi-point
- Steering control, hydraulic spool valve
- Air brakes

### Cabin & Occupant Safety

- Anti-fogging and HVACR
- Moving parts for rotary position
- Seat occupancy
- Cab and seat level
- Seat, handbrake and footbrake position
- Safety interlock switches
- HVACR system control
- Ambient air temperature
- Brake light switch

# INTELLIGENT BUILDINGS



Buildings today require reliable solutions to confirm they are operating safely and efficiently. As a global designer and manufacturer of sensors and sensor-based systems, we work closely with building engineers in both the development and instrumentation of automated systems. Our sensors are designed and manufactured to exacting specifications, often on a custom basis. Together with our customers, we are working to solve today's toughest challenges. Our portfolio can address the breadth and depth of applications needed for today's intelligent buildings.

## APPLICATION SOLUTIONS

### Burners & Boilers

- Inlet and outlet water temperature
- Inside and outside air temperature
- Level detection

### Chillers, Compressors & Heat Pumps

- Inlet and outlet refrigerant temperature and pressure
- Inside and outside air temperature
- Motor temperature, oil pressure, and temperature

### Wall-mount Units & Field Devices

- Air temperature and humidity
- Damper position
- Air differential pressure

### Variable Air Volume (VAV)

- Inlet and outlet air temperature and pressure
- Air humidity

### Elevators

- Elevator car position

### Security

- Door and window position

# MEDICAL



Because accurate monitoring, diagnosis and treatment counts, today's medical devices rely on our high-performance sensor technologies to meet exacting specifications, including ISO 13485 certification and FDA registration. We are a leading provider of sensor solutions to the medical device market. Our engineers work with device manufacturers to provide application-specific, standard and custom requirements, from product concept through manufacturing. Our sensors meet the rigorous demands of a wide range of medical and healthcare applications.

## APPLICATION SOLUTIONS

### Cardiovascular Monitoring & Diagnosis

- Disposable blood pressure sensor
- Piezo film for electronic stethoscope
- Piezo film sensor for heart rhythm monitoring
- Photo optic sensors for pulse oximetry (SpO<sub>2</sub>)
- Miniature NTC thermistors for thermo dilution
- Piezo ultrasonic transducers and temperature sensors for ultrasound imaging

### Cardiovascular Treatment

- Force, pressure and temperature sensors for ablation catheter
- Silicon MEMS pressure sensor for angioplasty balloon inflating pump
- Temperature sensors and silicon MEMS pressure sensors for blood transfusion and oxygenation systems
- Silicon MEMS pressure sensor for contrast dye infusion
- Piezo film for discrete vital signs monitoring
- Temperature sensors for myocardial needle probes
- Piezo film and position MR sensor for pacemaker
- Variety of sensor solutions for ventilators and respirators

### Patient Monitoring & Diagnosis

- Microfused load cell for body weight
- Piezoelectric transducers for bone density
- Piezo film for hospital bed vital signs
- Temperature sensor for skin temperature
- Pressure and temperature sensors for urinary catheters and urodynamic testing
- Variety of sensors for sleep apnea studies
- Thermopile for non-contact thermometry
- Thermistors for contact thermometry

### Patient Treatment

- MR sensor for insulin pump
- Ultrasonic sensor for bubble and liquid level detection
- Variety of sensor solutions for dialysis machines, infusion pumps and smart beds
- Silicon MEMS pressure sensor for hospital gas monitoring
- Humidity and temperature sensors for premature newborn cabinet
- Variety of sensor solutions for ventilators and respirators
- Force sensors for infusion pumps

### Surgical/Delivery

- Silicon MEMS pressure sensor and piezo film for assisted baby delivery
- Miniature temperature sensors for brain tumor hypodermic needle probes
- Force and pressure sensors for endoscopic surgery
- Low-cost miniature silicon MEMS pressure sensors for intrauterine monitoring during labor
- Silicon MEMS pressure sensor for ocular surgery
- Temperature sensor for patient warming/cooling
- Cable extension sensors and rotary encoders for robotic surgery
- Variety of sensor solutions for surgical devices and instruments
- Piezo film sensor for anesthesia delivery

### Home & Mobile Health Care/Wearable Medical Devices

- Sensors for wearable health devices
- Sensors for mobile infusion and insulin pumps
- Sensors for mobile oxygen delivery
- Altitude pressure sensor for patient fall detection

# OIL & GAS



The energy market continues to face new challenges with deeper drilling, higher temperatures and higher pressures. Our latest sensor technologies with new electronics, materials, and design packages provide safe, reliable, and accurate data measurements—all while enduring some of the harshest application environments on earth. By combining application expertise and global hazardous location certifications, our broad portfolio of standard designs and custom packages are helping to improve performance and reliability for the oil and gas industry.

## APPLICATION SOLUTIONS

### Sub-sea Valve Position Feedback

- Nickel alloy construction for maximum corrosion resistance for 30 year life expectancy
- Latest analog and digital signal processing including CANbus CiA443
- Sub-sea pressure up to 7,500 psi (517 bar)

### Power Generation Valve Position

- Valve position measurement for high temperature steam, gas and nuclear turbines
- CSA and ATEX intrinsically safe certified for hazardous locations
- Signal conditioning with analog and digital RS-485 outputs

### Down-hole Borescope Position Sensing

- High pressure designs (Vented designs up to 35,000 psi)
- Continuous operation at 400°F
- Custom designs and packages available

### Upstream Well-head Monitoring

- Global certifications including UL, CSA, ATEX, and IECEx
- Latest sensing MEMS technology with solid stainless steel or alloy construction
- Low current consumption options for RTU/SCADA applications

### Gas Compression

- Certified for Class I Divisions I and II, ATEX, and IECEx
- Gage, compound, bidirectional, absolute, and differential pressure ranges
- Compact designs

### Offshore Rigs

- Intrinsically safe and explosion proof designs up to 20,000 psi (1,379 bar)
- IEC 61508 SIL2 certification
- High strength nickel alloy for high H<sub>2</sub>S content
- BOP transmitter packaging with sub-sea connectors

### Hydraulic Fracturing Equipment

- Hammer union pressure transmitters with modular design
- Flush diaphragm pressure transducers for water pressure monitoring
- Robust temperature transmitters

### Work Boats

- ABS type approval
- Flush diaphragm sensors for ballast level monitoring
- PVDF/PTFE submersible sensors for tank level measurement

### Chemical Tanks & Totes

- Internally and externally mounted pressure transducers from 1 psi
- Optional PVDF/PTFE materials for corrosive liquids
- Intrinsically safe ratings for hazardous areas

# TEST & MEASUREMENT



Our sensors for test and measurement applications support customers across all of our market verticals. Our sensor technologies and engineering capabilities are used for product research, development, testing and evaluation (RDT&E). Each of these critical areas has unique technology and performance requirements. We work closely with RDT&E engineers to determine the right solution, as our broad portfolio can address the breadth and depth of applications across a number of markets.

## APPLICATION SOLUTIONS

### Aero Test: Aerodynamic Research and Flight Testing

- Pressure scanners for turbine engine R&D for aircraft and power generation
- Pressure scanners to facilitate aerodynamic testing in wind tunnel
- Pressure scanners used in rotorcraft and aircraft flight testing

### Auto Test: Automotive Safety & Design Testing

- Accelerometers for use in automotive crash testing
- Force sensors used in seat belts and crash test dummies
- Pressure and position transducers designed for use in motorsport

### Road Traffic Monitoring

- Complete solutions and installation support for weigh-in-motion, speed and vehicle classification/count applications

### Environmental Monitoring/ Water Monitoring

- Pressure sensors for monitoring water usage (i.e. waste water)
- Level transducers used in managing water resources (i.e. reservoir)

### Test Equipment & Instrumentation

- Standard and custom sensors supporting aerospace and defense industries
- Broad array of sensors supporting general R&D in academic, public and private sectors

# SENSORS & MARKETS

	Aerospace & Defense	Appliances	Automation & Control	Automotive	Consumer	Industrial	Industrial & Commercial Transportation	Intelligent Buildings	Medical	Oil & Gas	Test & Measurement
Automotive				●			●				
Digital Component					●						
Flow		●		●		●	●	●	●		
Fluid Property	●			●		●	●				
Force	●	●	●		●	●	●		●		●
Humidity	●	●		●	●	●	●	●	●		●
Liquid Level	●	●				●	●	●	●		
Photo Optic									●		
Piezo Film	●				●	●			●		
Position	●	●	●	●	●	●	●	●	●	●	●
Pressure	●	●	●	●	●	●	●	●	●	●	●
Rate and Inertial	●					●					●
Scanners and Systems											●
Temperature	●	●	●	●	●	●	●	●	●	●	●
Torque			●			●					●
Ultrasonic						●			●		●
Vibration			●			●					●
Water Level			●			●					●

## Measurement Specialties (MEAS) Quality Certificates:

- AS/EN 9100
- ATEX
- ATEX 949EC
- CE-MDD
- CMDR-Health Canada
- EN 13980
- ESA 266
- ESCC266E
- ESCC 400C
- FDA
- ISO 13485
- ISO 14001
- ISO 9001
- Measuring Instruments Directive 2004/22/EC annex D
- NASA Qualified
- NSF-61 Water Quality
- PART21G
- TS 16949

## American Sensor Technologies (AST) & Macro Sensors (MACRO) Approvals/Certifications:

- ABS
- ATEX
- CCOE
- CNEX
- CRN B31.3
- CSA
- CE
- EC 79
- IEC 61508
- IECEx
- ISO 9001
- KGS (Korean Gas Safety)
- UL








# AUTOMOTIVE SENSORS

TE sensors have become an integral part of many modern vehicle architectures, or nervous systems. Our sensor technologies for passenger cars provide data for control, adaptation, and response of vehicle functions and features that make vehicles safer, greener and more connected.










## ENGINE/EXHAUST SENSORS

							
<b>Industry</b>	Passenger car	Passenger car	Passenger car	Passenger car	Passenger car	Passenger car	Passenger car
<b>Application</b>	E-motor for hybrid and electrical vehicles	E-motor for hybrid and electrical vehicles	Turbo charger	Turbo charger	Air intake of combustion engine	Urea pressure	Ambient air temperature
<b>Functions</b>	Measuring rotor position of E-motor	Measuring rotor position of E-motor	Measuring piston position of pneumatic actuator (Vacuum)	Measuring piston position of pneumatic actuator (Vacuum)	Mass air flow (MAF)	Vehicle engine control	Temperature monitoring
<b>Technology</b>	MCR (Multi-coil resolver)	SCR (Single-coil resolver)	PLCD	3D Hall (Moving magnet)	Flow sensor	Pressure sensor	Temperature sensor
<b>Features</b>	<ul style="list-style-type: none"> <li>• Non-contact measurement of rotor position</li> <li>• Analog output</li> <li>• High accuracy</li> <li>• Temperature up to 150°C</li> <li>• Rotational speed up to 20,000 rpm</li> <li>• Adaptable to pole pairs of E-motor</li> </ul>	<ul style="list-style-type: none"> <li>• Non-contact measurement of rotor position</li> <li>• Analog output</li> <li>• High accuracy for high temperature applications</li> <li>• Slim design for IMG applications in combination with oil</li> <li>• Rotational speed up to 20,000 rpm</li> <li>• Adaptable to pole pairs of E-motor</li> </ul>	<ul style="list-style-type: none"> <li>• Non-contact travel measurement inside the actuator</li> <li>• Unguided magnet</li> <li>• Wear and tear free</li> <li>• High life time accuracy</li> </ul>	<ul style="list-style-type: none"> <li>• Non-contact travel measurement inside the actuator</li> <li>• Unguided magnet</li> <li>• Wear and tear free</li> <li>• High life time accuracy</li> </ul>	<ul style="list-style-type: none"> <li>• High sensitivity at low heater temperatures</li> <li>• Fast response time</li> <li>• True air temperature sensor</li> <li>• Hot film anemometer component</li> <li>• Hybrid package</li> </ul>	<ul style="list-style-type: none"> <li>• Amplified</li> <li>• Mountable with o-ring seal</li> <li>• Stainless Steel wetted surface</li> <li>• ASIC calibrated</li> <li>• Absolute, sealed gage</li> <li>• Analog output</li> <li>• Cable option</li> </ul>	<ul style="list-style-type: none"> <li>• Epoxy or glass coated</li> <li>• Radial, beads</li> <li>• Interchangeable</li> <li>• Moisture resistant</li> <li>• Stability</li> </ul>

## BRAKE SENSORS

					
<b>Industry</b>	Passenger car	Passenger car	Passenger car	Truck / Passenger car	Truck / Passenger car
<b>Application</b>	Regenerative braking	Pedal box	Pedal box	Anti-lock brake system	Anti-lock brake system
<b>Functions</b>	Measuring piston position of brake master cylinder	Measuring brake pedal position	Measuring brake pedal position	Wheel speed detection	Wheel speed detection
<b>Technology</b>	Active PLCD (Moving magnet)	Hall switch (Magnet integrated in sensor)	Hall switch (Magnet integrated in sensor)	Hall (Magnet integrated in sensor)	Hall (Magnet integrated in sensor)
<b>Features</b>	<ul style="list-style-type: none"> <li>• Non-contact travel measurement through cylinder wall</li> <li>• Optional redundancy</li> </ul>	<ul style="list-style-type: none"> <li>• Easy adjustment to brake pedal</li> <li>• High switching point accuracy</li> <li>• No wear and tear</li> <li>• Two and three wire interface available</li> </ul>	<ul style="list-style-type: none"> <li>• Easy adjustment to brake pedal (Self-adjusting features)</li> <li>• High switching point accuracy</li> <li>• Redundancy</li> </ul>	<ul style="list-style-type: none"> <li>• Long life time and high reliability</li> <li>• Compact size and comparative price</li> <li>• Flexible design depending on customer requirements</li> <li>• Non-contact hall sensor</li> <li>• Rapid response time</li> <li>• Tone wheel detection</li> </ul>	<ul style="list-style-type: none"> <li>• Long life time and high reliability</li> <li>• Compact size and comparative price</li> <li>• Flexible design depending on customer requirements</li> <li>• Non-contact hall sensor</li> <li>• Rapid response time</li> <li>• Tone wheel detection</li> </ul>

## CHASSIS SENSORS



	Hall Switch Cable Assemblies	Seat Track Position Sensor (Option 1)	FIS/Z-FIS Front Impact Sensor	P-SIS Side Impact Sensor	Weight Sensor	MEAS H2TG / H2TD Series	MEAS Ni1000ST
<b>Industry</b>	Passenger car	Passenger car	Passenger car	Passenger car	Passenger car	Passenger car	Passenger car
<b>Application</b>	Convertible roof systems	Dual staged airbag	Front impact detection	Side impact detection	Passenger detection	Anti-fogging and HVACR	Engine oil and transmission oil temperature
<b>Functions</b>	Digital position detection	Measuring seat track position	Measuring acceleration data for front impact detection	Measuring the quick increase of pressure within cavities of passenger car door to determine the airbag deployment	Measuring seat weight to classify passenger for airbag deployment	Dewpoint and windshield temperature measurement	Thermal compensation, thermal management
<b>Technology</b>	Hall switch (Magnet integrated in sensor)	Hall switch (Magnet integrated in sensor)	MEMS	MEMS	Strain gage technology	Humidity sensor	Temperature sensor
<b>Features</b>	<ul style="list-style-type: none"> <li>Variety of cable assembly with integrated hall switches</li> </ul>	<ul style="list-style-type: none"> <li>Triggered by seat track (= no moving magnet)</li> <li>Current interface</li> <li>Small geometry</li> <li>Diagnostics ability due to two-wire interface</li> </ul>	<ul style="list-style-type: none"> <li>Small package and robust design</li> <li>PS15-A data transmission mode</li> </ul>	<ul style="list-style-type: none"> <li>Small package and robust design</li> <li>PAS4 data transmission mode</li> </ul>	<ul style="list-style-type: none"> <li>High resolution of weight</li> <li>Very small package (Integration to seat track)</li> <li>Sensor array with ECU for in system calibration</li> <li>Mechanical overload protection</li> <li>Very robust design</li> </ul>	<ul style="list-style-type: none"> <li>Electronics fully protected with potting material</li> <li>Analog or digital (LIN) output</li> <li>Cost effective solution</li> </ul>	<ul style="list-style-type: none"> <li>Harsh environment compatible</li> <li>Very small dimensions</li> <li>Very short response time</li> <li>Good linearity</li> <li>High temperature coefficient</li> <li>Low power consumption</li> </ul>

## CLUTCH SENSORS



	Dual Clutch Position Sensor	Clutch Position Sensor (Option 1)	Clutch Position Sensor (Option 3)	Clutch Position Sensor (Option 4)	Clutch Position Sensor (Option 5)
<b>Industry</b>	Passenger car	Passenger car	Passenger car	Passenger car	Passenger car
<b>Application</b>	Dual clutch transmission	Cruise control, engine management, interlock, electrical park brake	Automated Manual Transmission (AMT)	Automated Manual Transmission (AMT)	Automated Manual Transmission (AMT)
<b>Functions</b>	Measuring piston position of clutch actuator	Measuring piston position of clutch master cylinder	Measuring piston position of concentric slave cylinder inside the gearbox	Measuring piston position of concentric slave cylinder	Measuring piston position of concentric slave cylinder inside the gearbox
<b>Technology</b>	Active PLCD (Moving magnet)	Hall (Moving magnet)	Passive PLCD (Moving magnet)	Passive PLCD (Moving magnet)	Passive PLCD (Moving magnet)
<b>Features</b>	<ul style="list-style-type: none"> <li>Two sensors in one housing</li> <li>Small and robust design</li> <li>Oil sealed design</li> </ul>	<ul style="list-style-type: none"> <li>Non-contact measurement through cylinder wall</li> <li>Up to three switching points or travel measurement up to 40 mm</li> </ul>	<ul style="list-style-type: none"> <li>Non-contact travel measurement</li> <li>Robust design (Temperatures up to 160°C)</li> <li>Signal processing in transmission controller</li> </ul>	<ul style="list-style-type: none"> <li>Non-contact travel measurement</li> <li>Short term peak (Temperatures up to 150°C)</li> </ul>	<ul style="list-style-type: none"> <li>Non-contact travel measurement</li> <li>Robust design (Temperatures up to 160°C)</li> <li>Signal processing in transmission controller</li> </ul>

## PLATFORM SENSORS


						
	<b>Hall Switch SW01P</b>	<b>Hall Sensor T40MC2</b>	<b>PLCD-15M</b>	<b>PLCD-25M</b>	<b>PLCD-50M</b>	<b>Speed Sensor</b>
<b>Industry</b>	Passenger car	Truck / Passenger car	Passenger car	Passenger car	Passenger car	Passenger car
<b>Application</b>	Body and chassis	Engine, transmission, clutch, chassis, brake	Transmission, chassis, engine	Transmission, brake, clutch, steering, engine	Transmission, brake, clutch, steering, engine	Transmission
<b>Functions</b>	Digital position detection	Measuring travel position	Measuring travel or angle position	Measuring travel or angle position	Measuring travel or angle position	Measuring gear speed
<b>Technology</b>	Hall switch (Magnet integrated in sensor)	Hall (Moving magnet)	Active PLCD (Moving magnet)	Active PLCD (Moving magnet)	Active PLCD (Moving magnet)	Hall (With integrated magnet)
<b>Features</b>	<ul style="list-style-type: none"> <li>Triggered by ferromagnetic part (= no moving magnet)</li> <li>Current interface</li> <li>Diagnostics ability due to two-wire interface</li> <li>Temperature range -40°C up to 150°C</li> </ul>	<ul style="list-style-type: none"> <li>Non-contact measurement up to 40 mm</li> <li>Highly insensitive to vibration</li> <li>Temperature up to 150°C</li> <li>Analog or PWM interface</li> <li>Small geometry</li> <li>Optional redundancy</li> <li>Supply 5 V (Optional 12 V)</li> <li>4-way MCON connector interface</li> </ul>	<ul style="list-style-type: none"> <li>Angle up to 120°</li> <li>Highly insensitive to vibration</li> <li>Temperature up to 150°C</li> <li>Redundancy possible</li> <li>Analog or PWM interface</li> <li>Supply 5 V (Optional 12 V)</li> <li>4-way MQS connector sealed</li> <li>Wide range of magnet design</li> </ul>	<ul style="list-style-type: none"> <li>Measuring range 15-28 mm</li> <li>Highly insensitive to vibration</li> <li>Temperature up to 150°C</li> <li>Redundancy possible</li> <li>Analog or PWM interface</li> <li>Supply 5 V (Optional 12 V)</li> <li>4-way MQS sealed</li> <li>Wide range of magnet design</li> </ul>	<ul style="list-style-type: none"> <li>Angle up to 120°</li> <li>Highly insensitive to vibration</li> <li>Temperature up to 150°C</li> <li>Redundancy possible</li> <li>Analog or PWM interface</li> <li>Supply 5 V (Optional 12 V)</li> <li>4-way MQS connector sealed</li> <li>Wide range of magnet design</li> </ul>	<ul style="list-style-type: none"> <li>Triggered by ferromagnetic gear wheel</li> <li>Current interface with direction detection</li> <li>Sealed connector interface</li> <li>Diagnostics ability due to two-wire interface</li> <li>IP6K9</li> <li>Temperature range -40°C up to 150°C</li> </ul>

## TRANSMISSION SENSORS

					
	<b>All Gear Detection Sensor</b>	<b>Drive Mode Sensor</b>	<b>DCT Transmission Sensor Module</b> (For shift fork position, gear speed and temperature)	<b>Speed Sensor SP1M</b>	<b>Neutral Position Sensor</b>
<b>Industry</b>	Passenger car	Passenger car	Passenger car	Passenger car	Passenger car
<b>Application</b>	Manual Transmission (MT)	Automated Transmission (AT)	Dual Clutch Transmission (DCT)	Transmission	Start-stop application
<b>Functions</b>	Measuring gear and shift position	Measuring drive mode position (PRND) inside the gearbox	Measuring shift fork position, gear speed and temperature inside transmission	Measuring gear speed	Measuring gear lever position inside manual transmission
<b>Technology</b>	3D hall solution	Active PLCD (Moving magnet) or hall	Active PLCD, hall and NTC	Hall (With integrated magnet)	Hall (Moving magnet)
<b>Features</b>	<ul style="list-style-type: none"> <li>Non-contact rotary and travel measurement integrated in one housing</li> <li>Robust design</li> </ul>	<ul style="list-style-type: none"> <li>Non-contact travel measurement</li> <li>Robust and oil sealed design</li> <li>High measurements accuracy</li> <li>No wear and tear</li> </ul>	<ul style="list-style-type: none"> <li>Sensor module with integrated speed (2X), position (4X) and temperature sensor</li> <li>Oil sealed 12 pin pass through connector system</li> <li>Highly insensitive against vibration, temperature and pollution inside the transmission</li> </ul>	<ul style="list-style-type: none"> <li>Triggered by ferromagnetic gear wheel</li> <li>Current interface with direction detection</li> <li>Sealed connector interface</li> <li>Diagnostics ability due to two-wire interface</li> <li>IP6K9</li> <li>Temperature range -40°C up to 150°C</li> </ul>	<ul style="list-style-type: none"> <li>Non-contact measurement</li> <li>Oil tight connector interface</li> <li>High life time accuracy</li> <li>Small magnet design</li> <li>Diagnostics ability due to three-wire interface</li> </ul>

# DIGITAL COMPONENT SENSOR DEVELOPMENT TOOLS

Many of our digital sensor products are available in low power and small form factors. They are suited for wearable and miniature devices that are used to collect and share critical data for health monitoring, fitness, air quality, aerospace, battery powered, and related applications. To increase knowledge sharing and reduce time to market, we have teamed with semiconductor manufacturers to design and provide plug and play tools for Xplained Pro Sensor Hub, MicroChip PicTail, and Digilent Pmod™ based development platforms. In addition, we offer several wireless demo/development tools to help engineers quickly achieve their design objectives with wireless applications. These tools are supported with software/firmware drivers, documentation, and graphic user interfaces to make the development process easy.

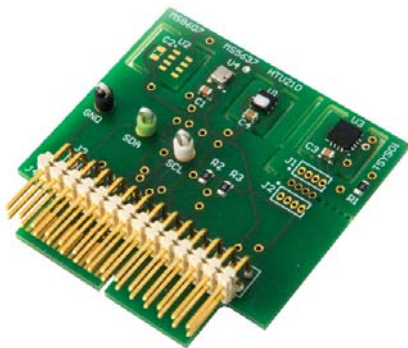

## WIRELESS DEMO AND DEVELOPMENT KITS

## PICTAIL PLUS

					
Type	<b>MEAS Environmental Sensor Tag</b> Humidity, Temperature, Pressure	<b>MEAS Wireless M5600 Series</b> Pressure	<b>MEAS Wireless U5600 Series</b> Pressure	<b>MEAS Wireless FX1951</b> Force	<b>MEAS HTU21D(F), MS5637, MS8607, TSYS01*</b> Humidity, Temperature, Pressure
Specifications	<ul style="list-style-type: none"> <li>• 0 - 100% RH</li> <li>• 20°C to 85°C</li> <li>• 300 to 1,200 mbar</li> </ul>	<ul style="list-style-type: none"> <li>• 50 - 15K psi</li> <li>• Type G/S/C</li> </ul>	<ul style="list-style-type: none"> <li>• 2 - 10K psi</li> <li>• Type G/S/C/A</li> </ul>	<ul style="list-style-type: none"> <li>• 0 - 50 lbf</li> </ul>	<ul style="list-style-type: none"> <li>• 0 - 100% RH</li> <li>• -20°C to 85°C</li> <li>• 300 to 1,200 mbar</li> </ul>
Communication	Standard 2.4 GHz wireless communication	Standard 2.4 GHz wireless communication	Standard 2.4 GHz wireless communication	Standard 2.4 GHz wireless communication	
Application	iOS 7.0+ Android™ 4.3+	iOS 7.0+ Android™ 4.3+	iOS 7.0+ Android™ 4.3+	iOS 7.0+ Android™ 4.3+	TE Demo: PicTail Plus Partner Board: Microchip Explorer 16

\*Temperature System Sensor (TSYS) Series

## PERIPHERAL MODULES

Digilent Pmod™



	<b>MEAS HTU21D(F)</b>	<b>MEAS MS5637</b>	<b>MEAS MS8607</b>	<b>MEAS TSYS01*</b>	<b>MEAS TSYS02D*</b>	<b>MEAS KMA36(A)</b>
<b>Type</b>	Humidity	Pressure	Pressure, Temperature, Humidity	Temperature	Temperature	Angular Position
<b>Specifications</b>	<ul style="list-style-type: none"> <li>• 0 to 100% RH</li> <li>• -40 to 125°C</li> <li>• 3.3 to 5.5 V</li> </ul>	<ul style="list-style-type: none"> <li>• 10 to 2,000 mbar</li> <li>• -40 to 85°C</li> <li>• 1.5 to 3.6 V</li> </ul>	<ul style="list-style-type: none"> <li>• 10 to 2,000 mbar</li> <li>• -40 to 85°C</li> <li>• 0 to 100% RH</li> <li>• 1.5 to 3.6 V</li> </ul>	<ul style="list-style-type: none"> <li>• -40 to 125°C</li> <li>• 2.2 to 3.6 V</li> </ul>	<ul style="list-style-type: none"> <li>• -40 to 125°C</li> <li>• 1.5 to 3.6 V</li> </ul>	<ul style="list-style-type: none"> <li>• 0 to 360°</li> <li>• -25 to 85°C</li> <li>• 2.9 to 6.0 V</li> </ul>
<b>Accuracy</b>	±3% RH	±2 mbar	±3% RH, ±2 mbar, ±1.0°C	±0.1°C	±0.2°C	±0.1°
<b>Comm. Interface</b>	I <sup>2</sup> C	I <sup>2</sup> C	I <sup>2</sup> C	I <sup>2</sup> C	I <sup>2</sup> C	I <sup>2</sup> C
<b>Board Connections</b>	6 x 2 x 0.1" header input & output	6 x 2 x 0.1" header input & output	6 x 2 x 0.1" header input & output	6 x 2 x 0.1" header input & output	6 x 2 x 0.1" header input & output	6 x 2 x 0.1" header input & output
<b>Compatibility</b>	Development systems compatible with Digilent Pmod™ connections	Development systems compatible with Digilent Pmod™ connections	Development systems compatible with Digilent Pmod™ connections	Development systems compatible with Digilent Pmod™ connections	Development systems compatible with Digilent Pmod™ connections	Development systems compatible with Digilent Pmod™ connections

## WING BOARDS



	<b>MEAS HTU21D(F)</b>	<b>MEAS MS5637</b>	<b>MEAS MS8607</b>	<b>MEAS TSYS01*</b>	<b>MEAS TSYS02D*</b>	<b>MEAS KMA36(A)</b>
<b>Type</b>	Humidity	Pressure	Pressure, Temperature, Humidity	Temperature	Temperature	Angular Position
<b>Specifications</b>	<ul style="list-style-type: none"> <li>• 0 to 100% RH</li> <li>• -40°C to 125°C</li> <li>• 3.3 to 5.5 V</li> </ul>	<ul style="list-style-type: none"> <li>• 10 to 2,000 mbar</li> <li>• -40 to 85°C</li> <li>• 1.5 to 3.6 V</li> </ul>	<ul style="list-style-type: none"> <li>• 10 to 2,000 mbar</li> <li>• -40°C to 85°C</li> <li>• 0 to 100% RH</li> <li>• 1.5 to 3.6 V</li> </ul>	<ul style="list-style-type: none"> <li>• -40°C to 125°C</li> <li>• 2.2 to 3.6 V</li> </ul>	<ul style="list-style-type: none"> <li>• -40°C to 125°C</li> <li>• 1.5 to 3.6 V</li> </ul>	<ul style="list-style-type: none"> <li>• 0 to 360°</li> <li>• -25°C to 85°C</li> <li>• 2.9 to 6.0 V</li> </ul>
<b>Accuracy</b>	±3% RH	±2 mBar	±3% RH, ±2 mBar, ±1.0°C	±0.1°C	±0.2°C	±0.1°
<b>Comm. Interface</b>	I <sup>2</sup> C	I <sup>2</sup> C	I <sup>2</sup> C	I <sup>2</sup> C	I <sup>2</sup> C	I <sup>2</sup> C
<b>Board Connections</b>	10 x 2 x 0.1" header input & output	10 x 2 x 0.1" header input & output	10 x 2 x 0.1" header input & output	10 x 2 x 0.1" header input & output	10 x 2 x 0.1" header input & output	10 x 2 x 0.1" header input & output
<b>Compatibility</b>	Configured to operate with the Xplained Pro development platform	Configured to operate with the Xplained Pro development platform	Configured to operate with the Xplained Pro development platform	Configured to operate with the Xplained Pro development platform	Configured to operate with the Xplained Pro development platform	Configured to operate with the Xplained Pro development platform

## DRIVERS



	<b>MEAS HTU21D(F)</b>	<b>MEAS MS5637</b>	<b>MEAS MS8607</b>	<b>MEAS TSYS01*</b>	<b>MEAS TSYS02D*</b>	<b>MEAS KMA36(A)</b>
<b>Type</b>	SAMD2x Microchip PIC24x Family FPGA Bare Metal - Linux® / Android™	SAMD2x Microchip PIC24x Family FPGA Bare Metal - Linux® / Android™	SAMD2x Microchip PIC24x Family FPGA Bare Metal - Linux® / Android™	SAMD2x Microchip PIC24x Family FPGA Bare Metal - Linux® / Android™	SAMD2x Microchip PIC24x Family FPGA Bare Metal - Linux / Android™	SAMD2x Microchip PIC24x Family FPGA Bare Metal - Linux® / Android™
<b>Language</b>	ANSI C Coding	ANSI C Coding	ANSI C Coding	ANSI C Coding	ANSI C Coding	ANSI C Coding

\*Temperature System Sensor (TSYS) Series

# FLOW SENSORS

We manufacture reliable and accurate mass air flow (MAF) sensors for a variety of automotive, medical and industrial gas flow applications. Our flow switches are suitable for hot and cold potable water due to rugged brass housings and the ability to operate from a small head of water. They are typically mounted in a well-defined channel, directly in the flowing media. Our flow switches are designed for water control, power shower, central heating systems, circulation pump protection, cooling and leak detection. They feature reed switch reliability and are easy to install.



## MASS AIR FLOW SENSORS



### MEAS LMM-H03

Package	Hybrid
Type	<ul style="list-style-type: none"> <li>Hot film anemometer component</li> <li>Bidirectional</li> </ul>
Operating Temp.	-40°C to 125°C
Unique Features	High sensitivity at low heater temperatures, fast response time, true air temperature sensor
Calibration / Accuracy	Dependent on electronics
Dimensions (mm)	23 x 10.15 x 1.1
Typical Applications	Air intake of combustion engine, spirometer, industrial gas flow



### MEAS LMM-H04

Package	Hybrid
Type	<ul style="list-style-type: none"> <li>Hot film anemometer component</li> <li>Unidirectional</li> </ul>
Operating Temp.	-40°C to 125°C
Unique Features	High sensitivity at low heater temperatures, fast response time, true air temperature sensor
Calibration / Accuracy	Dependent on electronics
Dimensions (mm)	24 x 10.15 x 1.1
Typical Applications	Air intake of combustion engine, spirometer, industrial gas flow

## FLOW SWITCHES



### MEAS FS-01

Package	Noryl®
Type	Flow switch for direction of liquid and gas flow
Max. Pressure	10 bar at 20°C
Operating Temp.	-30°C to 85°C
Unique Features	Triac, normally open, close on flow
Dimensions (mm)	106 x 32 x 32
Typical Applications	Mains water control, power shower, central heating systems, circulation pump protection, cooling systems



### MEAS FS-02

Package	Noryl®
Type	Flow switch for direction of liquid and gas flow
Max. Pressure	10 bar at 20°C
Operating Temp.	-30°C to 85°C
Unique Features	SPST reed switch, normally open, close on flow
Dimensions (mm)	106 x 32 x 32
Typical Applications	Mains water control, power shower, central heating systems, circulation pump protection, cooling systems



### MEAS FS-05

Package	Brass
Type	Flow switch for direction of liquid and gas flow
Max. Pressure	10 bar at 20°C
Operating Temp.	-30°C to 100°C
Unique Features	Triac, normally open, close on flow
Dimensions (mm)	113 x 53 x 36
Typical Applications	Mains water control, power shower, central heating systems, circulation pump protection, cooling systems



### MEAS FS-06

Package	Brass
Type	Flow switch for direction of liquid and gas flow
Max. Pressure	10 bar at 20°C
Operating Temp.	-30°C to 100°C
Unique Features	SPST reed switch, normally open, close on flow
Dimensions (mm)	113 x 53 x 36
Typical Applications	Mains water control, power shower, central heating systems, circulation pump protection, cooling systems



### MEAS FS-90/1

Package	Copper
Type	Flow switch for direction of liquid and gas flow
Max. Pressure	10 bar at 20°C
Operating Temp.	-30°C to 85°C
Unique Features	SPST reed switch, normally open, close on flow
Dimensions (mm)	153 x 25 x 15
Typical Applications	Leak detection, flow sensing, mains water control, cooling systems, circulation pump protection

# FLUID PROPERTY SENSORS

We offer distinct technologies to measure fluids. Our tuning fork technology is coupled with efficient software algorithms for accurate measurement of viscosity, density and dielectric constant. Dedicated applications include oils (engine, hydraulic, transmission), fuels, fluid monitoring, and others. Our urea quality sensors, based on Near Infra-Red (NIR) technology or ultrasonic measurement perform an analysis of the Diesel Exhaust Fluid (DEF) fluid to provide urea concentration and secure misfilling protection to the Selective Catalytic Reduction (SCR) systems. Our highly reliable reed switch technology is combined with temperature measurement for level sensing. Robust design enables fluid property sensors to operate under diverse pressure, flow and temperature conditions to bring real-time fluid monitoring to engines, fuel systems, SCR systems, compressors, transmissions, gear boxes and many other industrial applications. Our new water-in-oil measurement sensor supplements the existing fluid quality range of products.





## DEF FLS SENSORS

DEF Level Sensors



### FLS RB Series

**Package** Rubber header and stainless steel body

**Type** Combined level sensor, temperature sensor, filter, DEF draw and return heater, collar header

**Operating Temp.** -40°C to 85°C

**Features**

- Available in a range of sizes
- High reliability
- Reed switch technology
- Using coolant system to thaw frozen tank
- DEF feed and return connections can be incorporated into the header
- Various collar adapter options



### FLS RC Series

**Package** Rubber header and stainless steel body

**Type** Combined level sensor, temperature sensor, filter, DEF draw and return heater, bayonet header

**Operating Temp.** -40°C to 85°C

**Features**

- Available in a range of sizes
- High reliability
- Reed switch technology
- Using coolant system to thaw frozen tank
- DEF feed and return connections can be incorporated into the header



### FLS P Series

**Package** Plastic header and stainless steel body

**Type** Combined level sensor, temperature sensor

**Operating Temp.** -40°C to 85°C

**Features**

- Available in a range of sizes
- High reliability
- Reed switch technology



### FLS PU Series

**Package** Plastic header and stainless steel body

**Type** Combined level sensor, temperature sensor, filter, DEF draw and return heater, bayonet header

**Operating Temp.** -40°C to 85°C

**Features**

- Available in a range of sizes
- High reliability
- Reed switch technology
- Using coolant system to thaw frozen tank
- DEF feed and return connections can be incorporated into the header



### AHM/L FLS AHM/L Series

**Package** Rubber header and stainless steel body

**Type** Combined level sensor, temperature sensor, filter, DEF draw and return heater, collar header

**Operating Temp.** -40°C to 85°C

**Features**

- Available in a range of sizes
- High reliability
- Reed switch technology
- Using coolant system to thaw frozen tank
- DEF feed and return connections can be incorporated into the header
- Various collar adapter options



### TZS FLS TZS/I Series

**Package** Plastic header and stainless steel body

**Type** Combined level sensor, temperature sensor, filter, DEF draw and return heater, bayonet header

**Operating Temp.** -40°C to 85°C

**Features**

- Available in a range of sizes
- High reliability
- Reed switch technology
- Using coolant system to thaw frozen tank
- DEF feed and return connections can be incorporated into the header



### TKD FLS TZS/I Series

**Package** Plastic header and stainless steel body

**Type** Combined level sensor, temperature sensor, filter, DEF draw and return heater, SAE locking ring header

**Operating Temp.** -40°C to 85°C

**Features**

- Available in a range of sizes
- High reliability
- Reed switch technology
- Using coolant system to thaw frozen tank
- DEF feed and return connections can be incorporated

## DEF SCR SENSORS

DEF Level Quality Sensors



### QLS RB Series

<b>Package</b>	Rubber header and stainless steel body
<b>Type</b>	Combined level sensor with quality measurement, temperature sensor, filter, DEF draw and return heater, collar header
<b>Operating Temp.</b>	-40°C to 85°C
<b>Operating Range</b>	0% to 62.5% mass urea
<b>Urea Concentration Accuracy</b>	±2%
<b>Features</b>	<ul style="list-style-type: none"> <li>• Available in a range of sizes</li> <li>• High reliability</li> <li>• Reed switch technology</li> <li>• Using coolant system to thaw frozen tank</li> <li>• DEF feed and return connections can be incorporated into the header</li> <li>• Integrated quality sensor</li> <li>• Various collar adapter options</li> </ul>



### QLS RC Series

<b>Package</b>	Rubber header and stainless steel body
<b>Type</b>	Combined level sensor with quality measurement, temperature sensor, filter, DEF draw and return heater, bayonet header
<b>Operating Temp.</b>	-40°C to 85°C
<b>Operating Range</b>	0% to 62.5% mass urea
<b>Urea Concentration Accuracy</b>	±2%
<b>Features</b>	<ul style="list-style-type: none"> <li>• Available in a range of sizes</li> <li>• High reliability</li> <li>• Reed switch technology</li> <li>• Using coolant system to thaw frozen tank</li> <li>• DEF feed and return connections can be incorporated into the header</li> <li>• Integrated quality sensor</li> </ul>



### QLS PL Series

<b>Package</b>	Plastic header and stainless steel body
<b>Type</b>	Combined level sensor with quality measurement, temperature sensor, filter, DEF draw and return heater, screwed header
<b>Operating Temp.</b>	-40°C to 85°C
<b>Operating Range</b>	0% to 62.5% mass urea
<b>Urea Concentration Accuracy</b>	±2%
<b>Features</b>	<ul style="list-style-type: none"> <li>• Available in a range of sizes</li> <li>• Foot options (Compact, normal and extended sizes)</li> <li>• High reliability</li> <li>• Reed switch technology</li> <li>• Using coolant system to thaw frozen tank</li> <li>• DEF feed and return connections can be incorporated into the header</li> <li>• Integrated quality sensor</li> <li>• Bayonet adaptor option</li> </ul>



### AHUQ QLS AHM Series

<b>Package</b>	Rubber header and stainless steel body
<b>Type</b>	Combined level sensor, temperature sensor, filter, DEF draw and return heater, collar header
<b>Operating Temp.</b>	-40°C to 85°C
<b>Urea Concentration Accuracy</b>	±1% at -6°C to 55°C
<b>Features</b>	<ul style="list-style-type: none"> <li>• Available in a range of sizes</li> <li>• High reliability</li> <li>• Reed switch technology</li> <li>• Using coolant system to thaw frozen DEF feed and return connections can be incorporated into the header</li> <li>• Integrated quality sensor</li> <li>• Various collar adapter options</li> </ul>



### TZLQ QLS TZS/L Series

<b>Package</b>	Plastic header and stainless steel body
<b>Type</b>	Combined level sensor with quality measurement, temperature sensor, filter, draw and return heater, bayonet header
<b>Operating Temp.</b>	-6°C to 55°C
<b>Urea Concentration Accuracy</b>	±1% at -6°C to 55°C
<b>Features</b>	<ul style="list-style-type: none"> <li>• Available in a range of sizes</li> <li>• Foot options (Compact, normal and extended sizes)</li> <li>• High reliability</li> <li>• Reed switch technology</li> <li>• Using coolant system to thaw frozen</li> <li>• DEF feed and return connections can be incorporated into the header</li> <li>• Integrated quality sensor</li> </ul>

## FLUID PROPERTY SENSORS



### MEAS FPS2800

Package	Fully integrated, stand-alone module combines sensor and processing electronics for in-situ monitoring
Type	Engine oil quality sensor
Operating Range	Viscosity from 0.5 to 50 mPa-s Density from 0.65 to 1.5 g/cc Dielectric from 1.0 to 6.0
Operating Temp.	-40°C to 150°C
Unique Features	<ul style="list-style-type: none"><li>• Rugged construction for high pressure and high flow environments</li><li>• CAN communication protocol (SAEJ1939 compliant)</li></ul>
Calibration	Factory calibrated with NIST traceable standards
Dimensions (mm)	73.3 x 30 x 30
Typical Applications	Lubricating oil quality for industrial and commercial vehicles

# FORCE SENSORS

We are a pioneer in the design and manufacture of precision force sensors for applications that require high performance or unique packaging, including electromechanical flight control, test and measurement and ultra-low cost OEM load cells for medium to high volumes. Based on our proprietary piezoresistive silicon strain gage (Microfused) technology, our sensors combine durability and long-term stability in extremely low cost packages. Our flight-qualified sensors monitor secondary load path engagement and supply real-time information from primary flight control forces to the flight data recorder (Black Box). Other applications include force feedback for the autopilot automatic disconnect function and flap jam detection systems. Our OEM and Test and Measurement (T&M) load cells offer custom packaging and electronics with analog or digital outputs, suited for both low and high force environments.



## LOAD CELLS

Low Cost OEM



### MEAS FX19

<b>Package</b>	Low profile "coin cell" design
<b>Operating Mode</b>	Compression
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Ultra low cost, low strain design</li> <li>• Essentially unlimited cycle life</li> </ul>
<b>Ranges (Lbf)</b>	10, 25, 50, 100
<b>Max. Over-range</b>	2.5X
<b>Output / Span</b>	100 mV
<b>Combined Linearity &amp; Hysteresis</b>	±1.0% FSO
<b>Operating Temp.</b>	-40°C to 85°C
<b>Dimensions (mm)</b>	Ø25.00 x 29.50 x 8.00
<b>Typical Applications</b>	Consumer OEM, exercise machines, physical therapy, vending machines, appliances, pumps, medical devices



### MEAS FS19

<b>Package</b>	Stainless steel housing with flexible PCB
<b>Operating Mode</b>	Compression
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Low cost</li> <li>• Small size and light weight</li> </ul>
<b>Ranges (Lbf)</b>	1, 2, 4, 6
<b>Max. Over-range</b>	2X
<b>Output / Span</b>	100 mV
<b>Combined Linearity &amp; Hysteresis</b>	±1% FSO
<b>Operating Temp.</b>	0°C to 40°C
<b>Dimensions (mm)</b>	Ø9.5 x 3.45
<b>Typical Applications</b>	Infusion pump, load sensing, contact sensing, weighing, household appliances



### MEAS FS20

<b>Package</b>	Miniature; drop in replacement for industry standard
<b>Operating Mode</b>	Compression
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Load cell design operates at very low strains</li> <li>• Not subject to lead die fatigue</li> </ul>
<b>Ranges (Lbf)</b>	1.5, 3
<b>Max. Over-range</b>	10 lbf
<b>Output / Span</b>	1.0 to 4.0 V
<b>Combined Linearity &amp; Hysteresis</b>	±1.0% FSO
<b>Operating Temp.</b>	0°C to 70°C
<b>Dimensions (mm)</b>	30.708 x 17.272 x 8.255
<b>Typical Applications</b>	Infusion pumps, contact sensing, medical devices, consumer appliances



### MEAS FC22

<b>Package</b>	Plastic housing, button, flange mounting
<b>Operating Mode</b>	Compression
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Low cost button shape</li> <li>• Essentially unlimited cycle life</li> </ul>
<b>Ranges (Lbf)</b>	25, 50, 100
<b>Max. Over-range</b>	2.5X
<b>Output / Span</b>	100 mV, 0.5 to 4.5 VDC
<b>Combined Linearity &amp; Hysteresis</b>	±1.0% FSO
<b>Operating Temp.</b>	-40°C to 85°C
<b>Dimensions (mm)</b>	Ø26.00 x 42.00 x 19.50
<b>Typical Applications</b>	Infusion pumps, robotics end-effectors, exercise machines, contact sensing, appliances



### MEAS FC23

<b>Package</b>	Stainless steel housing button shape for higher weight loads
<b>Operating Mode</b>	Compression
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Industry standard low profile all stainless steel design</li> <li>• Resistant to off-axis loads</li> </ul>
<b>Ranges (Lbf)</b>	250, 500, 1,000, 2,000
<b>Max. Over-range</b>	1.5X and 2.5X
<b>Output / Span</b>	100 mV
<b>Combined Linearity &amp; Hysteresis</b>	±1.0% FSO
<b>Operating Temp.</b>	-40°C to 85°C
<b>Dimensions (mm)</b>	Ø31.75 x 10.20
<b>Typical Applications</b>	Batch weighing, robotics, assembly line force, printing presses, pumps, winch and hoist

## LOAD CELLS

### Standard



#### MEAS ELHM, ELHS

<b>Package</b>	High capacity dual stud or button style
<b>Operating Mode</b>	Tension and compression
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>Tension and compression or compression only</li> <li>High stability metal foil strain gage (ELHM)</li> <li>High output semiconductor strain gage (ELHS)</li> <li>NIST traceable calibration provided</li> </ul>
<b>Ranges N (Lbf)</b>	1K to 50K (200 to 10K)
<b>Max. Over-range</b>	1.5X FS
<b>Output / Span</b>	10 mV (ELHM) 200 mV FSO (ELHS)
<b>Non-linearity</b>	0.3% to 0.5% FSO
<b>Hysteresis</b>	Combined with linearity
<b>Optional Operating Temp.</b>	-50°C to 120°C (ELHM), -20°C to 80°C (ELHS)
<b>Dimensions (mm)</b>	Application dependent
<b>Typical Applications</b>	Robust general purpose, low deflection design, machine tool, linkage forces



#### MEAS FN1010

<b>Package</b>	Load pin design
<b>Operating Mode</b>	Tension and compression
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>Keyed anti-rotation slot</li> <li>Bidirectional available</li> <li>Optional watertight construction</li> </ul>
<b>Ranges N (Lbf)</b>	10K to 2K (2K to 400K)
<b>Max. Over-range</b>	1.5X FS
<b>Output / Span</b>	±20 mV (4 V; ±5 V; 4 - 20 mA optional)
<b>Non-linearity</b>	±1% FS
<b>Hysteresis</b>	Combined with linearity
<b>Optional Operating Temp.</b>	-20°C to 80°C
<b>Dimensions (mm)</b>	Application dependent
<b>Typical Applications</b>	Crane monitoring, offshore, load-limited devices



#### MEAS FN3002

<b>Package</b>	Very high capacity dual stud
<b>Operating Mode</b>	Tension and compression
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>Threaded male fitting</li> <li>Integrated amplifier</li> <li>Optional rod end</li> </ul>
<b>Ranges N (Lbf)</b>	10K to 2K (2K to 400K)
<b>Max. Over-range</b>	1.5X FS
<b>Output / Span</b>	±20 mV (4 V; ±5 V optional)
<b>Non-linearity</b>	±0.25% FS
<b>Hysteresis</b>	Combined with linearity
<b>Optional Operating Temp.</b>	-40°C to 150°C
<b>Dimensions (mm)</b>	Application dependent
<b>Typical Applications</b>	Assembly forces, tool force, offshore



#### MEAS FN2420

<b>Package</b>	Very high capacity load button
<b>Operating Mode</b>	Compression
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>High stiffness</li> <li>Optional load button</li> <li>Optional high level output module</li> </ul>
<b>Ranges N (Lbf)</b>	20K to 5K (4K to 1K)
<b>Max. Over-range</b>	1.5X FS
<b>Output / Span</b>	20 mV (4 V; 5 V)
<b>Non-linearity</b>	±0.25% FS
<b>Hysteresis</b>	Combined with linearity
<b>Optional Operating Temp.</b>	-40°C to 150°C
<b>Dimensions (mm)</b>	Application dependent
<b>Typical Applications</b>	Calibration presses, robotics and effectors, laboratory and research

### Test and Measurement Miniature



#### MEAS ELAF

<b>Package</b>	Button, dual stud
<b>Operating Mode</b>	Tension and compression
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>Low cost</li> <li>Small, low profile design</li> <li>Low off-axis response</li> <li>NIST traceable calibration provided</li> </ul>
<b>Ranges N (Lbf)</b>	50 to 10K (10 to 2K)
<b>Max. Over-range</b>	2.5X FS
<b>Output / Span</b>	100 mV (0.5 - 4.5 V optional)
<b>Non-linearity</b>	±0.25% FS
<b>Hysteresis</b>	±0.25% FS
<b>Optional Operating Temp.</b>	-40°C to 120°C
<b>Dimensions (mm)</b>	Ø12.70 x 9.53 or 8.80 Ø15.88 x 12.70 or 11.70 Ø31.75 x 10.20
<b>Typical Applications</b>	Theatrical rigging loads, assembly forces, weighing, thrust measurements, product validation testing



#### MEAS XFC200R

<b>Package</b>	Small diameter load button
<b>Operating Mode</b>	Compression
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>High stiffness</li> <li>High overload capacity</li> <li>Static and dynamic</li> </ul>
<b>Ranges N (Lbf)</b>	2 to 10K (0.4 to 2K)
<b>Max. Over-range</b>	2X to 4X FS
<b>Output / Span</b>	100 mV
<b>Non-linearity</b>	≤ ±0.5% FS
<b>Hysteresis</b>	≤ ±0.5% FS
<b>Optional Operating Temp.</b>	-40°C to 150°C
<b>Dimensions (mm)</b>	Ø10 to Ø16
<b>Typical Applications</b>	Material test, measuring tools, robotics and effectors



#### MEAS XFL212R

<b>Package</b>	Low profile load button
<b>Operating Mode</b>	Compression
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>Extremely flat</li> <li>Integrated load button</li> <li>Small diameter</li> </ul>
<b>Ranges N (Lbf)</b>	5 to 500 (1 to 100)
<b>Max. Over-range</b>	2X FS
<b>Output / Span</b>	100 mV
<b>Non-linearity</b>	≤ ±0.5% FS
<b>Hysteresis</b>	≤ ±0.5% FS
<b>Optional Operating Temp.</b>	-40°C to 150°C
<b>Dimensions (mm)</b>	Ø12.5 x 3.5
<b>Typical Applications</b>	Dental and biomechanical, surface mount assembly system, production validation test



#### MEAS XFTC300 Series

<b>Package</b>	Low/high capacity dual stud
<b>Operating Mode</b>	Tension and compression
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>High stiffness</li> <li>High overload capacity</li> <li>Threaded male / female fitting</li> </ul>
<b>Ranges N (Lbf)</b>	2 to 2K (0.4 to 400)
<b>Max. Over-range</b>	2X to 4X FS
<b>Output / Span</b>	100 mV (4 V; ±5 V optional)
<b>Non-linearity</b>	≤ ±0.5% FS
<b>Hysteresis</b>	≤ ±0.5% FS
<b>Optional Operating Temp.</b>	-40°C to 150°C
<b>Dimensions (mm)</b>	Application dependent
<b>Typical Applications</b>	Material test, tool forces, robotics end effectors

## LOAD CELLS

### S-Beam Standard



**MEAS FN3030**

<b>Package</b>	S-beam
<b>Operating Mode</b>	Tension and compression
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Optional rod ends</li> <li>• Optional high level output</li> <li>• Optional high compensation temperature</li> </ul>
<b>Ranges N (Lbf)</b>	50 to 100K (10 to 20K)
<b>Max. Over-range</b>	1.5X FS
<b>Output / Span</b>	±20 mV (4 V; ±5 V optional)
<b>Non-linearity</b>	±0.1% FS
<b>Optional Operating Temp.</b>	-40°C to 150°C
<b>Dimensions (mm)</b>	Application dependent
<b>Typical Applications</b>	Laboratory and research, process control, customized options



**MEAS FN9620**

<b>Package</b>	S-beam
<b>Operating Mode</b>	Tension and compression
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• High accuracy</li> <li>• IP68</li> <li>• Entry level</li> </ul>
<b>Ranges N (Lbf)</b>	500 to 10K (100 to 2K)
<b>Max. Over-range</b>	1.5X FS
<b>Output / Span</b>	±10 mV to ±20 mV
<b>Non-linearity</b>	±0.05% FS
<b>Optional Operating Temp.</b>	-40 to 90°C
<b>Dimensions (mm)</b>	56 x 20 x 60
<b>Typical Applications</b>	Test bed, dynamic fatigue testing, robotics and effectors



**MEAS FN3148**

<b>Package</b>	S-beam with stops
<b>Operating Mode</b>	Tension and compression
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Very high accuracy</li> <li>• High resolution</li> <li>• Mechanical stops</li> </ul>
<b>Ranges N (Lbf)</b>	10 to 2K (2 to 400)
<b>Max. Over-range</b>	5X to 100X FS
<b>Output / Span</b>	±20 mV (4 V; ±5 V optional)
<b>Non-linearity</b>	< ±0.05% FS
<b>Optional Operating Temp.</b>	-40°C to 120°C
<b>Dimensions (mm)</b>	Application dependent
<b>Typical Applications</b>	Product validation tests, medical instruments, weighing



**MEAS FN7110**

<b>Package</b>	Dual S-beam range
<b>Operating Mode</b>	Tension and compression
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• High resolution</li> <li>• Optional high level output</li> <li>• Double range</li> </ul>
<b>Ranges N (Lbf)</b>	10, 100 to 1K, 10K (2, 20 to 200, 2K)
<b>Max. Over-range</b>	1.2X FS of the higher range
<b>Output / Span</b>	±20 mV (4 V; ±5 V optional)
<b>Non-linearity</b>	±0.1% FS of each range
<b>Optional Operating Temp.</b>	-20°C to 80°C
<b>Dimensions (mm)</b>	60 x 30 x 100
<b>Typical Applications</b>	Product validation tests, process control, robotics and effectors

### Low Profile and Pan-cake



**MEAS FMT**

<b>Package</b>	Washer
<b>Operating Mode</b>	Compression
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• High stiffness</li> <li>• 1.5X over-range</li> <li>• High temperature</li> </ul>
<b>Ranges N (Lbf)</b>	20K to 320K (4K to 64K)
<b>Max. Over-range</b>	1.5X FS
<b>Output / Span</b>	15 to 20 mV
<b>Non-linearity</b>	1 to 5% FS
<b>Hysteresis</b>	Combined with linearity
<b>Optional Operating Temp.</b>	-40°C to 150°C
<b>Dimensions (mm)</b>	Application dependent
<b>Typical Applications</b>	Robotics, process control, bolt clamping for bridges



**MEAS FN3050, FN3000**

<b>Package</b>	Pan-cake
<b>Operating Mode</b>	Tension and compression
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• High stability</li> <li>• All FN3050 have same housing</li> <li>• Optional high level output</li> </ul>
<b>Ranges N (Lbf)</b>	100 to 1000K (20 to 200K)
<b>Max. Over-range</b>	1.5X FS (10X FS with stops)
<b>Output / Span</b>	15 to 20 mV (4 V; ±5 V optional)
<b>Non-linearity</b>	±0.1% FS
<b>Hysteresis</b>	±0.1% FS
<b>Optional Operating Temp.</b>	-40°C to 150 °C
<b>Dimensions (mm)</b>	Application dependent
<b>Typical Applications</b>	Static fatigue tests, laboratory and research, robotics



**MEAS FN9630, FN9635**

<b>Package</b>	Very high accuracy pan-cake
<b>Operating Mode</b>	Tension and compression
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• High stability</li> <li>• High accuracy</li> <li>• Minimal cross effect</li> <li>• Connection flange supplied (FN9635)</li> </ul>
<b>Ranges N (Lbf)</b>	10K to 200K (2K to 40K)
<b>Max. Over-range</b>	1.5 x FS
<b>Output / Span</b>	20 mV
<b>Non-linearity</b>	±0.08% FS
<b>Hysteresis</b>	±0.08% FS
<b>Optional Operating Temp.</b>	-40°C to 90°C
<b>Dimensions (mm)</b>	Application dependent
<b>Typical Applications</b>	Static fatigue tests, weighing calibration, robotics



**MEAS FN7325**

<b>Package</b>	Custom design and ranges available upon request
<b>Operating Mode</b>	Multi-axial force and torque
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Measures load and torque in 3 directions</li> <li>• Fatigue rated</li> <li>• Minimal cross effects</li> </ul>
<b>Ranges N (Lbf)</b>	5K to 250K (1K to 50K)
<b>Max. Over-range</b>	1.2X FS
<b>Output / Span</b>	±100 to 150 mV (4 V; ±5 V optional)
<b>Non-linearity</b>	±1% FS
<b>Hysteresis</b>	Combined with linearity
<b>Optional Operating Temp.</b>	-20°C to 80°C
<b>Dimensions (mm)</b>	Application dependent
<b>Typical Applications</b>	Structure testing, crash testing, industrial test benches

## AUTOMOTIVE DESIGN AND TEST SENSORS



### MEAS FN4055

Package	Seat belt sensor
Operating Mode	Tension
Unique Features	<ul style="list-style-type: none"> <li>• Low operating ranges</li> <li>• Protected against overload</li> <li>• Compatible with most seat belts</li> </ul>
Ranges N (Lbf)	100 to 300N (20 to 60)
Max. Over-range	5X FS
Output / Span	20 mV
Non-linearity	±0.25% FS
Hysteresis	Combined with linearity
Optional Operating Temp.	-40 to 120 °C
Dimensions (mm)	63.5 x 63.5 x 12.7
Typical Applications	Auto crash testing, tension at the belt receptacle



### MEAS FN4070, FN4080

Package	Seat belt buckle sensor
Operating Mode	Tension
Unique Features	<ul style="list-style-type: none"> <li>• High operating ranges</li> <li>• Detachable tongue and cable</li> <li>• Compatible with most seat belts</li> </ul>
Ranges N (Lbf)	250 to 50K (50 to 10K)
Max. Over-range	1.5X FS
Output / Span	15 to 20 mV
Non-linearity	±0.5% FS
Hysteresis	Combined with linearity
Optional Operating Temp.	-20°C to 80°C
Dimensions (mm)	Application dependent
Typical Applications	Auto crash testing, tension at the belt receptacle



### MEAS FN2317

Package	Hand brake
Operating Mode	Compression
Unique Features	<ul style="list-style-type: none"> <li>• Easily installed</li> <li>• Ergonomic design</li> <li>• Fits most vehicles</li> </ul>
Ranges N (Lbf)	500 to 1K (100 to 200)
Max. Over-range	1.5X FS
Output / Span	±20 mV (4 V optional)
Non-linearity	±0.5% FS
Hysteresis	Combined with linearity
Optional Operating Temp.	-20°C to 80°C
Dimensions (mm)	100 x 20 x 15
Typical Applications	Hand brake, test bed



### MEAS FN2114, FN2570

Package	Brake pedal
Operating Mode	Compression
Unique Features	<ul style="list-style-type: none"> <li>• High accuracy</li> <li>• Extra flat</li> <li>• Compact</li> <li>• Rugged design</li> </ul>
Ranges N (Lbf)	200 to 3K (40 to 600)
Max. Over-range	1.5X FS
Output / Span	15 to 20 mV (4 V optional)
Non-linearity	< ±1% FS (FN2114) < ±2.5% FS (FN2570)
Hysteresis	Combined with linearity
Optional Operating Temp.	-20°C to 80°C
Dimensions (mm)	Application dependent
Typical Applications	Brake pedal, clutch pedal, test bed



### MEAS FN7080

Package	Gear stick design
Operating Mode	Multi-axial
Unique Features	<ul style="list-style-type: none"> <li>• Measures force in three directions</li> <li>• Replaces gear knob</li> <li>• Ease of mounting</li> </ul>
Ranges N (Lbf)	50 to 500 (10 to 100)
Max. Over-range	1.2X FS
Output / Span	±7.5 mV (4 V; ±5 V optional)
Non-linearity	< ±0.3% FS
Hysteresis	Combined with linearity
Optional Operating Temp.	-20°C to 80°C
Dimensions (mm)	Ø25 spherical
Typical Applications	Change gear force measurement, roughness of material



### MEAS FCA7300

Package	Steering wheel adaptable
Operating Mode	Multi-sensing
Unique Features	<ul style="list-style-type: none"> <li>• Dual torque and angle range</li> <li>• Steering velocity measurement</li> <li>• Fits all road vehicles</li> </ul>
Ranges N (Lbf)	10 to 200 Nm (7 lbf-ft to 150 lbf-ft)
Max. Over-range	10X FS
Output / Span	±10 V
Non-linearity	±0.1% FS
Hysteresis	±0.1% FS
Optional Operating Temp.	-20°C to 80°C
Dimensions (mm)	Ø195 x 50
Typical Applications	On car road test, truck and buses steering test, armored vehicles steering test



### MEAS EL20-S458

Package	Special purpose design optimized for automotive crash test environments
Operating Mode	Seat belt tension
Unique Features	<ul style="list-style-type: none"> <li>• Low mass titanium design for use in high shock environments</li> <li>• Mass optimized to minimize acceleration induced errors during SAE J2570 ATD and ISO 6487</li> <li>• Optional high level and linearized outputs</li> <li>• Smoothed edge design and optional slotted titanium axles eliminate drag errors and dummy damage</li> <li>• Ultra robust cable is user replaceable</li> </ul>
Ranges N (Lbf)	5K and 15K (1,000 and 3,200)
Max. Over-range	2X
Output / Span	10 mV (0.5 to 4.5 V optional)
Non-linearity	1.0% to 3.0% FSO.
Hysteresis	Combined with linearity
Optional Operating Temp.	-40°C to 120°C
Dimensions (mm)	Application dependent
Typical Applications	Seat belt forces, safety and restraint system crash test, parachute tether and riser forces



## ELECTRONICS / DISPLAYS



### MEAS ARD154

<b>Package</b>	Din rail mountable
<b>Operating Mode</b>	Signal conditioning for wheatstone bridge sensors
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Suited for full bridge strain gage sensors</li> <li>• 120 to 10,000 Ohm bridge impedance</li> <li>• ±10 V analog or 0/4 to 20 mA current output</li> <li>• 2 kHz or 20 kHz max. bandwidth</li> <li>• Calibration pushbutton from 0.1 to 10 mV/V</li> </ul>
<b>Ranges N (Lbf)</b>	Application dependent
<b>Output / Span</b>	±10 V max.; 4 to 20 mA or 0 to 20 mA
<b>Accuracy</b>	0.01% FS
<b>Optional Operating Temp.</b>	-10°C to 60°C
<b>Dimensions (mm)</b>	99 x 17.5 x 112
<b>Typical Applications</b>	Test stands, power plants, manufacturing systems, test and measurement, test bed regulation, automat interfaces



### MEAS CPA150

<b>Package</b>	Hand held indicator
<b>Operating Mode</b>	Portable display suited for strain gage type sensors
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Suited for 1 or 2 sensors</li> <li>• 7½ digits (±9999999)</li> <li>• Front panel programming</li> <li>• 45 hour life battery</li> <li>• Calibration pushbutton from 0.1 to 10 mV/V</li> </ul>
<b>Ranges N (Lbf)</b>	Application dependent
<b>Output / Span</b>	Display only
<b>Accuracy</b>	± 0.005% FS
<b>Optional Operating Temp.</b>	-10°C to 50°C
<b>Dimensions (mm)</b>	90 x 34 x 152 (3.54 x 1.34 x 5.98)
<b>Typical Applications</b>	Outdoor punctual measurements, test and measurement, portable calibration device



### MEAS M210

<b>Package</b>	Front panel or housed in case
<b>Operating Mode</b>	Signal conditioning and display meter
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Analog output: ±10 V</li> <li>• Red LED display: ±2,000 count</li> <li>• High bandwidth: 1,000 Hz at -3 dB</li> <li>• Low noise level</li> </ul>
<b>Ranges N (Lbf)</b>	Application dependent
<b>Output / Span</b>	±10 VDC
<b>Accuracy</b>	±0.05% FS
<b>Optional Operating Temp.</b>	0°C to 50°C
<b>Dimensions (mm)</b>	96 x 48 x 155
<b>Typical Applications</b>	High bandwidth test bed display, monitoring, laboratory and research, process control equipment



### MEAS M905

<b>Package</b>	Front panel or housed in case
<b>Operating Mode</b>	Display suited for process or strain gage type sensors
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Suited for process or strain gage type sensors</li> <li>• 5 digits: -19999 to 19999</li> <li>• Front panel programming</li> <li>• 11 point scaling</li> <li>• Plug-in option boards</li> </ul>
<b>Ranges N (Lbf)</b>	Application dependent
<b>Output / Span</b>	±10 VDC or 4 to 20 mA with option
<b>Accuracy</b>	±15 bits, 20 sample/sec
<b>Optional Operating Temp.</b>	-10°C to 60°C
<b>Dimensions (mm)</b>	96 x 48 x 60
<b>Typical Applications</b>	Display on test bed, monitoring, laboratory and research

# HUMIDITY SENSORS

We offer a complete range of calibrated and amplified products that measure relative humidity (RH). Based on our robust patented capacitive technology, these sensors provide accurate measurement of dew point and absolute humidity by combining relative humidity and temperature measurements. Our sensors are qualified for the most demanding applications, including automotive, heavy truck, aerospace and home appliances. We offer a variety of output signals such as digital (Frequency, I<sup>2</sup>C) and analog voltage, as well as, customized and proprietary output signals including PWM, PDM, LIN and CAN.



## HUMIDITY AND TEMPERATURE (NTC) COMPONENTS

### Analog Output



#### MEAS HS1101LF

Package	Through hole TO39 with side opening plastic cap
Type	Capacitive humidity
Operating RH Range	0 to 100% RH
Operating Temp.	-60°C to 140°C
Unique Features	<ul style="list-style-type: none"> <li>• Robust and recognized component</li> <li>• Suitable for most humidity applications</li> <li>• Cost effective solution</li> </ul>
Accuracy	180 pF, $\pm 3$ pF at 55% RH
Dimensions (mm)	10 x 10 x 19
Typical Applications	Applications requiring a robust humidity sensor in automotive, home appliance, outdoor, HVACR, consumer, printer, meteorology

### Digital Output



#### MEAS HTU2X Series

Package	DFN type
Type	Digital RH and NTC temperature
Operating RH Range	0 to 100% RH
Operating Temp.	-40°C to 125°C
Unique Features	<ul style="list-style-type: none"> <li>• Low power consumption</li> <li>• Fast response time</li> <li>• Very low temperature coefficient</li> <li>• I<sup>2</sup>C interface or PWM interface or SDM interface</li> </ul>
Accuracy	$\pm 3\%$ RH at 25°C (10 to 95% RH) $\pm 0.3^\circ\text{C}$ at 25°C
Dimensions (mm)	3.0 x 3.0 x 1.0
Typical Applications	Humidity and temperature plug and play transducers for OEM demanding applications in automotive, home appliance, printer, medical, humidifier



#### MEAS HTU2XF Series

Package	DFN type
Type	Digital RH and NTC temperature
Operating RH Range	0 to 100% RH
Operating Temp.	-40°C to 125°C
Unique Features	<ul style="list-style-type: none"> <li>• Low power consumption</li> <li>• Fast response time</li> <li>• Very low temperature coefficient</li> <li>• I<sup>2</sup>C interface or PWM interface or SDM interface</li> <li>• Optimal filter</li> </ul>
Accuracy	$\pm 3\%$ RH at 25°C (10 to 95% RH) $\pm 0.3^\circ\text{C}$ at 25°C
Dimensions (mm)	3.0 x 3.0 x 1.0
Typical Applications	Humidity and temperature plug and play transducers for OEM demanding applications in automotive, home appliance, printer, medical, humidifier

## HUMIDITY AND TEMPERATURE (NTC) MINI-MODULES

### Analog Voltage and Digital Output



#### MEAS HTU3535PVBM/Wire

Package	Cost effective, small size mini-module
Type	Analog voltage RH and NTC temperature
Operating RH Range	0 to 100% RH
Operating Temp.	-40°C to 110°C
Unique Features	<ul style="list-style-type: none"> <li>• PTFE filter (Optional)</li> <li>• Electronics fully protected (5 V)</li> <li>• Multiple connector choices (JST, Samtec board to board through hole)</li> <li>• Based on HTU21</li> </ul>
Calibration	$\pm 3\%$ RH at 55% RH; $\pm 0.25^\circ\text{C}$ at 25°C
Dimensions (mm)	27 x 11.9 x YY (Depending on the connector, from 6 to 10.8 mm length)
Typical Applications	Humidity and temperature plug and play transducers for OEM demanding applications in HVACR, home appliance, printer, medical, and outdoor



#### MEAS HTU383X/Wire

Package	Cost effective small size mini-module
Type	Digital RH and NTC temperature
Operating RH Range	0 to 100% RH
Operating Temp.	-40°C to 110°C
Unique Features	<ul style="list-style-type: none"> <li>• PTFE filter (Optional)</li> <li>• Electronics fully protected (5 V)</li> <li>• Multiple connector choices (JST, Samtec board to board through hole)</li> <li>• Based on HTU21</li> </ul>
Calibration	$\pm 3\%$ RH at 55% RH; $\pm 0.25^\circ\text{C}$ at 25°C
Dimensions (mm)	27 x 11.9 x YY (Depending on the connector, from 6 to 10.8 mm length)
Typical Applications	Humidity and temperature plug and play transducers for OEM demanding applications in HVACR, home appliance, printer, medical, and outdoor



#### MEAS HTG351xCH

Package	Cost effective small size mini-module
Type	Analog voltage RH and NTC temperature
Operating RH Range	0 to 100% RH
Operating Temp.	-40°C to 110°C
Unique Features	<ul style="list-style-type: none"> <li>• Electronics fully protected with potting material (3.3 V or 5 V)</li> <li>• Multiple connector choices (JST, Samtec board to board through hole)</li> </ul>
Calibration	$\pm 3\%$ RH at 55% RH; $\pm 0.25^\circ\text{C}$ at 25°C
Dimensions (mm)	27 x 11.9 x 6.7
Typical Applications	Humidity and temperature plug and play transducers for OEM low cost consumer applications

## HUMIDITY AND TEMPERATURE (NTC) PROBES

Analog Output



### MEAS HM1500LF

Package	Probe, RH only
Type	Cost effective analog voltage RH probe
Operating RH Range	0 to 100% RH
Operating Temp.	-40°C to 60°C
Unique Features	<ul style="list-style-type: none"> <li>• Electronics fully protected with potting material</li> <li>• Optional wiring length and connectors</li> </ul>
Calibration	±3% RH at 55% RH
Dimensions (mm)	57 x 11 x 11 (Standard wire length of 200 mm)
Typical Applications	Medical, telecommunication cabinets, green houses, process control, industrial



### MEAS HM1520LF

Package	Probe, RH only
Type	Dedicated to low RH accurate measurement
Operating RH Range	0 to 100% RH
Operating Temp.	-40°C to 60°C
Unique Features	<ul style="list-style-type: none"> <li>• Electronics fully protected with potting material</li> <li>• Optional wiring length and connectors</li> </ul>
Calibration	±3% RH at 10% RH
Dimensions (mm)	57 x 11.5 x 11.5 (Standard wire length of 200 mm)
Typical Applications	Medical, drying cabinets, low humidity, meteorology



### MEAS HMT2500LF

Package	Probe, RH and temperature
Type	Cost effective analog voltage RH
Operating RH Range	0 to 100% RH
Operating Temp.	-40°C to 85°C
Unique Features	<ul style="list-style-type: none"> <li>• Electronics fully protected with potting material</li> <li>• Optional wiring length and connectors</li> </ul>
Calibration	±3% RH at 55% RH ±0.25°C at 25°C
Dimensions (mm)	86 x 11.5 x 11.5 (Standard wire length of 200 mm)
Typical Applications	Hygrostat, data loggers, baby cabinets

## HUMIDITY AND TEMPERATURE (NTC) SENSORS

Frequency Output Systems (Digital)



### MEAS HTF3000LF

Package	PCB for board to board
Type	Frequency output for RH, direct NTC for temperature
Operating RH Range	0 to 100% RH
Operating Temp.	-40°C to 85°C
Unique Features	<ul style="list-style-type: none"> <li>• Voltage supply from 3 to 8 VDC</li> <li>• Through hole or SMD</li> <li>• T and R available</li> </ul>
Calibration	±3% RH at 55% RH ±0.25°C at 25°C
Dimensions (mm)	12.5 x 18.5 x 11.2
Typical Applications	Passenger comfort improvement, hygrostat, HVACR, printer

## E&V HUMIDITY AND TEMPERATURE MODULES



### MEAS H2TG, H2TD Series\*

<b>Package</b>	Cost effective module for automotive defogging application
<b>Type</b>	<ul style="list-style-type: none"> <li>• Dew point and windshield temperature measurement</li> <li>• Analog or digital (LIN) output</li> </ul>
<b>Operating RH Range</b>	0 to 100% RH
<b>Operating Temp.</b>	-40°C to 85°C
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Electronics fully protected with potting material</li> </ul>
<b>Calibration</b>	±1.5°DP at 10°C ±0.8°C at 25°C
<b>Dimensions (mm)</b>	27 x 32 x YY (Depending on the connector, from 6 to 10.8 mm length)
<b>Typical Applications</b>	Fogging and cabin energy control



### MEAS H2TD368x\*

<b>Package</b>	Cost effective module for truck defogging application
<b>Type</b>	<ul style="list-style-type: none"> <li>• Dew point and windshield temperature measurement</li> <li>• LIN output</li> </ul>
<b>Operating RH Range</b>	0 to 100% RH
<b>Operating Temp.</b>	-40°C to 85°C
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Optional bracket and cover for installation</li> <li>• Electronics fully protected with potting material</li> <li>• 12 V or 24 V power supply</li> </ul>
<b>Calibration</b>	±1.5°DP at 10°C ±0.8°C at 25°C
<b>Dimensions (mm)</b>	22 x 43 x 10
<b>Typical Applications</b>	Fogging and cabin energy control



### MEAS HTM2500B6Cy\*

<b>Package</b>	Engine probe for truck and automotive
<b>Type</b>	<ul style="list-style-type: none"> <li>• Dew point measurement</li> <li>• Analog output</li> </ul>
<b>Operating RH Range</b>	0 to 100% RH
<b>Operating Temp.</b>	-40°C to 105°C
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Electronics fully protected with potting material</li> </ul>
<b>Calibration</b>	±3% RH at 55% RH ±0.8°C at 25°C
<b>Dimensions (mm)</b>	70 x 64.5 x 54.5 (Integrated connector)
<b>Typical Applications</b>	Humidity and temperature engine control



### MEAS HTD2800B11C6\*

<b>Package</b>	Trican engine probe for truck and automotive
<b>Type</b>	<ul style="list-style-type: none"> <li>• Temperature, humidity, pressure measurement</li> <li>• CAN output</li> </ul>
<b>Operating RH Range</b>	0 to 100% RH 0 to 150 g/Kg
<b>Operating Temp.</b>	-40°C to 125°C
<b>Pressure Range</b>	1 kPa to 115 kPa
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Configurable CAN Frame</li> <li>• Self diagnostic capabilities to comply with J1939, EPA / EURO and CARB requirements</li> </ul>
<b>Calibration</b>	SH: ±2.5 g/Kg Temperature: ±2°C at 25°C Pressure: ±1% FS
<b>Dimensions (mm)</b>	76.3 x 64.3 x 55.9 (Integrated connector)
<b>Typical Applications</b>	Emission control application such as NOx control with air intake measurements, engine management



### MEAS HTD2610\*

<b>Package</b>	Engine probe for truck and automotive
<b>Type</b>	<ul style="list-style-type: none"> <li>• Dew point measurement</li> <li>• LIN output</li> </ul>
<b>Operating RH Range</b>	0 to 100% RH
<b>Operating Temp.</b>	-40°C to 125°C
<b>Pressure Range</b>	—
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• 12 V power supply</li> </ul>
<b>Calibration</b>	±1° DP at 25°C
<b>Dimensions (mm)</b>	62.24 x 24.0 x 54.0 (Integrated connector)
<b>Typical Applications</b>	Humidity and temperature automotive passenger car, engine and emission management

\*Custom options available. Please consult factory.













# LIQUID LEVEL SENSORS

Our full range of liquid level sensors help address critical requirements for the construction, off-road, and automotive industries. TE solutions include sensors for measuring power steering fluid, coolant, windscreen wash, fuel and oil. Our pride is our experience in serving the heavy duty vehicle markets: truck and bus, emergency, military, recreational, luxury and coach. We also offer level sensors for storage and collection tanks, vending machines, showers for the disabled, heat exchangers, washing machines, central heating systems and boilers. To meet the unique requirements of the food and beverage industry, TE offers a range of standard cost-effective products. We also provide thousands of sensors annually to marine engine manufacturers.



## LIQUID LEVEL SENSORS

High or Low Level Sensing

						
	<b>LS304-31</b>	<b>LS304-51N</b>	<b>LS309-31</b>	<b>LS309-51N</b>	<b>LS504-31</b>	<b>LS504-51</b>
<b>Package</b>	Glass filled nylon 6.6	Glass filled nylon 6.6	Glass filled nylon 6.6	Glass filled nylon 6.6	Glass filled PPS	Glass filled PPS
<b>Type</b>	Level sensor	Level sensor	Level sensor	Level sensor	Level sensor	Level sensor
<b>Unique Features</b>	SPDT reed switch	SPDT reed switch	SPST reed switch	SPST reed switch	SPDT reed switch	SPDT reed switch
<b>Max. Pressure</b>	2.0 bar	4.7 bar	2.0 bar	4.7 bar	2.0 bar	4.7 bar
<b>Operating Temp.</b>	-30°C to 130°C	-30°C to 130°C	-30°C to 130°C	-30°C to 130°C	-30°C to 110°C	-30°C to 110°C
<b>Dimensions (mm)</b>	103 x 29 x 29	88 x 27 x 27	103 x 29 x 29	88 x 27 x 27	103 x 29 x 29	88 x 27 x 27
<b>Typical Applications</b>	Chemical high or low level, diesel fuel, fuel low level, alcohols, low oil detection	Chemical high or low level, diesel fuel, fuel low level, alcohols, low oil detection	Chemical high or low level, diesel fuel, fuel low level, alcohols, low oil detection	Chemical high or low level, diesel fuel, fuel low level, alcohols, low oil detection	Coolant level indication, water high or low level, boiler heating element protection, drinking water level, boiling water	Coolant level indication, water high or low level, boiler heating element protection, drinking water level, boiling water
						
	<b>LS509-31</b>	<b>LS509-51</b>	<b>LS804-31</b>	<b>LS804-51</b>	<b>LS809-31</b>	<b>LS809-51</b>
<b>Package</b>	Glass filled PPS	Glass filled PPS	Glass filled polypropylene	Glass filled polypropylene	Glass filled polypropylene	Glass filled polypropylene
<b>Type</b>	Level sensor	Level sensor	Level sensor	Level sensor	Level sensor	Level sensor
<b>Unique Features</b>	SPST reed switch	SPST reed switch	SPDT reed switch	SPDT reed switch	SPST reed switch	SPST reed switch
<b>Max. Pressure</b>	2.0 bar	4.7 bar	2.0 bar	4.7 bar	2.0 bar	4.7 bar
<b>Operating Temp.</b>	-30°C to 110°C	-30°C to 110°C	-30°C to 105°C	-30°C to 105°C	-30°C to 105°C	-30°C to 105°C
<b>Dimensions (mm)</b>	103 x 29 x 29	88 x 27 x 27	103 x 29 x 29	88 x 27 x 27	103 x 29 x 29	88 x 27 x 27
<b>Typical Applications</b>	Coolant level indication, water high or low level, boiler heating element protection, drinking water level, boiling water	Coolant level indication, water high or low level, boiler heating element protection, drinking water level, boiling water	Continuous 80°C in water, water high or low level, condensate level alarm, drinking water level, cooling systems	Continuous 80°C in water, water high or low level, condensate level alarm, drinking water level, cooling systems	Continuous 80°C in water, water high or low level, condensate level alarm, drinking water level, cooling systems	Continuous 80°C in water, water high or low level, condensate level alarm, drinking water level, cooling systems

# PHOTO OPTIC SENSORS

Optic-based sensors include both photo optic components and complete sensor solutions. Our component series features dual LED, bi-wavelength emitters and spectrally paired photo detectors. Our optics are suited for medical applications where selection of peak wavelength is a priority, such as pulse oximetry ( $SpO_2$ ). We also package our optics into complete probe assemblies for pulse oximetry monitoring applications. Our  $SpO_2$  probe platform includes reusable finger clips, soft silicone boots, and a range of disposable sensors.





## PHOTO OPTIC SENSORS

Photo Optic Components



### MEAS ELM-4000

Package	Lead frame
Type	Emitter assembly
Range	660 nm / 880-940 nm
Unique Features	<ul style="list-style-type: none"> <li>• Low cost</li> <li>• Dual drive</li> <li>• Clear epoxy lens</li> </ul>
Accuracy	Sensor dependent
Operating Temp.	-55°C to 70°C
Dimensions (mm)	4.4 x 5.1 x 1.9
Typical Applications	Pulse oximetry, finger and ear probes, disposable



### MEAS EPM-4001

Package	Lead frame
Type	Detector assembly
Range	—
Unique Features	<ul style="list-style-type: none"> <li>• Low cost</li> <li>• Fast response</li> <li>• High efficiency</li> </ul>
Accuracy	Sensor dependent
Operating Temp.	-55°C to 70°C
Dimensions (mm)	4.4 x 5.1 x 1.8
Typical Applications	Pulse oximetry, finger and ear probes, disposable

## Pulse Oximetry (SpO<sub>2</sub>) Probe Platforms



### MEAS Disposable Sensor

Package	Biocompatible
Type	Sensor platform
Range	Adult / neonatal
Unique Features	<ul style="list-style-type: none"> <li>• Latex free</li> <li>• Lightweight</li> <li>• Microfoam / cloth</li> </ul>
Accuracy	Sensor dependent
Operating Temp.	-55°C to 70°C
Typical Applications	Pulse oximetry



### MEAS Finger Clip Sensor

Package	Biocompatible
Type	Sensor platform
Range	Adult
Unique Features	<ul style="list-style-type: none"> <li>• Soft pads</li> <li>• Lightweight</li> <li>• Easily cleaned</li> </ul>
Accuracy	Sensor dependent
Operating Temp.	-55°C to 70°C
Typical Applications	Pulse oximetry




### MEAS Soft Sensor

Package	Silicon boot
Type	Sensor platform
Range	Adult / pediatric
Unique Features	<ul style="list-style-type: none"> <li>• Ease of use</li> <li>• Lightweight</li> <li>• Latex free</li> </ul>
Accuracy	Sensor dependent
Operating Temp.	-55°C to 70°C
Typical Applications	Pulse oximetry

# PIEZO FILM SENSORS

Our piezo film sensors provide durable vibration, accelerometer, or dynamic switch elements for a wide range of markets and applications. Piezoelectric fluoropolymer film has unique capabilities and produces voltage or charge proportional to dynamic strain. The film is suited for many different custom designs, configurations and applications, including versatile coaxial cable used for everything from security to musical instrument amplification.

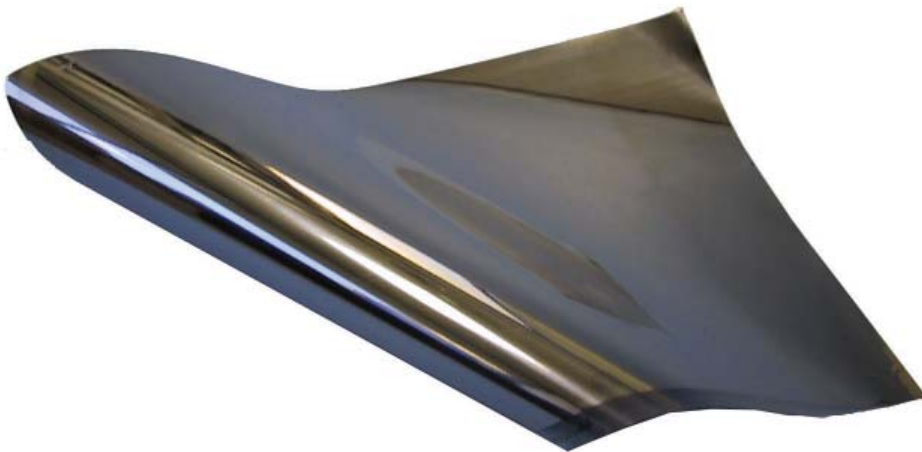

## PIEZO FILM

	 <b>MEAS DT1, SDT</b>	 <b>MEAS Piezo Cable</b>	 <b>MEAS CM-01</b>	 <b>MEAS FLDT1</b>	 <b>MEAS LDTC Analog PCB</b>
<b>Package</b>	Unshielded element with twisted pair or shielded element with shielded cable	Shielded coaxial 20 gage piezo cable	Metallized plastic housing	Unshielded film element with screen printed leads	Evaluation PCB platform for vibration sensor
<b>Type</b>	Flexible film, adhesive mount	Polymer jacketing, armored jacketing	Contact microphone	Flexible film, adhesive mount	Amplified analog output
<b>Range</b>	15 mV/ $\mu\epsilon$ up to 1% strain	$\mu$ Pa sensitivity	40 V/mm; 8 Hz to 2.2 kHz	15 mV/ $\mu\epsilon$ , up to 1% strain	1 Hz to 117 Hz
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>Thin, flexible, robust</li> <li>Withstands &gt;2% strain</li> <li>Ultra-low power (Self generating)</li> </ul>	<ul style="list-style-type: none"> <li>Continuous lengths of up to 1 km</li> <li>Shielded construction</li> </ul>	<ul style="list-style-type: none"> <li>Low noise</li> <li>Shielded construction</li> <li>High sensitivity</li> </ul>	<ul style="list-style-type: none"> <li>Thin, flexible</li> <li>Leads screen printed on film</li> <li>Connects to standard connector</li> </ul>	<ul style="list-style-type: none"> <li>Low power</li> <li>High sensitivity</li> <li>Analog and digital signal access points</li> </ul>
<b>Accuracy</b>	$\pm 20\%$ (Typical)	$\pm 20\%$ (Typical)	—	$\pm 20\%$ (Typical)	$\pm 20\%$
<b>Operating Temp.</b>	-40°C to 70°C (Higher available custom)	-40°C to 85°C	5°C to 60°C	-40°C to 70°C; (Higher available custom)	-20°C to 85°C
<b>Dimensions (mm)</b>	Application dependent	$\varnothing 3$ (Continuous lengths)	$\varnothing 18 \times 11$ high	12 x 30 active; (Custom available)	33 x 46
<b>Typical Applications</b>	Dynamic strain gage, contact microphone, acoustic pickup	Perimeter and fence security, geophone, impact sensors, intrusion detection, seat occupancy (e.g. airbag), patient bed vital signs monitor	Electronic stethoscope, contact microphone, vibration	Event timing, dynamic strain, motion detection	Vibration sensing, wake-up sensor, activity sensor

	 <b>MEAS Laboratory Amplifier</b>	 <b>MEAS 80 KHz Transducers</b>	 <b>MEAS NDT-1</b>	 <b>MEAS Tamper Box</b>	 <b>MEAS ACH-01</b>	 <b>MEAS LDTC Family</b>
<b>Package</b>	Bench top	Pin mounted	Adhesive mounted	Flat film or box mounted	Ceramic base, plastic cover, shielded cable	Piezo film elements with or without mass
<b>Type</b>	Piezo film lab amp	Air ultrasound transducer	High frequency ultrasound transducer	Tamper detection sensor	Adhesive mount	Cantilever beam with vertical or horizontal pins
<b>Range</b>	0.1 Hz to 100 kHz	80 kHz	3 MHz	Application dependent	$\pm 250$ g (Typical)	$\pm 10$ g (Typical)
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>Voltage or charge mode settings</li> <li>Multi-pole high-pass and low-pass filters</li> <li>Adjustable gain</li> </ul>	<ul style="list-style-type: none"> <li>Small size</li> <li>Low mechanical Q</li> <li>Shielded package</li> </ul>	<ul style="list-style-type: none"> <li>Flexible</li> <li>High bandwidth, low Q</li> <li>Low impedance</li> </ul>	<ul style="list-style-type: none"> <li>Low power</li> <li>Custom shapes and sizes</li> <li>High security</li> </ul>	<ul style="list-style-type: none"> <li>Extremely high bandwidth</li> <li>Low cost</li> <li>Ultra-low power</li> </ul>	<ul style="list-style-type: none"> <li>Very low cost</li> <li>High sensitivity (1 V/g)</li> <li>Ultra-low power (Self generating)</li> </ul>
<b>Accuracy</b>	Application dependent	Application dependent	Application dependent	Application dependent	$\pm 20\%$ (Typical)	$\pm 20\%$ (Typical)
<b>Operating Temp.</b>	0°C to 40°C	-20°C to 80°C	-20°C to 60°C	-40°C to 85°C	-40°C to 85°C	-40°C to 70°C
<b>Dimensions (mm)</b>	150 x 100 x 100	$\varnothing 6 \times 9$	12 x 30	Application dependent	18.80 x 13.21 x 6.10	19.05 x 6.35 x 6.35
<b>Typical Applications</b>	Low frequency dynamic strain, piezoelectric signals, machine vibration, piezo cable and traffic sensor interface	Air ranging, ultrasonic mouse, digitizers	Thickness measurement, speed of sound measurement, pulse/echo NDT	Encryption modules, POS card readers, PIN entry devices	Vibration sensing, gear box and high speed monitoring, high speed bearings and centrifuges, speaker motion feedback	Wake-up switch, load imbalance, anti-theft devices, impact sensing, vital signs monitoring

# POSITION SENSORS

We are a leading manufacturer of industrial linear and angular position, tilt and fluid level sensors. Both off-the-shelf and custom position sensing solutions are available featuring our core technologies, including inductive, potentiometric, magnetoresistive, hall effect, reed switch, electrolytic and capacitive sensing. Sophisticated designs and manufacturing techniques provide reliable and cost effective solutions for a broad range of harsh applications such as automotive, power generation, subsea, hydraulics, medical, HVACR, process controls, factory automation, security systems, military/aerospace and nuclear. TE position sensors are available with analog and digital outputs. Our comprehensive range of signal conditioning instrumentation enables us to meet the specific needs of OEMs and end users.



## ANISOTROPIC MAGNETORESISTIVE (AMR) SENSOR COMPONENTS

Magnetoresistive (MR)



### MEAS KMY, KMZ

Package	SOT-223, E-line 4 pin
Type	Linear low field sensor
Range	-2 to 2 kA/m magnetic field
Unique Features	<ul style="list-style-type: none"> <li>• High sensitivity</li> <li>• Low hysteresis</li> <li>• Linear to uniaxial field strength</li> </ul>
Output	Ratiometric with output voltage range 20 mV/V
Resolution	Typ. 0.1% of range
Accuracy	Typ. 1.0% of range
Operating Temp.	-40°C to 150°C
Dimensions (mm)	SOT: 6.6 x 7.0 x 1.6 E-line: 16 x 4.2 x 2.4
Typical Applications	Non-destructive material testing, spray arm detection in dish washers, magnetic imaging, brake pedal position



### MEAS MS32

Package	TDFN
Type	Low field switch sensor
Range	1 to 3 kA/m magnetic switching field
Unique Features	<ul style="list-style-type: none"> <li>• Linearized ratiometric output</li> <li>• Temperature compensated switching point</li> </ul>
Output	Ratiometric with output voltage range 10 mV/V
Resolution	Typ. 0.1 kA/m
Accuracy	Typ. 0.1 kA/m
Operating Temp.	-25°C to 85°C
Dimensions (mm)	TDFN: 2.5 x 2.5 x 0.8
Typical Applications	Piston position switch, reed switch replacement



### MEAS KMT32B, KMT37

Package	TDFN, SO-8
Type	Angle sensor
Range	180° angle
Unique Features	<ul style="list-style-type: none"> <li>• High accuracy</li> <li>• High resolution</li> </ul>
Output	Sine and cosine signals with output voltage range 20 mV/V
Resolution	Typ. 0.01° to 0.1°
Accuracy	Typ. 0.1° to 1.0°
Operating Temp.	-40°C to 150°C (175°C on request)
Dimensions (mm)	TDFN: 2.5 x 2.5 x 0.8 SO-8: 5 x 4 x 1.75
Typical Applications	Steering position, flow meters, rpm meters, rotary encoders



### MEAS KMT36H

Package	TDFN 2.5 x 2.5
Type	Angle sensor
Range	360° angle
Unique Features	<ul style="list-style-type: none"> <li>• High accuracy</li> <li>• High resolution</li> <li>• 360° full turn</li> </ul>
Output	Three 120° phase shifted output signals with output voltage range 20 mV/V
Resolution	Typ. 0.01° to 0.1°
Accuracy	Typ. 0.1° to 1°
Operating Temp.	-40°C to 150°C
Dimensions (mm)	TDFN: 2.5 x 2.5 x 0.8
Typical Applications	Steering position, gage readings, rotary encoders



### MEAS KMX Series

Package	DFN 2 x 6
Type	Linear displacement sensor
Range	Absolute within pole pitch, else incremental
Unique Features	<ul style="list-style-type: none"> <li>• For pole pitch</li> <li>• KMX 1000: p= 1 mm</li> <li>• KMX 2000: p= 2 mm</li> <li>• KMX 5000: p= 5 mm</li> </ul>
Output	Sine and cosine signals with output voltage range 20 mV/V
Resolution	0.01% to 0.1% of pole pitch
Accuracy	0.1% to 1.0% of pole pitch
Operating Temp.	-40°C to 125°C
Dimensions (mm)	DFN: 2 x 6 x 0.8
Typical Applications	Roller conveyors, circular saws, bending machines etc.



### MEAS KMA36

Package	TSSOP
Type	Angle sensor
Range	360° angle
Unique Features	<ul style="list-style-type: none"> <li>• Low cost MR encoder for rotational and incremental measurements</li> </ul>
Output	Voltage 0 - 5 V, I <sup>2</sup> C, customer specific
Resolution	Typ. 0.1°
Accuracy	Typ. 0.3°
Operating Temp.	-25°C to 85°C
Dimensions (mm)	TSSOP20: 6.5 x 6.4 x 1.2
Typical Applications	Knobs, small robotics, angular / linear position

ANGULAR POSITION TRANSDUCERS—INDUCTIVE

Absolute



**MEAS RVIT-Z**

Package	PCB for OEM volumes
Resolution	Infinite
Excitation	DC voltage
Output	DC voltage, DC current, digital
Range	Up to ±75°
Unique Features	<ul style="list-style-type: none"> <li>• Absolute position</li> </ul>
Operating Temp.	-25°C to 85°C
Dimensions (mm)	Custom
Typical Applications	Viscometers, valve position, robotics, HVACR vane position, ATM's, joysticks



**MEAS R60D**

Package	Servo mount with ball bearing
Resolution	Infinite
Excitation	DC symmetrical ±15 VDC
Output	±7.5 VDC
Range	±60°
Unique Features	<ul style="list-style-type: none"> <li>• Absolute position</li> <li>• Low momentum of inertia</li> </ul>
Operating Temp.	-25°C to 85°C
Dimensions (mm)	Aluminum case size 11 (Ø27 mm)
Typical Applications	Dancer arm position, rotary actuator position feedback, throttle lever position feedback, ball valve position, textile manufacturing equipment, printing presses



**MEAS R30A**

Package	Servo mount with ball bearing
Resolution	Infinite
Excitation	AC operated
Output	AC voltage
Range	±30° to ±60°
Unique Features	<ul style="list-style-type: none"> <li>• Absolute position</li> </ul>
Operating Temp.	-55°C to 150°C
Dimensions (mm)	Aluminum case size 11 (Ø27 mm)
Typical Applications	Machine tool equipment, rotary actuator feedback, valve positioning, power generation valve position

ANGULAR POSITION—ENCODERS

Absolute



**MEAS ED-18**

Package	Medium duty with sleeve or ball bearing
Resolution	Analog 1.4°
Max. Speed	300 RPM (Sleeve bearing) 3000 RPM (Ball bearing)
Excitation	5 VDC
Unique Features	<ul style="list-style-type: none"> <li>• Low profile</li> <li>• Excellent stability</li> <li>• No optical degradation</li> </ul>
Output	Voltage or current
Range	360°
Operating Temp.	-40°C to 85°C
Dimensions (mm)	25.4 x 25.4 x 33.78
Typical Applications	Feedback sensor or human machine interface device, servomotor position and speed control



**MEAS ED-22**

Package	Medium duty with sleeve bearing
Resolution	Analog 1.4°
Max. Speed	300 RPM
Excitation	5 VDC
Unique Features	<ul style="list-style-type: none"> <li>• Encapsulated electronics, sealed unit</li> <li>• Highly resistant to vibration</li> <li>• No optical degradation</li> </ul>
Output	Voltage
Range	270°
Operating Temp.	-40°C to 85°C
Dimensions (mm)	Ø19.1 x 37.1
Typical Applications	Low-cost, non-contact human machine interface potentiometer replacement



**MEAS R36**

Package	Heavy duty shaftless
Resolution	Analog 1.4°
Max. Speed	—
Excitation	5 VDC
Unique Features	<ul style="list-style-type: none"> <li>• Rugged housing</li> <li>• Shaftless</li> <li>• No optical degradation</li> </ul>
Output	Voltage
Range	180°
Operating Temp.	-40°C to 85°C
Dimensions (mm)	37.36 x 25.4 x 7.62
Typical Applications	Feedback sensor or human machine interface device, rudder control, servomotor position and speed control

## ANGULAR POSITION—ENCODERS

### Absolute



#### MEAS H005, H009 Series

<b>Package</b>	<ul style="list-style-type: none"> <li>• 12.7 mm - 22.19 mm / .500 in - .875 in housing diameter</li> <li>• 3.170 mm / .1248 in shaft diameter</li> <li>• 16.9 mm - 17.4 mm / .670 in - .680 in housing length</li> </ul>
<b>Range</b>	Up to 359 degrees
<b>Output Options</b>	Analog / PWM / Serial
<b>Resolution</b>	12-bit analog / PWM 14-bit serial (SPI)
<b>Absolute Linearity</b>	±0.2%
<b>Nominal Supply</b>	5 volts
<b>Operating Temp.</b>	-40°C to 150°C
<b>Rotational Life</b>	> 100 million cycles (Bearing life)
<b>Typical Applications</b>	Critical position feedback applications in commercial, industrial, medical, aircraft and military markets



#### MEAS H009, 1200 Series Dual Output

<ul style="list-style-type: none"> <li>• 22.23 mm / .875 in housing diameter</li> <li>• 3.170 mm / .1248 in shaft diameter</li> <li>• 26.1 mm / 1.03 in housing length</li> </ul>	<ul style="list-style-type: none"> <li>• 22.23 mm / .875 in housing diameter</li> <li>• 3.170 mm / .1248 in shaft diameter</li> <li>• 26.1 mm / 1.03 in housing length</li> </ul>
<b>Range</b>	Up to 359 degrees (Dual output)
<b>Output Options</b>	Analog / PWM / Serial
<b>Resolution</b>	12-bit analog / PWM 14-bit serial (SPI)
<b>Absolute Linearity</b>	± 0.2% (Dual output)
<b>Nominal Supply</b>	5 volts (Dual output)
<b>Operating Temp.</b>	-40°C to 150°C
<b>Rotational Life</b>	> 100 million cycles (Bearing life)
<b>Typical Applications</b>	Critical position feedback applications in commercial, industrial, medical, aircraft and military markets

### Incremental



#### MEAS ED-19

<b>Package</b>	Medium duty with sleeve or ball bearing
<b>Resolution/ Accuracy</b>	1024, 400, 256 CPR (Others on request)
<b>Max. Speed</b>	300 RPM (Sleeve bearing) 3000 RPM (Ball bearing)
<b>Excitation</b>	5 VDC
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Sleeve or ball bearing</li> <li>• No optical degradation</li> </ul>
<b>Output</b>	Quadrature (TTL level, open collector)
<b>Range</b>	360°
<b>Operating Temp.</b>	-40°C to 85°C
<b>Dimensions (mm)</b>	25.4 x 25.4 x 33.78
<b>Typical Applications</b>	Feedback sensor or human machine interface device, servo / stepper motor position and speed control



#### MEAS ED-20

Medium duty with ball bearing	Medium duty with ball bearing
1024, 400, 256 CPR (Others on request)	1024, 400, 256 CPR (Others on request)
3000 RPM	3000 RPM
5 VDC (NPN and LVD), 12 - 32 VDC (HVD)	5 VDC (NPN and LVD), 12 - 32 VDC (HVD)
<ul style="list-style-type: none"> <li>• Resistant to contamination</li> <li>• Metallic threaded bushing mounting</li> <li>• No optical degradation</li> </ul>	<ul style="list-style-type: none"> <li>• Resistant to contamination</li> <li>• Metallic threaded bushing mounting</li> <li>• No optical degradation</li> </ul>
Quadrature (NPN, LVD and HVD)	Quadrature (NPN, LVD and HVD)
360°	360°
-40°C to 85°C	-40°C to 85°C
Ø31.75 x 33.24	Ø31.75 x 33.24
Feedback sensor or human machine interface device, servo / stepper motor position and speed control	Feedback sensor or human machine interface device, servo / stepper motor position and speed control

TILT SENSORS

Single Axis



**MEAS E-Series**

<b>Package</b>	Ceramic housing
<b>Type</b>	Inclination sensor module
<b>Range</b>	±5°, ±15°
<b>Output</b>	Voltage
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Easy to handle</li> <li>• Minimal temperature drift</li> <li>• Good long term stability</li> </ul>
<b>Accuracy</b>	±0.2° to ±0.5°
<b>Operating Temp.</b>	-25°C to 85°C
<b>Dimensions (mm)</b>	29 x 17 x 16.5
<b>Typical Applications</b>	Road construction, building monitoring, weighing systems, mobile and stationary cranes, platform leveling



**MEAS AccuStar EA**

<b>Package</b>	LCP housing
<b>Type</b>	Inclinometer sensor module
<b>Range</b>	±45° to ±60°
<b>Output</b>	Voltage
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Compact</li> <li>• Low power</li> <li>• Vertical and horizontal mount</li> </ul>
<b>Accuracy</b>	0° to 10° ±0.1% accuracy 10° to 60° ±0.75% reading
<b>Operating Temp.</b>	-30°C to 65°C
<b>Dimensions (mm)</b>	65.91 x 51.56 x 30.5
<b>Typical Applications</b>	Wheel alignment, construction, equipment, antenna positioning, robotics, crane / boom angle



**MEAS APS System**

<b>Package</b>	Plastic housing
<b>Type</b>	Inclination system
<b>Range</b>	±45°, ±90°
<b>Output</b>	Analog / digital
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Stand alone system</li> <li>• Separate system and sensor</li> </ul>
<b>Accuracy</b>	0° to 10° ±0.1% accuracy 10° to 45° ±0.75% of reading
<b>Operating Temp.</b>	-25°C to 65°C
<b>Dimensions (mm)</b>	127.5 x 88 x 32.2
<b>Typical Applications</b>	Tower crane safety, RV and mobile trailer leveling, water and oil well drilling rigs, mining equipment



**MEAS G-Series**

<b>Package</b>	Aluminum housing IP67
<b>Type</b>	Inclinometer
<b>Range</b>	±10°
<b>Output</b>	Switch
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Programmable</li> <li>• EMC standard</li> <li>• High switch accuracy</li> </ul>
<b>Accuracy</b>	±0.25°
<b>Operating Temp.</b>	-25°C to 85°C
<b>Dimensions (mm)</b>	80 x 75 x 57.5
<b>Typical Applications</b>	Lift platforms, building device control, train inclination monitoring, position switch



**MEAS IT9000**

<b>Package</b>	Aluminum or stainless
<b>Type</b>	Inclinometer
<b>Range</b>	±45° to ±240°
<b>Output</b>	Voltage divider, 4 - 20 mA
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Rugged industrial design, IP67 / 68</li> <li>• Submersible</li> <li>• Designed for brutal environments</li> <li>• CSA, CENELEC certification for hazardous area applications</li> </ul>
<b>Accuracy</b>	±1%
<b>Operating Temp.</b>	-34°C to 90°C
<b>Dimensions (mm)</b>	Ø130 x 100
<b>Typical Applications</b>	Waste water control, tainter gates, draw bridges, heavy industrial applications



**MEAS AccuStar IP66**

<b>Package</b>	Aluminum housing IP66
<b>Type</b>	Inclinometer
<b>Range</b>	±3° to ±45°
<b>Output</b>	Current
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• EMI and RFI rated</li> <li>• CE pending</li> <li>• Water tight enclosure</li> </ul>
<b>Accuracy</b>	0° to 10° ±0.1% linearity 10° to 45° ±1% linearity
<b>Operating Temp.</b>	-25°C to 60°C
<b>Dimensions (mm)</b>	98.04 x 63 x 35.05
<b>Typical Applications</b>	Tower crane safety, RV and mobile trailer leveling, water and oil well drilling rigs, mining equipment



## TILT SENSORS

Dual Axis



### MEAS DPL, DPN Series

<b>Package</b>	PCB board
<b>Type</b>	Inclination board module
<b>Range</b>	±2° to ±30°
<b>Output</b>	Voltage / RS 232 / SPI
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• High resolution</li> <li>• Minimal temperature drift</li> <li>• User configurable</li> </ul>
<b>Accuracy</b>	±0.05° to ±0.8°
<b>Operating Temp.</b>	-40°C to 85°C
<b>Dimensions (mm)</b>	45 x 45 x 20
<b>Typical Applications</b>	Laser leveling, weighing systems, mobile and stationary cranes, hydraulic leveling, building monitoring, wind power



### MEAS DOG2 Series

<b>Package</b>	Plastic PA 6.6 housing, IP67
<b>Type</b>	Inclinometer
<b>Range</b>	±25°, ±45°, ±90°
<b>Output</b>	Voltage / Current / J1939 / CANopen®
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Plug and play</li> <li>• Wide measurement range</li> <li>• Cost-efficient</li> <li>• Cable with connector</li> <li>• Fast MEMS sensor</li> </ul>
<b>Accuracy</b>	< ± 0.5° (Full temp. range)
<b>Operating Temp.</b>	-40°C to 85°C
<b>Dimensions (mm)</b>	70.5 x 45 x 15
<b>Typical Applications</b>	Off road vehicle, fork lift, truck leveling, man lift, harvester, farm machine, tip over protection, solar panel control



### MEAS DPG Series

<b>Package</b>	Aluminum housing IP67
<b>Type</b>	Inclinometer
<b>Range</b>	±5° to ±30°
<b>Output</b>	RS232 / Voltage
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• CE approved</li> <li>• Rugged housing</li> <li>• Easy to use</li> <li>• User configurable</li> </ul>
<b>Accuracy</b>	±0.05° to ±0.3°
<b>Operating Temp.</b>	-40°C to 85°C
<b>Dimensions (mm)</b>	84 x 70 x 34.2
<b>Typical Applications</b>	Platform leveling, road construction machines, tunnel drilling, mobile leveling



### MEAS D Series

<b>Package</b>	Aluminum housing IP67
<b>Type</b>	Inclinometer
<b>Range</b>	±5° to ±30°
<b>Output</b>	RS232 / Voltage / Current / Switch / PWM / CANopen®
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• High accuracy</li> <li>• Rugged housing</li> <li>• Programmable</li> <li>• CE approved</li> </ul>
<b>Accuracy</b>	±0.04° to ±0.8°
<b>Operating Temp.</b>	-40°C to 85°C
<b>Dimensions (mm)</b>	84 x 70 x 46
<b>Typical Applications</b>	Drilling machines, mobile and stationary cranes, wind power, antenna / radar leveling

## PROXIMITY SENSORS



### MEAS PS801

<b>Package</b>	Stainless steel
<b>Type</b>	<ul style="list-style-type: none"> <li>• Proximity sensor</li> <li>• Used with proximity magnet</li> </ul>
<b>Unique Features</b>	SPST reed switch, normally open
<b>Operating Temp.</b>	-30°C to 120°C
<b>Dimensions (mm)</b>	Ø12 x 65
<b>Typical Applications</b>	Door interlocks, hook switches, security systems, safety interlocks, position indication



### MEAS PS811

<b>Package</b>	Nylon 6.6
<b>Type</b>	<ul style="list-style-type: none"> <li>• Proximity sensor</li> <li>• Used with proximity magnet</li> </ul>
<b>Unique Features</b>	SPST reed switch, normally open
<b>Operating Temp.</b>	-30°C to 110°C
<b>Dimensions (mm)</b>	Ø10 x 38
<b>Typical Applications</b>	Door interlocks, hook switches, security systems, safety interlocks, position indication



### MEAS PS831

<b>Package</b>	Stainless steel
<b>Type</b>	<ul style="list-style-type: none"> <li>• Proximity sensor</li> <li>• Used with proximity magnet</li> </ul>
<b>Unique Features</b>	SPST reed switch, normally open
<b>Operating Temp.</b>	-30°C to 130°C
<b>Dimensions (mm)</b>	Ø12 x 32
<b>Typical Applications</b>	Door interlocks, hook switches, security systems, safety interlocks, position indication



### MEAS PS2011AB

<b>Package</b>	Glass filled nylon 6.6
<b>Type</b>	<ul style="list-style-type: none"> <li>• Proximity sensor</li> <li>• Used with proximity magnet</li> </ul>
<b>Unique Features</b>	SPST reed switch, normally open
<b>Operating Temp.</b>	-30°C to 105°C
<b>Dimensions (mm)</b>	29 x 7 x 20
<b>Typical Applications</b>	Door interlocks, hook switches, security systems, safety interlocks, position indication



### MEAS PS2021AB

<b>Package</b>	Glass filled nylon 6.6
<b>Type</b>	<ul style="list-style-type: none"> <li>• Proximity sensor</li> <li>• Used with proximity magnet</li> </ul>
<b>Unique Features</b>	SPST reed switch, normally closed
<b>Operating Temp.</b>	-30°C to 105°C
<b>Dimensions (mm)</b>	29 x 7 x 20
<b>Typical Applications</b>	Door interlocks, hook switches, security systems, safety interlocks, position indication



### MEAS PS2031AB

<b>Package</b>	Glass filled nylon 6.6
<b>Type</b>	<ul style="list-style-type: none"> <li>• Proximity sensor</li> <li>• Used with proximity magnet</li> </ul>
<b>Unique Features</b>	SPDT reed switch
<b>Operating Temp.</b>	-30°C to 105°C
<b>Dimensions (mm)</b>	29 x 7 x 20
<b>Typical Applications</b>	Door interlocks, hook switches, security systems, safety interlocks, position indication



### MEAS PS501

<b>Package</b>	Glass filled nylon 6.6
<b>Type</b>	<ul style="list-style-type: none"> <li>• Proximity sensor</li> <li>• Used with proximity magnet</li> </ul>
<b>Unique Features</b>	SPST reed switch, normally open
<b>Operating Temp.</b>	-30°C to 130°C
<b>Dimensions (mm)</b>	Ø6 x 32
<b>Typical Applications</b>	Door interlocks, hook switches, security systems, safety interlocks, position indication

## PROXIMITY MAGNET



**MEAS PM101**

<b>Package</b>	Glass filled nylon 6.6
<b>Type</b>	<ul style="list-style-type: none"> <li>• Proximity magnet</li> <li>• Used with proximity sensor</li> </ul>
<b>Unique Features</b>	Housed magnet
<b>Operating Temp.</b>	-30°C to 105°C
<b>Dimensions (mm)</b>	29 x 7 x 20
<b>Typical Applications</b>	Door interlocks, hook switches, security systems, safety interlocks, position indication



**MEAS PM50**

<b>Package</b>	Glass filled nylon 6.6
<b>Type</b>	<ul style="list-style-type: none"> <li>• Proximity magnet</li> <li>• Used with proximity sensor</li> </ul>
<b>Unique Features</b>	Housed magnet
<b>Operating Temp.</b>	-30°C to 70°C
<b>Dimensions (mm)</b>	Ø6 x 32
<b>Typical Applications</b>	Door interlocks, hook switches, security systems, safety interlocks, position indication



**MEAS PM81**

<b>Package</b>	Nylon 6.6
<b>Type</b>	<ul style="list-style-type: none"> <li>• Proximity magnet</li> <li>• Used with proximity sensor</li> </ul>
<b>Unique Features</b>	Housed magnet
<b>Operating Temp.</b>	-30°C to 120°C
<b>Dimensions (mm)</b>	Ø10 x 38
<b>Typical Applications</b>	Door interlocks, hook switches, security systems, safety interlocks, position indication



**MEAS PM83**

<b>Package</b>	Stainless steel
<b>Type</b>	<ul style="list-style-type: none"> <li>• Proximity magnet</li> <li>• Used with proximity sensor</li> </ul>
<b>Unique Features</b>	Housed magnet
<b>Operating Temp.</b>	-30°C to 120°C
<b>Dimensions (mm)</b>	Ø12 x 32
<b>Typical Applications</b>	Door interlocks, hook switches, security systems, safety interlocks, position indication

## LINEAR POSITION TRANSDUCERS

### Cable Extension Transducers



**MEAS PT1, PT5**

<b>Range</b>	0 - 2 to 0 - 250 inches
<b>Output</b>	Voltage divider, 0 - 5 VDC, 0 - 10 VDC, 4 - 20 mA, incremental encoder, CANbus, DeviceNet™, RS-232
<b>IP Rating</b>	IP65, IP67 (PT5)
<b>Enclosure</b>	Aluminum and abs plastic (PT1)
<b>Accuracy</b>	±0.04% to ±0.25%
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Designed for most factory environments</li> <li>• Industry standard output signals</li> <li>• User serviceable</li> <li>• Compact design (PT1)</li> </ul>
<b>Operating Temp.</b>	-40°C to 90°C
<b>Dimensions (mm)</b>	85 x 100 x 70 (PT1) 100 x 175 x 80 (PT5)
<b>Typical Applications</b>	Factory automation, industrial, die casting, injection molding



**MEAS PT8000**

<b>Range</b>	0 - 2 to 0 - 60 inches
<b>Output</b>	Voltage divider, 0 - 5 VDC, 0 - 10 VDC, 4 - 20 mA, incremental / absolute encoder, CANbus, DeviceNet™, RS-232
<b>IP Rating</b>	IP67, IP68
<b>Enclosure</b>	Aluminum or stainless
<b>Accuracy</b>	±0.04% to ±0.25%
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Heavy duty, submersible</li> <li>• Designed for extreme industrial and marine environments</li> <li>• CSA, CENELEC certification for hazardous area applications</li> <li>• High accuracy, high acceleration</li> <li>• Free-release proof with VLS option</li> <li>• M12 and DEUTSCH connector options</li> </ul>
<b>Operating Temp.</b>	-40°C to 90°C
<b>Dimensions (mm)</b>	90 x 140 x 135
<b>Typical Applications</b>	Steel mills, lumber and paper mills, factory automation, die-casting, injection molding, mobile construction and mining



**MEAS PT9000**

<b>Range</b>	0 - 75 to 0 - 1700 inches
<b>Output</b>	Voltage divider, 0 - 5 VDC, 0 - 10 VDC, 4 - 20 mA, incremental / absolute encoder, CANbus, DeviceNet™, RS-232
<b>IP Rating</b>	IP67, IP68
<b>Enclosure</b>	Aluminum or stainless
<b>Accuracy</b>	±0.04% to ±0.25%
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Heavy duty, submersible</li> <li>• Proven workhorse for long stroke applications</li> <li>• Designed for extreme industrial and marine environments</li> <li>• CSA, CENELEC certification for hazardous area applications</li> <li>• Free-release proof with VLS option</li> <li>• M12 and DEUTSCH connector options</li> </ul>
<b>Operating Temp.</b>	-40°C to 90°C
<b>Dimensions (mm)</b>	200 x 135 x 125
<b>Typical Applications</b>	Mobile hydraulic boom position, water resource management, mining and tunnel boring equipment, telescoping mechanism position, theatre stage control

## LINEAR POSITION TRANSDUCERS

### Cable Extension Transducers



#### MEAS M150, MTA

Range	0 - 1.5 to 0 - 5 inches
Output	Voltage divider
Environment / IP Rating	IP50
Enclosure	Aluminum
Accuracy	±0.4% to ±1%
Unique Features	<ul style="list-style-type: none"> <li>• M150: one of the world's smallest stringpots</li> <li>• Designed for space-critical and testing applications</li> </ul>
Operating Temp.	-40°C to 85°C (M150) -55°C to 100°C (MTA)
Dimensions (mm)	19 x 19 x 10 (M150)
Typical Applications	Aerospace, automotive instrumentation, automotive crash testing, automotive and motorcycle racing



#### MEAS MT2, MT3

Range	0 - 3 to 0 - 30 inches
Output	Voltage divider, incremental encoder
Environment / IP Rating	IP50, IP67 (MT3A)
Enclosure	Aluminum and polycarbonate
Accuracy	±0.25% to ±1.1%
Unique Features	<ul style="list-style-type: none"> <li>• Designed for test applications</li> <li>• Dual-axis measuring cable alignment</li> <li>• Tracks high-acceleration linear position up to 136g's</li> <li>• High-frequency response</li> <li>• GAM EG 13 certification</li> </ul>
Operating Temp.	-55°C to 125°C
Dimensions (mm)	55 x 45 x 55
Typical Applications	Automotive crash testing, aerospace and flight testing



#### MEAS SM, SP

Range	0 - 2.5 to 0 - 50 inches
Output	Voltage divider, 0 - 10 VDC, 4 - 20 mA
Environment / IP Rating	IP50, IP67 (SP)
Enclosure	Polycarbonate with stainless steel bracket
Accuracy	±0.25% to ±1%
Unique Features	<ul style="list-style-type: none"> <li>• In-stock</li> <li>• Compact design</li> <li>• M12 connection</li> <li>• Adjustable mounting bracket</li> <li>• Free-release tolerant</li> <li>• Custom configurations for OEMS</li> </ul>
Operating Temp.	-18 to 70°C (SM) -40°C to 85°C (SP)
Dimensions (mm)	120 x 140 x 140
Typical Applications	Factory automation, light industrial, seismic testing, racing instrumentation, medical imaging systems, fume hood position



#### MEAS SG, SR

Range	0 - 80 to 0 - 175 inches
Output	Voltage divider, 0 - 5 VDC, 0 - 10 VDC, 4 - 20 mA, incremental encoder, CANbus
Environment / IP Rating	IP67
Enclosure	Polycarbonate with stainless steel bracket
Accuracy	±0.35% to ±0.5%
Unique Features	<ul style="list-style-type: none"> <li>• In stock</li> <li>• Low cost, high value stringpot</li> <li>• Versatile stainless steel mounting bracket</li> <li>• Simple one-button user scalable stroke range (SR)</li> <li>• Custom configurations available for OEM customers</li> </ul>
Operating Temp.	-40°C to 85°C
Dimensions (mm)	100 x 120 x 200
Typical Applications	Outdoor mobile construction equipment, outrigger positioning, hydraulic lifts, water and power controls



#### MEAS SK1, SK6

Range	0 - 250 and 0 - 400 inches
Output	4 - 20 mA, 0 - 10 V, voltage divider, CAN J1939, CANopen®, Encoder drive
Environment / IP Rating	IP67
Enclosure	Polycarbonate with stainless steel bracket
Accuracy	±.25% FS
Unique Features	<ul style="list-style-type: none"> <li>• In stock</li> <li>• Compact design</li> <li>• M12 connectivity</li> <li>• Adjustable mounting bracket</li> </ul>
Operating Temp.	-40°C to 85°C
Dimensions (mm)	120 x 140 x 140
Typical Applications	Mobile construction equipment, factory automation



#### MEAS PTX, PT101

Range	0 - 2 to 0 - 100 inches
Output	Voltage divider, 0 - 5 VDC, 0 - 10 VDC, 4 - 20 mA, incremental encoder, velocity output (DV301)
Environment / IP Rating	IP50
Enclosure	Aluminum
Accuracy	±0.04% to ±0.25%
Unique Features	<ul style="list-style-type: none"> <li>• Original classic design</li> <li>• High precision</li> <li>• Proven track record</li> </ul>
Operating Temp.	-40°C to 90°C
Dimensions (mm)	Model and range specific
Typical Applications	Aerospace testing, architectural and structural testing, factory automation

LINEAR POSITION TRANSDUCERS—INDUCTIVE

Absolute



**MEAS HR**

Package	AISI-400 series stainless steel
Linearity	±0.25% of range
Excitation	AC operated
Output	AC voltage
Range	±0.05 to ±10 inches
Unique Features	<ul style="list-style-type: none"> <li>• Large bore to core clearance</li> <li>• Broad range of excitation frequencies</li> <li>• Variety of options</li> <li>• Mild radiation resistance option</li> </ul>
Operating Temp.	-55°C to 150°C (220°C optional)
Diameter (mm)	20.6
Typical Applications	General industrial



**MEAS M12**

Package	AISI-304 series stainless steel
Linearity	±0.25% of range
Excitation	AC operated
Output	AC voltage
Range	±10 to ±100 mm
Unique Features	<ul style="list-style-type: none"> <li>• Metric series</li> <li>• High stroke to length ratio</li> <li>• Constant sum of secondaries</li> <li>• Excellent temperature coefficient</li> </ul>
Operating Temp.	-55°C to 150°C (220°C optional)
Diameter (mm)	12
Typical Applications	Hydraulic spool valve position feedback, flight simulators, aircraft flight control feedback



**MEAS HC**

Package	AISI-400 series stainless steel
Linearity	±0.25% of range
Excitation	AC and DC operated versions
Output	AC or DC voltage, 4 - 20 mA loop or RS-485
Range	±0.05 to ±10 inches
Unique Features	<ul style="list-style-type: none"> <li>• Hermetically sealed</li> <li>• Welded connector</li> <li>• Double shielding</li> <li>• Intrinsically safe version</li> <li>• CE mark for DC versions</li> </ul>
Operating Temp.	-55°C to 150°C (AC); 0°C to 70°C (DC)
Diameter (mm)	19
Typical Applications	Harsh environments, submersible applications, process controls, valve position feedback



**MEAS XS-C**

Package	AISI-304 series stainless steel
Linearity	±0.25% of range
Excitation	AC operated
Output	AC voltage
Range	±0.25, ±0.5 and ±1 inches
Unique Features	<ul style="list-style-type: none"> <li>• High pressure</li> <li>• Bulkhead mounting</li> <li>• Hermetically sealed welded assembly</li> </ul>
Operating Temp.	-55°C to 150°C
Diameter (mm)	19
Typical Applications	Hydraulic actuators, other pressurized vessels



**MEAS DC-SE**

Package	AISI-400 series stainless steel
Linearity	±0.25% of range
Excitation	8.5 to 28 VDC
Output	0 - 5 VDC (4 wire), 1 - 6 VDC (3 wire)
Range	0 - 0.1 to 0 - 6 inches
Unique Features	<ul style="list-style-type: none"> <li>• CE mark</li> <li>• Low current consumption (6 mA typical)</li> <li>• Synchronous demodulation</li> <li>• Shielded cable</li> </ul>
Operating Temp.	-25°C to 85°C
Diameter (mm)	19
Typical Applications	Positioning sensing feedback, battery operated systems, test labs, ram guide, platen position



**MEAS XS-D**

Package	AISI-400 series stainless steel
Linearity	±2% of range
Excitation	AC operated
Output	AC voltage
Range	±1 to ±10 inches
Unique Features	<ul style="list-style-type: none"> <li>• Very high stroke to body length ratio</li> </ul>
Operating Temp.	-55°C to 150°C
Diameter (mm)	20.6
Typical Applications	Where sensor installation length is restricted, ideal replacement for linear potentiometers

Other models available, please consult MEAS website library.

## LINEAR POSITION TRANSDUCERS—INDUCTIVE

Absolute



### MACRO HSTA/R

<b>Package</b>	AISI-410 stainless steel
<b>Linearity</b>	±0.25% of range
<b>Excitation</b>	AC operated
<b>Output</b>	AC voltage
<b>Range</b>	±0.050 to ±10.0 inches
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• IP68 rating, hermetically sealed</li> <li>• Mild radiation resistant (30 Mrad) optional</li> <li>• Axial or radial connector with thru-bore construction</li> </ul>
<b>Operating Temp.</b>	-55°C to 200°C standard (Contact factory for higher temperature)
<b>Diameter (mm)</b>	19
<b>Typical Applications</b>	High temperature steam and gas valves, nuclear power plants, harsh and corrosive environments, environments with heavy dust, dirt, and humidity



### MACRO HLR/HLIR

<b>Package</b>	AISI-410 stainless steel
<b>Linearity</b>	±0.25% of range
<b>Excitation</b>	AC (HLR) or DC (HLIR)
<b>Output</b>	AC voltage or 4-20 mA
<b>Range</b>	±1 to ±10 inches
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• UL/ULC or CSA intrinsically safe rating</li> <li>• Intrinsically safe:                             <ul style="list-style-type: none"> <li>• Class I Division I, Class I Division II</li> </ul> </li> <li>• ATEX certified</li> <li>• 1/2" NPT conduit thread</li> </ul>
<b>Operating Temp.</b>	-50°C to 100°C (Per Macro Sensors instructions)
<b>Diameter (mm)</b>	19
<b>Typical Applications</b>	Gas turbine servo controls, fuel valve position feedback, petrochemical process plants



### MACRO SSI/R

<b>Package</b>	Alloy 625
<b>Linearity</b>	±0.10% of range
<b>Excitation</b>	AC or DC operated
<b>Output</b>	AC or 4-20 mA loop digital CANbus available
<b>Range</b>	±1.0 to ±10.0 inches
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Operating pressure to 5,000 psi (7,500 psi proof)</li> <li>• Seawater submersible IP68</li> <li>• Standard Seacon connector</li> <li>• Axial or radial connection</li> </ul>
<b>Operating Temp.</b>	-40°C to 80°C
<b>Diameter (mm)</b>	23.9
<b>Typical Applications</b>	Off-shore drilling platforms, pipeline monitoring, choke valves, mooring cables, extensometers, pulp and paper mills



### MACRO HPGS 750

<b>Package</b>	AISI-410 stainless steel
<b>Linearity</b>	±0.25% of range
<b>Excitation</b>	AC operated
<b>Output</b>	AC voltage
<b>Range</b>	±0.050 to ±10.0 inches
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Radial screw-on 38999 connector</li> <li>• IP68 rating, hermetically sealed</li> <li>• Designed for high vibration applications</li> </ul>
<b>Operating Temp.</b>	-55°C to 200°C
<b>Diameter (mm)</b>	19
<b>Typical Applications</b>	Nuclear power generation equipment, hydraulic cylinder position, steam valve positioning, power generation equipment, corrosive environments, high-vibration environments



### MACRO CD375

<b>Package</b>	AISI-410 stainless steel
<b>Linearity</b>	±0.25% of range
<b>Excitation</b>	AC operated
<b>Output</b>	AC voltage
<b>Range</b>	± 0.025 to ±1 inches
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Compact design</li> <li>• Operating pressure to 20,000 psi+</li> </ul>
<b>Operating Temp.</b>	-55°C to 200°C
<b>Diameter (mm)</b>	9.5
<b>Typical Applications</b>	Machine tools, robotic grippers, medical equipment, valve position sensing, hydraulic cylinder, down-hole equipment



### MACRO GHSE/R

<b>Package</b>	AISI-410 stainless steel
<b>Linearity</b>	±0.1% of range
<b>Excitation</b>	DC operated
<b>Output</b>	0 - 10 VDC
<b>Range</b>	0.100 to 4 inches
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Spring loaded design</li> <li>• IP68 rating, hermetically sealed</li> <li>• Axial and radial connection</li> <li>• Low pressure air-extend / spring-retract version available (GHSER 750-A)</li> </ul>
<b>Operating Temp.</b>	-20°C to 70°C
<b>Diameter (mm)</b>	19
<b>Typical Applications</b>	Industrial gaging systems, replaces dial indicators, fabricated metal products gaging

## LINEAR POSITION TRANSDUCERS—INDUCTIVE

Dimensional Gaging Products



**MEAS LBB Spring-Extend**



**MEAS LBB Air-Extend**



**MEAS PCA 375**



**MEAS GC**



**MEAS Ultimate-Precision Digital LBB**

<b>Linearity</b>	±0.2% of range	±0.2% of range	±0.5% of range	±0.25% (Voltage) to ±0.5% (4 - 20 mA) of range	Accuracy ±0.2%
<b>Excitation</b>	AC operated	AC operated	AC operated	AC or DC voltage	5 VDC USB (Bus or external)
<b>Output</b>	AC voltage	AC voltage	AC voltage	AC or DC voltage, RS-485, or 4 - 20 mA loop	RS485; USB
<b>Range</b>	±0.02 to ±0.20 inches	±0.04 and ±0.1 inches	±0.02 to ±1 inches	±0.05 to ±2 inches	1, 2, 5 and 10 mm
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• 0.000004 inch (0.1 µm) repeatability</li> <li>• Removable tungsten carbide contact tip</li> <li>• Double shielded LVDT</li> <li>• Repairable</li> </ul>	<ul style="list-style-type: none"> <li>• 0.000004 inch (0.1 µm) repeatability</li> <li>• Removable tungsten carbide contact tip</li> <li>• Double shielded LVDT</li> <li>• Repairable</li> </ul>	<ul style="list-style-type: none"> <li>• Longer strokes</li> <li>• IP65 cable exit</li> <li>• Accepts industry standard contact tips</li> <li>• Heavy duty return spring</li> </ul>	<ul style="list-style-type: none"> <li>• Hermetically sealed</li> <li>• Welded MS connector (MIL-C-5015)</li> <li>• CE mark for DC versions</li> <li>• Special tips available</li> <li>• Air extend spring retract available</li> </ul>	<ul style="list-style-type: none"> <li>• Plug-and-play</li> <li>• 14-bit resolution</li> <li>• COM libraries provided</li> <li>• CE mark</li> <li>• USB adapter and power supply available</li> </ul>
<b>Operating Temp.</b>	-40°C to 70°C	-40°C to 70°C	-20°C to 70°C	-55°C to 150°C (AC) 0°C to 70°C (DC)	0°C to 60°C
<b>Diameter (mm)</b>	8 or 9.5	8 or 9.5	9.5	19 mm body, 1/2 - 20 threads	Stackable gage system
<b>Typical Applications</b>	Process standards, manufacturing on-line inspection, robotics, replaces dial indicators in manual measurement systems	Process standards, manufacturing on-line inspection, robotics, replaces dial indicators in manual measurement systems	High density gaging fixtures, resistance weld verification, pressing applications, X-Y stage position feedback, rough casting inspection	Harsh environments, environments requiring hermetic seal, high temperatures (150°C for AC units)	Multi-channel electronic dimensional gaging, precision dimensional measurement, optics inspection systems, SPC data collection, hand tools

## LINEAR POSITION ENCODERS

Incremental



**MEAS ED32i**

<b>Package</b>	IP67 aluminum
<b>Range</b>	Magnetic scale, 5 mm pole pitch, typically up to 100 m absolute version up to 100 mm range on request
<b>Excitation</b>	5 VDC
<b>Output</b>	5 V TTL ABZ differential quadrature; RS-485
<b>Resolution</b>	≥10 µm; field programmable
<b>Max. Speed</b>	4 m/s
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Contactless incremental measurement</li> <li>• Very high accuracy, programmable resolution</li> <li>• High speed up to 4 m/s</li> <li>• Error detection, missing scale function</li> <li>• Adapter plate for easy mounting</li> </ul>
<b>Operating Temp.</b>	-25°C to 85°C
<b>Dimensions (mm)</b>	60 x 20 x 10
<b>Typical Applications</b>	Linear displacement measurement in industrial and medical applications

## ANGULAR POSITION—POTENTIOMETERS



**MEAS 6000 Series**  
Servo Mount

<b>Package</b>	<ul style="list-style-type: none"> <li>• 12.7 mm - 50.8 mm / 0.500" - 2.00" housing diameter</li> <li>• 3.170 mm - 6.34 mm / 0.1248" - 0.2498" shaft diameter</li> <li>• 12.7 mm - 1.74 mm / 0.500" - 0.680" housing length</li> <li>• 11.11 mm - 47.62 mm / 0.438" - 1.875" mounting pilot diameter</li> </ul>
<b>Resistance</b>	1K - 20K $\Omega$
<b>Range</b>	Up to 355°
<b>Linearity</b>	$\pm$ 0.5%
<b>Output Smoothness</b>	<0.1%
<b>Resolution</b>	Infinite
<b>Operating Temp.</b>	-65°C to 125°C
<b>Rotational Life</b>	50 million cycles / minute
<b>Typical Applications</b>	Critical position feedback applications in commercial, industrial, medical, aircraft and military markets



**MEAS 6200 Series**  
Bushing Mount

<b>Package</b>	<ul style="list-style-type: none"> <li>• 12.7 mm - 50.8 mm / 0.500" - 2.00" housing diameter</li> <li>• 3.170 mm - 6.34 mm / 0.1248" - .2498" shaft diameter</li> <li>• 12.7 mm - 1.74 mm / 0.500" - 0.680" housing length</li> <li>• 3/8 32 NEF thread / 10.31 mm / 0.4062" pilot diameter</li> </ul>
<b>Resistance</b>	1K - 20K $\Omega$
<b>Range</b>	Up to 355°
<b>Linearity</b>	$\pm$ 0.5%
<b>Output Smoothness</b>	<0.1%
<b>Resolution</b>	Infinite
<b>Operating Temp.</b>	-65°C to 125°C
<b>Rotational Life</b>	50 million cycles / minute
<b>Typical Applications</b>	Critical position feedback applications in commercial, industrial, medical, aircraft and military markets



**MEAS 6900 Series**  
Element/Wiper/Insulator

<b>Package</b>	<ul style="list-style-type: none"> <li>• 17.81 mm - 45.85 mm / 0.702" - 1.805" element outside diameter</li> <li>• 4.724 mm - 11.05 mm / 0.186" - 0.435" element inside diameter</li> <li>• 3.175 mm - 6.35 mm / 0.125" - 0.250" shaft insulator inside diameter</li> <li>• 4.064 mm - 7.80 mm / 0.160" - 0.307" mating wiper inside diameter</li> <li>• 5.08 mm / 0.200" assembled package height</li> </ul>
<b>Resistance</b>	1K / 5K / 10K $\Omega$
<b>Range</b>	Up to 350°
<b>Linearity</b>	$\pm$ 0.5%
<b>Output Smoothness</b>	< 0.1%
<b>Resolution</b>	Infinite
<b>Operating Temp.</b>	-65°C to 125°C
<b>Rotational Life</b>	50 million cycles / minute
<b>Typical Applications</b>	Critical position feedback applications in commercial, industrial, medical, aircraft and military markets



**MEAS 6100 Series**  
Hollow Shaft

<b>Package</b>	<ul style="list-style-type: none"> <li>• 27.94 mm - 66.5 mm / 1.100" - 2.62" housing diameter</li> <li>• 3.175 mm - 19 mm / 0.125" - 0.752" hollow shaft diameter</li> </ul>
<b>Resistance</b>	1K - 20K $\Omega$
<b>Range</b>	Up to 355°
<b>Linearity</b>	$\pm$ 0.5%
<b>Output Smoothness</b>	< 0.1%
<b>Resolution</b>	Infinite
<b>Operating Temp.</b>	-65°C to 125°C
<b>Rotational Life</b>	50 million cycles / minute.
<b>Typical Applications</b>	Critical position feedback applications in commercial, industrial, medical, aircraft and military markets

ANGULAR POSITION—POTENTIOMETERS



**MEAS RT8, RT9**

<b>Package</b>	Aluminum or stainless IP67, IP68
<b>Resolution</b>	±0.15% to ±1.25%
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Absolute rotary</li> <li>• Designed for heavy industrial applications</li> <li>• CSA, CENELEC certification for hazardous area applications</li> </ul>
<b>Output</b>	Voltage divider, 0 - 5 V, 0 - 10 V, 4 - 20 mA, incremental encoder, CANbus, DeviceNet™
<b>Range</b>	0 - 0.125 to 0 - 200 turns
<b>Operating Temp.</b>	-40°C to 90°C
<b>Dimensions (mm)</b>	Ø65 x 100 (RT8) Ø115 x 60 (RT9)
<b>Typical Applications</b>	Valve control, airport passenger loading bridge, water management, factory automation

LINEAR POSITION—POTENTIOMETERS



**MEAS MLP, CLP**

<b>Package</b>	Aluminum body, steel rod, IP65, IP67
<b>Range</b>	0 - 0.5 to 0 - 6" (MLP) 0 - 1 to 0 - 10" (CLP)
<b>Linearity</b>	±0.5 to ±1% (MLP) ±0.1 to ±0.2% (CLP)
<b>Excitation</b>	Up to 40 VDC max.
<b>Output</b>	Voltage divider
<b>Resolution</b>	Essentially infinite
<b>Max. Speed</b>	10 m/s
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Extended temperature range, miniature design</li> <li>• First choice for auto racing applications</li> <li>• Perfect for high cycle applications</li> </ul>
<b>Operating Temp.</b>	-40°C to 90°C
<b>Dimensions (mm)</b>	Diameter / cross section: Ø9.5 mm (MLP) 15 mm x 15 mm (CLP)
<b>Typical Applications</b>	Vehicle testing, autosport instrumentation, structural and architectural testing and robotics.



**MEAS 5903, 5905 Series**

Linear Motion

<b>Package</b>	<ul style="list-style-type: none"> <li>• 7.94 mm - 12.7 mm / 0.312" - 0.500" housing diameter</li> <li>• 1.98 mm - 3.18 mm / 0.078" - 0.125" shaft diameter</li> </ul>
<b>Resistance</b>	1K / 5K / 10K
<b>Range</b>	5903 series - up to 50.8 mm / 2" stroke 5905 series - up to 101.6 mm / 4" stroke
<b>Linearity</b>	±1%
<b>Output Smoothness</b>	<0.1%
<b>Resolution</b>	Infinite
<b>Operating Temp.</b>	-65°C to 125°C
<b>Stroke Life</b>	50 million cycles min
<b>Typical Applications</b>	Critical position feedback applications in commercial, industrial, medical, aircraft and military markets



## LVDT / RVDT INSTRUMENTATION



**MEAS LVM-110, LiM-420**

**Package** Open circuit board  
**Supply** DC voltage  
**Output** DC voltage or current  
**Operating Temp.** 0°C to 55°C  
**Unique Features**

- Master / slave for multi-up applications
- Dip switch selectable excitation frequencies
- Plug-in PCB or wire termination
- Small form factor

**Dimensions (mm)** 63 x 56 x 21  
**Typical Applications** OEM applications



**MEAS LDM-1000**

**Package** DIN rail mount  
**Supply** 10 to 30 VDC  
**Output** DC voltage and current  
**Operating Temp.** -25°C to 85°C  
**Unique Features**

- Operates with 4, 5 & 6 wire LVDT / RVDTs
- Adjustable zero, span and phase
- Status LEDs
- CE mark

**Dimensions (mm)** 115 x 99 x 23  
**Typical Applications** Automotive test track instrumentation, gas and steam turbine controls, factory automation



**MEAS ATA-2001**

**Package** 1/8 DIN panel mount  
**Supply** 115 and 220 VAC, 50 - 400 Hz  
**Output** DC voltage and current  
**Operating Temp.** -40°C to 85°C  
**Unique Features**

- Push button programmable
- Splash proof front panel
- LED status lights
- Mounting hardware included
- CE mark

**Dimensions (mm)** 267 x 99 x 49  
**Typical Applications** Precision metrology labs, power generation valve position monitoring



**MEAS PML 1000**

**Package** 1/8 DIN panel mount  
**Supply** 90 to 265 VAC, 50 - 60 Hz or 24 VDC  
**Output** DC voltage and current (RS-485 optional)  
**Operating Temp.** 10°C to 55°C  
**Unique Features**

- 5 digit LED display
- Auto-calibration
- Programmable
- Splash proof front panel
- Mounting hardware included
- CE mark

**Dimensions (mm)** 173 x 97 x 49  
**Typical Applications** Remote monitoring stations, measurement test stands, process monitoring



**MEAS MP 2000**

**Package** 1/4 DIN panel mount  
**Supply** 100 to 240 VAC, 47 - 63 Hz  
**Output** DC voltage and RS-232  
**Operating Temp.** 0°C to 55°C  
**Unique Features**

- Programmable set point controller
- Dual channel with math functions
- Digital I/O
- Large LCD display
- Splash proof front panel

**Dimensions (mm)** 178 x 92 x 92  
**Typical Applications** LVDT based weighing systems, pass / fail parts sorting, quality inspection



**MACRO LVC-4000**

**Package** DIN rail mount  
**Supply** 9 to 30 VDC  
**Output** RS-485, DC voltage, and 4-20 mA  
**Operating Temp.** -20°C to 75°C  
**Unique Features**

- Push-button calibration
- Digital RS-485 interface
- Master / slave excitation synchronization (Up to 16 channels)
- Supports all standard AC LVDTs, RVDTs, and VR half-bridge sensors

**Dimensions (mm)** 114.5 x 99 x 22  
**Typical Applications** Gas and steam turbine controls, automotive test instrumentation, factory automation



**MACRO LVC-4500**

**Package** DIN rail mount  
**Supply** 9 to 30 VDC  
**Output** RS-485, DC voltage, and 4-20 mA  
**Operating Temp.** -20°C to 75°C  
**Unique Features**

- Push-button calibration
- Diff / sum ratiometric conditioning
- Digital RS-485 interface
- Master / slave excitation synchronization (Up to 16 channels)
- Supports all standard AC LVDTs, RVDTs, and VR half-bridge sensors

**Dimensions (mm)** 114.5 x 99 x 22  
**Typical Applications** Gas and steam turbine controls, automotive test instrumentation, factory automation



**MACRO MMX Mini Module**

**Package** DIN rail mount  
**Supply** 15 to 30 VDC  
**Output** DC voltage or 4-20 mA  
**Operating Temp.** 0°C to 70 °C  
**Unique Features**

- Push-button calibration
- Flame retardant mini-module housing
- Master / slave excitation synchronization (Up to 10 channels)
- LED status lights
- Supports all standard AC LVDTs, RVDTs, and VR half-bridge sensors

**Dimensions (mm)** 85.1 x 70.4 x 17.8  
**Typical Applications** Automotive test instrumentation, factory automation

# PRESSURE SENSORS

We design and manufacture pressure sensors ranging from the sensing element to system packaging for harsh environments. We are an industry leader for our range of both standard and custom pressure sensors, from board level components to fully amplified and packaged transducers. Based on piezoresistive Microelectromechanical (MEMS) and silicon strain gage (Microfused, Krystal Bond) technology, our sensors measure everything from inches of water column (<5 mbar) to 100K psi (7K bar). Sophisticated design and advanced manufacturing techniques create reliable cost-effective solutions for medical, HVACR, off road/heavy equipment and general industrial applications. We manufacture one of the world's lowest power and smallest package pressure sensors for altimeter/NAV applications. Our sensors are signal conditioned, calibrated over temperature and include digital or analog outputs.



## BOARD LEVEL PRESSURE SENSORS

Digital Output and Altimeter



### MEAS MS4515DO, MS4525DO

Package	8 pin DIL
Type	Gage, compound (MS4515DO) Gage, absolute, differential, compound (MS4525DO)
Pressure Range	0 - 2 to 30" H <sub>2</sub> O (MS4515DO) 0 - 1 to 150 psi (MS4525DO)
Output / Span	14-bit ADC SPI or I <sup>2</sup> C
Resolution	—
Unique Features	<ul style="list-style-type: none"> <li>• Optional gel coat, low power</li> <li>• Pressure and temperature measurement</li> <li>• Single supply of 3.3 or 5.0 VDC</li> <li>• Top, side barbed or manifold o-ring port</li> <li>• J lead or thru hole pins</li> </ul>
Linearity/Absolute Accuracy	0.25% / 1% TEB
Overpressure	300 psi
Operating Temp.	-10°C to 85°C (MS4515DO) -25°C to 105°C (MS4525DO)
Dimensions (mm)	12.5 x 9.9
Typical Applications	Medical instruments, air flow measurements, process control, leak detection



### MEAS MS5803

Package	Surface mountable
Type	Absolute
Pressure Range	0 - 1 to 30 bar
Output / Span	24-bit ADC I <sup>2</sup> C and SPI (Mode 0, 3)
Resolution	12 µbar (MS5803-01BA) 0.5 mbar (MS5803-30BA)
Unique Features	<ul style="list-style-type: none"> <li>• 24-bit digital sensor, software calibration and temperature compensation (I<sup>2</sup>C and SPI), no external components</li> <li>• Supply voltage 1.8 to 3.6 V</li> </ul>
Linearity/Absolute Accuracy	±1.5 mbar at 25°C (MS5803-01BA) ±250 mbar at 0°C to 40°C (MS5803-30BA)
Overpressure	10 bar (1, 2 bar), 30 bar (5, 7, 14 bar) 50 bar(30 bar)
Operating Temp.	-40°C to 85°C
Dimensions (mm)	6.4 x 6.2 x 2.9
Typical Applications	Precision altimeter, diving and multi-mode watches, in-building navigation, variometers / flight instruments



### MEAS MS5837

Package	Surface mountable
Type	Absolute
Pressure Range	0 - 30 bar
Output / Span	24-bit ADC I <sup>2</sup> C
Resolution	0.2 mbar
Unique Features	<ul style="list-style-type: none"> <li>• Supply voltage: 1.5 to 3.6 V</li> <li>• Excellent long term stability</li> <li>• Hermetically sealable for outdoor devices</li> <li>• Sealing designed for 1.8 x 0.88 mm o-ring</li> </ul>
Linearity/Absolute Accuracy	±400 mbar
Overpressure	50 bar
Operating Temp.	-20 to 85 °C
Dimensions (mm)	3.3 x 3.3 x 2.75
Typical Applications	Mobile water depth measurement systems, diving computers, adventure or multi-mode watches, data loggers



### MEAS MS5525DSO

Package	SOIC-14
Type	Gage, absolute, differential, compound
Pressure Range	0 - 1 to 30 psi
Output / Span	24-bit ADC SPI or I <sup>2</sup> C protocol
Resolution	—
Unique Features	<ul style="list-style-type: none"> <li>• 24-bit digital small outline sensor</li> <li>• Pressure and temperature measurement</li> <li>• Single supply of 1.8 or 3.6 VDC</li> <li>• Barb, tube and hole package style options</li> </ul>
Linearity/Absolute Accuracy	0.25% / 2.5% TEB
Overpressure	3X range
Operating Temp.	-40°C to 125°C
Dimensions (mm)	12.5 x 7.9
Typical Applications	Medical respirators, ventilators, factory automation, altitude and airspeed measurements, leak detection, home appliances



### MEAS MS5607, MS5611, MS5637

Package	Surface mountable
Type	Absolute
Pressure Range	10 - 2K mbar
Output / Span	24-bit ADC I <sup>2</sup> C
Resolution	0.016 mbar
Unique Features	<ul style="list-style-type: none"> <li>• 24-bit digital sensor</li> <li>• 13 cm resolution (MS5607, MS5637)</li> <li>• 10 cm resolution (MS5611)</li> <li>• Supply voltage: 1.5 to 3.6 V (MS5637) Supply voltage: 1.8 to 3.6 V (MS5607, MS5611)</li> <li>• Low power, 0.6 µA (Standby ≤ 0.1 µA at 25°C)</li> </ul>
Linearity/Absolute Accuracy	±2.0 mbar at 25°C
Overpressure	6 bar
Operating Temp.	-40 to 85°C
Dimensions (mm)	3 x 3 x 0.9 (MS5637) 5 x 3 x 1 (MS5607, MS5611)
Typical Applications	Smart phones, tablets, personal navigation devices, tire pressure monitoring, compressors



### MEAS MS5805

Package	Surface mountable
Type	Absolute
Pressure Range	10 - 2K mbar
Output / Span	24-bit ADC I <sup>2</sup> C
Resolution	0.02 mbar
Unique Features	<ul style="list-style-type: none"> <li>• 24-bit digital sensor</li> <li>• 20 cm resolution</li> <li>• Supply voltage: 1.8 to 3.6 V</li> <li>• Sealing designed for 2.5 x 1 mm o-ring</li> <li>• Silicone gel protection</li> <li>• Waterproof</li> </ul>
Linearity/Absolute Accuracy	±2.0 mbar at 25°C
Overpressure	5 bar
Operating Temp.	-40 to 85°C
Dimensions (mm)	4.5 x 4.5 x 3.5
Typical Applications	Mobile altimeter and barometer systems, bike computers, adventure or multi-mode watches, variometers, data loggers



### MEAS MS8607

Package	Surface mountable
Type	Absolute
Pressure Range	10 - 2K mbar
Output / Span	24 bit ADC I <sup>2</sup> C
Resolution	0.016 mbar
Unique Features	<ul style="list-style-type: none"> <li>• Integrated pressure, humidity and temperature</li> <li>• Supply voltage: 1.5 to 3.6 V</li> <li>• Fully factory calibrated sensor</li> </ul>
Linearity/Absolute Accuracy	±4 mbar
Overpressure	6 bar
Operating Temp.	-40°C to 85°C
Dimensions (mm)	5 x 3 x 1
Typical Applications	Smart phones, tablets, HVACR, weather stations, printers, home appliances and humidifiers

**BOARD LEVEL PRESSURE SENSORS**

Amplified Output



**MEAS MS4515, MS4525**

<b>Package</b>	8 pin DIL
<b>Type</b>	Gage, differential (MS4515) Gage, absolute, differential, compound (MS4525)
<b>Pressure Range</b>	0 - 2 to 30" H <sub>2</sub> O (MS4515) 0 - 1 to 150 psi (MS4525)
<b>Output / Span</b>	10% to 90% or 5% to 95% of supply
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Ratiometric analog output sensor</li> <li>• Single supply of either 3.3 or 5.0 VDC</li> <li>• Top, side barbed or manifold o-ring port</li> <li>• J lead or thru-hole pins</li> <li>• Optional gel coat</li> </ul>
<b>Accuracy</b>	0.25% span / 1% TEB
<b>Operating Temp.</b>	-10°C to 85°C (MS4515), -25°C to 105°C (MS4525)
<b>Dimensions (mm)</b>	12.5 x 9.9
<b>Typical Applications</b>	Medical instruments, air flow measurements, process control, leak detection



**MEAS MS5525ASO**

<b>Package</b>	SOIC-14
<b>Type</b>	Gage, absolute, differential, compound
<b>Pressure Range</b>	0 - 1 to 30 psi
<b>Output / Span</b>	10 - 90% VDC
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Temperature compensated</li> <li>• 2.75 to 5.5 VDC supply voltage</li> <li>• Amplified ratiometric analog output</li> <li>• Barb, tube and hole package style options</li> </ul>
<b>Accuracy</b>	±0.5% span / 2.5% TEB
<b>Operating Temp.</b>	-25°C to 105°C
<b>Dimensions (mm)</b>	12.5 x 7.9
<b>Typical Applications</b>	Factory automation, altitude and airspeed measurements, medical instruments, leak detection

mV Output



**MEAS 1210, 1220, 1230, 1240**

<b>Package</b>	8 pin DIL
<b>Type</b>	Gage, absolute, differential
<b>Pressure Range</b>	0 - 5 and 10" H <sub>2</sub> O 0 - 1 to 100 psi
<b>Output / Span</b>	50 mV and 100 mV typical
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Temperature compensated</li> <li>• High performance UltraStable die (1230, 1240)</li> <li>• Current excitation (1210, 1230)</li> <li>• Voltage excitation (1220, 1240)</li> </ul>
<b>Accuracy</b>	±0.1% non-linearity
<b>Operating Temp.</b>	-40°C to 125°C
<b>Dimensions (mm)</b>	15.2 x 14.7
<b>Typical Applications</b>	Medical instruments, air flow measurement, process control, factory automation, leak detection



**MEAS 13, 23, 33, 43, 17, 27, 37, 47**

<b>Package</b>	TO-8
<b>Type</b>	Gage, absolute, differential
<b>Pressure Range</b>	0 - 1 to 250 psi
<b>Output / Span</b>	100 mV typical
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Temperature compensated</li> <li>• High performance UltraStable die (17, 27, 37, 47)</li> <li>• Can gel fill for humid conditions</li> </ul>
<b>Accuracy</b>	±0.1% non-linearity
<b>Operating Temp.</b>	-40°C to 125°C
<b>Dimensions (mm)</b>	Ø11.4, application dependent
<b>Typical Applications</b>	Medical instruments, air flow measurement, HVACR, process control, factory automation, leak detection



**MEAS MS4425, MS4426**

<b>Package</b>	6 pin DIL
<b>Type</b>	Gage, absolute, differential
<b>Pressure Range</b>	0 - 1 to 300 psi
<b>Output / Span</b>	60 mV, 90 mV, 100 mV, and 150 mV typical
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Temperature compensated</li> <li>• High performance UltraStable die</li> <li>• Voltage excitation</li> </ul>
<b>Accuracy</b>	±0.1% non-linearity
<b>Operating Temp.</b>	-25°C to 85°C
<b>Dimensions (mm)</b>	15.2 x 13.7
<b>Typical Applications</b>	Drop-in for 6 pin industrial sensor for PCB mounted medical

## BOARD LEVEL PRESSURE SENSORS

mV Output



### MEAS MS1451, MS1471

<b>Package</b>	Surface mountable
<b>Type</b>	Gage, absolute
<b>Pressure Range</b>	0 - 5 to 500 psi
<b>Output / Span</b>	60 mV typical
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Low cost</li> <li>• Coarse calibrated at room temp. (MS1471)</li> <li>• With gel to protect against moisture</li> <li>• Tube or hole</li> </ul>
<b>Accuracy</b>	±0.25% non-linearity
<b>Operating Temp.</b>	-40°C to 125°C
<b>Dimensions (mm)</b>	7.6 x 7.6, application dependent
<b>Typical Applications</b>	Altitude measurement, barometric pressure, medical instrumentation, consumer appliances, tire pressure




### MEAS MS52xx, MS54xx

<b>Package</b>	Surface mountable
<b>Type</b>	Gage, absolute
<b>Pressure Range</b>	0 - 1 to 12 bar
<b>Output / Span</b>	150 mV, 240 mV
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Small size (MS54xx)</li> <li>• High linearity or high sensitivity options</li> <li>• Plastic tube or metal ring options</li> <li>• With gel to protect against moisture</li> <li>• High endurance (Option HM)</li> </ul>
<b>Accuracy</b>	±0.05%, ±0.15% FS non-linearity (MS52xx) ±0.05%, ±0.2% FS non-linearity (MS54xx)
<b>Operating Temp.</b>	-40°C to 125°C
<b>Dimensions (mm)</b>	7.6 x 7.6, application dependent (MS52xx) 6.4 x 6.2 (MS54xx)
<b>Typical Applications</b>	Absolute pressure sensor systems, engine controls, high resolution altimeters, variometers, waterproof watches, diver computers, barometers, tire pressure monitoring systems (TPMS), medical instrumentation, pneumatic controls

## DISPOSABLE MEDICAL PRESSURE SENSORS

mV Output



### MEAS 1620, 1630

<b>Package</b>	Hybrid assembly
<b>Type</b>	Gage
<b>Pressure Range</b>	-30 to 300 mmHg
<b>Output / Span</b>	5 $\mu$ V/V/mmHg
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Low cost, disposable design</li> <li>• Supplied in tape and reel</li> <li>• Compliant to AAMI spec</li> <li>• ISO13485 certified</li> </ul>
<b>Accuracy</b>	±1.0% FSO
<b>Operating Temp.</b>	10°C to 40°C
<b>Dimensions (mm)</b>	1620: 11.43 x 8.13 x 4.20 1630: 12.7 x 5.08 x 3.94
<b>Typical Applications</b>	Disposable blood pressure, surgical procedures, ICU, kidney dialysis machines, medical instrumentation



### MEAS Fully Assembled 1620 (Customized per customer specifications)

<b>Package</b>	Plastic housing
<b>Type</b>	Gage
<b>Pressure Range</b>	-30 to 300 mmHg
<b>Output / Span</b>	5 $\mu$ V/V/mmHg
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Low cost, disposable design</li> <li>• Compliant to AAMI spec</li> <li>• Custom designs available</li> </ul>
<b>Accuracy</b>	±1.0% FSO
<b>Operating Temp.</b>	10°C to 40°C
<b>Dimensions (mm)</b>	42.8 x 30.3 x 19.0
<b>Typical Applications</b>	Disposable blood pressure, kidney dialysis machines, surgical procedures and intensive care units. Ready to use, fully assembled disposable sensor units with cable, connector, stop cock, flush device in a plastic housing.

## MEDIA ISOLATED PRESSURE SENSOR MODULES

Digital Output



### MEAS 85BSD

Package	<ul style="list-style-type: none"> <li>• 13 mm diaphragm diameter</li> <li>• Weldable or threaded process fittings</li> </ul>
Type	Gage, absolute
Pressure Range	0 - 0.35 to 20 bar / 0 - 5 to 300 psi
Output / Span	14-bit ADC I <sup>2</sup> C or SPI
Unique Features	<ul style="list-style-type: none"> <li>• Pressure and temperature read-out</li> <li>• Cable and connector options</li> <li>• Low power option</li> </ul>
Accuracy	±0.25% span
Total Error Band	±1.0% FSO
Overpressure	2X
Operating Temp.	-40°C to 125°C
Dimensions (mm)	Ø15.85 x 7.9
Typical Applications	Level controls, tank level measurement, corrosive fluids and gas measurement systems, sealed systems, manifold pressure measurement, submersible depth monitoring



### MEAS 86BSD

Package	<ul style="list-style-type: none"> <li>• 16 mm diaphragm diameter</li> <li>• O-ring mount</li> </ul>
Type	Gage, absolute
Pressure Range	0 - 0.07 to 20 bar / 0 - 1 to 300 psi
Output / Span	14-bit ADC I <sup>2</sup> C or SPI
Unique Features	<ul style="list-style-type: none"> <li>• Pressure and temperature read-out</li> <li>• Cable and connector options</li> <li>• Low power option</li> </ul>
Accuracy	±0.25% span
Total Error Band	±1.0% FSO
Overpressure	2X
Operating Temp.	-40°C to 125°C
Dimensions (mm)	Ø15.82 x 9.3
Typical Applications	Level controls, tank level measurement, corrosive fluids and gas measurement systems, sealed systems, manifold pressure measurement, submersible depth monitoring



### MEAS 89BSD

Package	<ul style="list-style-type: none"> <li>• 9 mm diaphragm diameter</li> <li>• Threaded or weldable</li> </ul>
Type	Absolute, sealed gage
Pressure Range	0 - 6 to 30 bar
Output / Span	24-bit ADC I <sup>2</sup> C
Unique Features	<ul style="list-style-type: none"> <li>• Pressure and temperature read-out</li> <li>• Low power: 1 µA (Standby &lt; 0.15 µA)</li> <li>• Low power option</li> </ul>
Accuracy	±0.3% span
Total Error Band	±3.0% FSO max.
Overpressure	2X
Operating Temp.	-40°C to 85°C
Dimensions (mm)	Ø9.04 x 7.5
Typical Applications	Level controls, tank level measurement, corrosive fluids and gas measurement systems, sealed systems, manifold pressure measurement, dive computers



### MEAS 154BSD

Package	<ul style="list-style-type: none"> <li>• 19 mm diaphragm diameter</li> <li>• O-ring mount</li> </ul>
Type	Gage, absolute
Pressure Range	0 - 1 to 300 psi
Output / Span	14-bit ADC I <sup>2</sup> C or SPI
Unique Features	<ul style="list-style-type: none"> <li>• Pressure and temperature read-out</li> <li>• Cable and connector options</li> <li>• Low power option</li> </ul>
Accuracy	±0.25% span
Total Error Band	±1.0% FSO
Overpressure	2X
Operating Temp.	-40°C to 125°C
Dimensions (mm)	Ø19 x 13.8
Typical Applications	Level controls, tank level measurement, corrosive fluids and gas measurement systems, sealed systems, manifold pressure measurement, submersible depth monitoring

## MEDIA ISOLATED PRESSURE SENSOR MODULES

Analog Output



### MEAS 82, 85 with Fittings

Package	Weldable (85) or process fitting
Type	Gage, absolute, vacuum gage
Pressure Range	0 - 5 to 500 psi (85) 0 - 1 to 500 psi (82)
Output / Span	100 mV typical
Unique Features	<ul style="list-style-type: none"> <li>• Modular design</li> </ul>
Non-linearity	±0.3% FSO (1 psi) ±0.2% FSO (5 psi) ±0.1% FSO (≥15 psi)
Operating Temp.	-40°C to 125°C
Dimensions (mm)	Fittings: application dependent
Typical Applications	Medical, process control, refrigeration compressor, oceanography, level systems



### MEAS 89 Button, 89 with Fittings

Package	Weldable or process fitting
Type	Sealed gage, absolute
Pressure Range	0 - 1K to 10K psi
Output / Span	100 mV typical
Unique Features	<ul style="list-style-type: none"> <li>• High pressure</li> <li>• Modular design</li> </ul>
Non-linearity	±0.25% FSO
Operating Temp.	-40°C to 125°C
Dimensions (mm)	89 Button: Ø9.04 x 13.2 89 with Fittings: application dependent
Typical Applications	Air tank pressure, hydraulics, process control, robotics, refrigeration compressors, oceanography



### MEAS 86A Amplified

Package	5/8" (16 mm) diameter o-ring mount
Type	Gage, absolute
Pressure Range	0 - 1 to 150 psi
Output / Span	0.5 - 4.5 VDC
Unique Features	<ul style="list-style-type: none"> <li>• Small diameter, amplified output</li> <li>• Bar ranges available</li> </ul>
Non-linearity	±1.0% FSO
Operating Temp.	-20°C to 85°C
Dimensions (mm)	Ø15.82 x 9.3
Typical Applications	Level measurement, OEM transmitters and transducers, process control

## MEDIA ISOLATED PRESSURE SENSOR MODULES

Analog Output



### MEAS 82, 85, 85F, 86, 154N

<b>Package</b>	<ul style="list-style-type: none"> <li>• 3/4" (19 mm) diameter o-ring mount (82, 154N)</li> <li>• 5/8" (16 mm) diameter o-ring mount (86)</li> <li>• 1/2" (13 mm) diameter o-ring flush mount (85F)</li> <li>• 1/2" (13 mm) diameter o-ring mount (85)</li> </ul>
<b>Type</b>	Gage, absolute, vacuum gage (82, 85, 86, 154N) Gage, absolute (85F)
<b>Pressure Range</b>	0 - 1 to 500 psi (Absolute, gage: 82, 154N) 0 - 5 to 500 psi (Absolute, gage: 85, 86) 0 - 15 to 500 psi (85F, vacuum gage: 82, 85, 86, 154N)
<b>Output / Span</b>	100 mV typical
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• High performance</li> <li>• High stability for OEM applications</li> <li>• Minimizes trapped volume (85F)</li> </ul>
<b>Non-linearity</b>	±0.3% FSO (1 psi), ±0.2% FSO (5 psi) ±0.1% FSO (≥15 psi), ±0.1% FSO (85F)
<b>Operating Temp.</b>	-40°C to 125°C (82 / 85 / 86 / 154N), -20°C to 125°C (85F)
<b>Dimensions (mm)</b>	82: Ø19 x 6.48      86: Ø15.82 x 11.4 154N: Ø18.97 x 13.8      85F: Ø17.2 x 11.33 85: Ø15.85 x 9.3
<b>Typical Applications</b>	Hydraulic controls, process control, oceanography, refrigeration/compressors, pressure transmitters, level systems, dialysis machines, infusion pumps, medical systems



### MEAS DP86 O-Ring Mount, with Fittings/Cable

<b>Package</b>	• 5/8" (16 mm) diameter o-ring mount or threaded process fittings
<b>Type</b>	Differential
<b>Pressure Range</b>	0 - 1 to 500 psi
<b>Output / Span</b>	100 mV typical / sensitivity dependent
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Wet/wet differential pressure</li> <li>• Line pressure max. 1000 psi</li> </ul>
<b>Non-linearity</b>	±0.3% FSO (1 psi) ±0.2% FSO (5 psi) ±0.1% FSO (≥15 psi)
<b>Operating Temp.</b>	-40°C to 125°C
<b>Dimensions (mm)</b>	O-ring: Ø15.82 x 17.5 Fittings: Application dependent
<b>Typical Applications</b>	Level controls, tank level measurement, corrosive fluids and gas measurement systems, flow measurement



### MEAS U86B

<b>Package</b>	• Mountable with o-ring seal
<b>Type</b>	Sealed gage, absolute
<b>Pressure Range</b>	0 - 5 to 13 bar / 0 - 50 to 200 psi
<b>Output / Span</b>	0.5 - 4.5 VDC (Ratiometric output)
<b>Unique Features</b>	• Amplified
<b>Non-linearity</b>	±0.5% FSO
<b>Operating Temp.</b>	-7°C to 105°C
<b>Dimensions (mm)</b>	Ø15.82 x 13.6 Socket spacing: 31.75
<b>Typical Applications</b>	Urea level, urea pressure, air brakes, corrosive fluid measurement for E&V applications

## TRANSDUCERS AND TRANSMITTERS

Wireless



### MEAS M5600, U5600

<b>Type</b>	Gage, sealed, absolute, compound
<b>Pressure Range</b>	0 - 50 to 15K psi (M5600) 0 - 5 to 10K psi (U5600)
<b>Output / Span</b>	24-bit ADC I <sup>2</sup> C
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Pressure and temperature</li> <li>• 2.3 - 3.6 V supply voltage</li> <li>• Compact and battery-powered</li> <li>• Weather resistant (IP66 and IP67)</li> <li>• Stainless steel and polycarbonate enclosure</li> </ul>
<b>Accuracy</b>	±0.25% FS (M5600) Down to ±0.1% FS (U5600)
<b>Operating Temp.</b>	-20°C to 85°C
<b>Dimensions (mm)</b>	24 x 24 x 69
<b>Typical Applications</b>	Industrial process control and monitoring, advanced HVACR systems, refrigeration systems, automotive test stands, off-road vehicles, pumps and compressors, hydraulic and pneumatic systems, agriculture equipment, energy generation and management
<b>Agency Approvals</b>	CE, FCC

Industrial



### MEAS MSP100

<b>Type</b>	Gage
<b>Pressure Range</b>	0 - 100 to 500 psi
<b>Output / Span</b>	100 mV typical
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Microfused</li> <li>• Low cost stainless steel isolated transducer</li> <li>• No threads needed for pressure connect</li> <li>• Highly customized for OEM application</li> <li>• Small size</li> <li>• Solid state reliability</li> </ul>
<b>Accuracy</b>	±0.5% FSO
<b>Operating Temp.</b>	0°C to 55°C
<b>Dimensions (mm)</b>	12.7 x 24.38 x 20.32
<b>Typical Applications</b>	Beverage dispensing systems, automation, HVACR controls, energy and water management, pumps, compressors, pneumatic equipment
<b>Agency Approvals</b>	—



### MEAS MSP300, MSP340

<b>Type</b>	Gage
<b>Pressure Range</b>	0 - 100 to 10K psi (MSP300) 0 - 50 to 10K psi (MSP340)
<b>Output / Span</b>	0 - 100 mV, 0.5 - 4.5 VDC, 1 - 5 VDC, 4 - 20 mA
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Microfused</li> <li>• Highly customized for OEM applications</li> <li>• Small size</li> <li>• Solid state reliability</li> </ul>
<b>Accuracy</b>	±1% FSO
<b>Operating Temp.</b>	-20°C to 85°C
<b>Dimensions (mm)</b>	MSP300: 22.23 x 22.23 x 55.88 MSP340: 15.88 x 15.88 x 75.44
<b>Typical Applications</b>	Paint sprayers, braking systems, HVACR controls, energy and water management, pumps, compressors, pneumatic equipment, off road heavy equipment, agriculture equipment
<b>Agency Approvals</b>	UL 508 (MSP300)

TRANSDUCERS AND TRANSMITTERS

Industrial



**MEAS US300**

Type	Gage, absolute
Pressure Range	0 - 15 to 5K psi
Output / Span	0 - 10 mV/V, 0.5 - 4.5 V, 1 - 5 V, 4 - 20 mA
Unique Features	<ul style="list-style-type: none"> <li>• UltraStable technology</li> <li>• Highly customized for OEM applications</li> <li>• Small size</li> <li>• Solid state reliability</li> </ul>
Accuracy	±0.15% FSO (15 - 1K psi), ±0.25% FSO (>1K psi)
Operating Temp.	-40°C to 105°C
Dimensions (mm)	15.88 x 15.88 x 98.00
Typical Applications	Paint sprayers, braking systems, HVACR controls, energy and water management, pumps, compressors, pneumatic equipment, off road heavy equipment, agriculture equipment
Agency Approvals	—



**AST20HA, AST20PT, AST20SW**

Type	Gage, sealed gage, absolute
Pressure Range	0 - 1 to 60K psi
Output / Span	0.5 - 4.5 V [Ratiometric] 1 - 5 V, 4 - 20 mA, 0 - 5 V, 0 - 10 V, switch (AST20SW)
Unique Features	<ul style="list-style-type: none"> <li>• Excellent performance over temperature</li> <li>• Semi-custom designs available</li> <li>• Fault mode condition settings</li> <li>• Four standard sensor material options</li> <li>• Additional temperature output (AST20PT)</li> </ul>
Accuracy	±0.1% FSO
Operating Temp.	-40°C to 85°C
Dimensions (mm)	Application dependent
Typical Applications	Test and measurement, industrial controls
Agency Approvals	ABS, CE



**AST4000**

Type	Gage, sealed gage, compound
Pressure Range	0 - 25 to 10K psi
Output / Span	0.5 - 4.5 V [Ratiometric], 1 - 5 V, 1 - 10 V, 4 - 20 mA, 0.5 - 2.5 V
Unique Features	<ul style="list-style-type: none"> <li>• Four standard sensor material options</li> <li>• Rugged construction</li> <li>• 100 V/m EMI/RFI protection</li> <li>• Semi-custom designs available</li> </ul>
Accuracy	±0.5% FSO
Operating Temp.	-40°C to 85°C
Dimensions (mm)	Application dependent
Typical Applications	Water, hydraulic equipment, HVACR, industrial controls
Agency Approvals	UL/cUL508, ABS, CE



**MEAS M5200**

Type	Gage, sealed, compound
Pressure Range	0 - 3.5 to 1K bar / 0 - 50 to 15K psi
Output / Span	0.5 - 4.5 V, 1 - 5 V, 0 - 5 V, 0 - 10 V, 4 - 20 mA, 1 - 6 V
Unique Features	<ul style="list-style-type: none"> <li>• Microfused technology</li> <li>• High performance at a low cost</li> <li>• Solid state reliability</li> <li>• ±1% FSO TEB (-20°C to 85°C)</li> <li>• Weatherproof</li> <li>• 17 - 4 PH or 316L SS</li> </ul>
Accuracy	±0.25% FSO
Operating Temp.	-40°C to 125°C
Dimensions (mm)	24 X 24 X 82 max.
Typical Applications	Industrial process control and monitoring, advanced HVACR systems, refrigeration systems, automotive test stands, off road vehicles, pumps and compressors, hydraulic and pneumatic systems, agriculture equipment, energy generation and management
Agency Approvals	CE (EMC)



**MEAS U5200, U5300**

Type	Gage, sealed, absolute, compound
Pressure Range	0 - 0.14 to 700 bar / 0 - 2 to 10K psi
Output / Span	0.5 - 4.5 V, 1 - 5 V, 0 - 5 V, 0 - 10 V, 4 - 20 mA, 1 - 6 V
Unique Features	<ul style="list-style-type: none"> <li>• UltraStable technology</li> <li>• High performance at a low cost</li> <li>• ±0.75% FSO TEB (-20°C to 85°C, &gt;5 psi and ≤5000 psi) (U5200)</li> <li>• ±0.5% FSO TEB (-20°C to 85°C) (U5300)</li> <li>• Weatherproof</li> <li>• High accuracy (U5300)</li> </ul>
Accuracy	±0.1% FSO (>5 and ≤500 psi)
Operating Temp.	-40°C to 125°C
Dimensions (mm)	24 X 24 X 82 max.
Typical Applications	Industrial process control and monitoring, advanced HVACR systems, refrigeration systems, automotive test stands, off road vehicles, pumps and compressors, hydraulic and pneumatic systems, agriculture equipment, energy generation and management, military and aerospace test stands, calibration equipment, high accuracy applications, stationary motor fuel control, high end industry machinery
Agency Approvals	CE (EMC), UL 508



**MEAS D5100**

Type	Differential wet/wet
Pressure Range	0 - 0.07 to 35 bar / 0 - 1 to 500 psi
Output / Span	80 mV / 100 mV, 0.5 - 4.5 VDC, 1 - 5 VDC, 4 - 20 mA
Unique Features	<ul style="list-style-type: none"> <li>• UltraStable technology</li> <li>• High performance at a low cost</li> <li>• Solid state reliability</li> <li>• ±1% FSO TEB (-20°C to 85°C)</li> <li>• Line pressure max. 1000 psi</li> </ul>
Accuracy	±0.3% FSO (<5 psi), ±0.25% FSO (5 psi), ±0.1% FSO (≥15 psi)
Operating Temp.	-40°C to 125°C
Dimensions (mm)	25.4 x 58.4 x 72.0
Typical Applications	Process controls, tank level measurement, filter performance monitoring, corrosive fluids and gas measurement systems, flow measurement
Agency Approvals	CE (EMC)



## TRANSDUCERS AND TRANSMITTERS

### Industrial



#### MEAS M7100, U7100

<b>Type</b>	Gage, no vent gage (M7100) Gage, sealed gage, absolute (U7100)
<b>Pressure Range</b>	0 - 10 to 700 bar / 0 - 150 to 10K psi (M7100) 0 - 1 to 10 bar / 0 - 15 to 150 psi (U7100)
<b>Output / Span</b>	0.5 - 4.5 VDC [Ratiometric output] 1 - 5 VDC [Regulated] (M7100) 0.5 - 4.5 VDC [Ratiometric output] (U7100)
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• ±1% FSO TEB (-20°C to 85°C)</li> <li>• Solid state reliability</li> <li>• Survives high vibration and immersion</li> <li>• Microfused technology (M7100)</li> <li>• UltraStable technology (U7100)</li> <li>• Copper tube for HVACR (M7100)</li> </ul>
<b>Accuracy</b>	0.25% FSO
<b>Operating Temp.</b>	-40°C to 125°C
<b>Dimensions (mm)</b>	26.7 x 26.7 x 50.0
<b>Typical Applications</b>	HVACR refrigeration controls, off road vehicles engine control, compressors, hydraulic, energy and water management
<b>Agency Approvals</b>	CE (EMC), UL 508

### Heavy Industrial



#### MEAS P900, P981, P1200, P700, P9000

<b>Type</b>	Gage, absolute
<b>Pressure Range</b>	0 - 5 bar to 700 bar / 0 - 75 to 10K psi
<b>Output / Span</b>	0 - 5 VDC, 0 - 10 VDC, 4 - 20 mA
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• High overpressure (10X over pressure)</li> <li>• Shock and vibration resistant</li> <li>• Heavy industrial grade transducer (P9000)</li> <li>• Advanced digital compensation / calibration</li> <li>• Mechanical over pressure stops</li> <li>• High temperature operation</li> </ul>
<b>Accuracy</b>	0.1% to 0.2% FSO
<b>Operating Temp.</b>	-54°C to 120°C
<b>Dimensions (mm)</b>	Application dependent
<b>Typical Applications</b>	Steel mills, hydraulic controls, power generation equipment, torpedo depth, military and aerospace, vehicle braking systems
<b>Agency Approvals</b>	CE, CENELEC (Intrinsically Safe)



#### MEAS P101, P105, P125

<b>Type</b>	Gage
<b>Pressure Range</b>	0 - 10 to 7K bar / 0 - 150 to 100K psi
<b>Output / Span</b>	7.5 to 20 mV (4 V; 5 V optional)
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Stainless steel diaphragm</li> <li>• Female pressure connectors: M16 x 1.5, M20 x 1.5, 1/4 NPT</li> <li>• Metal to metal seal</li> </ul>
<b>Accuracy</b>	±0.3% FSO
<b>Operating Temp.</b>	-20°C to 80°C
<b>Dimensions (mm)</b>	Ø29 x 85 max.
<b>Typical Applications</b>	Harsh environments, aggressive liquids
<b>Agency Approvals</b>	—

## TRANSDUCERS AND TRANSMITTERS

### Miniature



#### MEAS XP Series

<b>Type</b>	Gage, sealed, absolute
<b>Pressure Range</b>	0 - 1 to 350 bar / 0 - 15 to 5K psi (XP5, XPM10) 0 - 5 to 200 bar / 0 - 75 to 3K psi (XPM4) 0 - 100 to 1K bar / 0 - 1.5K to 15K psi (XPM6)
<b>Output / Span</b>	20 - 100 mV, 4 V FSO (Amplified)
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Titanium construction (XP5, XPM4)</li> <li>• Stainless steel housing (XPM6, XPM10)</li> <li>• Amplified output options (XP5, XPM6, XPM10)</li> <li>• Cable and connector options</li> <li>• For static and dynamic applications</li> </ul>
<b>Accuracy</b>	Down to ±0.25% FSO (XP5, XPM6, XPM10), down to ±0.35% FSO (XPM4)
<b>Operating Temp.</b>	-40°C to 120°C
<b>Dimensions (mm)</b>	XPM4: M4 x 0.7 thread; Hex 8 XP5: M5 x 0.8 or 10-32 UNF thread; Hex 10 XPM6: M6 x 1 thread; Hex 12 XPM10: M10 x 1 thread; Hex 15
<b>Typical Applications</b>	Corrosive liquids and gases, braking system pressure, onboard equipment monitoring, military and aerospace, explosive test benches, robotics and effectors, laboratory and research, extreme miniature devices



#### MEAS XPC10

<b>Type</b>	Gage, sealed, absolute
<b>Pressure Range</b>	0 - 10 to 500 bar / 0 - 150 to 7.5K psi
<b>Output / Span</b>	12 mV FSO, 4 V FSO (Amplified)
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Amplified output available</li> <li>• For static and dynamic applications</li> <li>• Optional IP67 ingress protection</li> <li>• High temperature operation</li> </ul>
<b>Accuracy</b>	Down to ±0.25% FSO
<b>Operating Temp.</b>	-40°C to 220°C
<b>Dimensions (mm)</b>	M10 x 1 or 3/8-24 UNF thread; Hex 15
<b>Typical Applications</b>	Aerospace, test benches, oven monitoring equipment, cooling regulation systems

TRANSDUCERS AND TRANSMITTERS

Miniature



**MEAS EB, EPRB**

Type	Gage, sealed, absolute
Pressure Range	0 - 0.35 to 700 bar / 0 - 5 to 10K psi
Output / Span	0.5 to 4.5 VDC
Unique Features	<ul style="list-style-type: none"> <li>• High accuracy</li> <li>• Miniature design</li> <li>• UltraStable technology</li> <li>• EMI protected</li> <li>• Combined pressure and temperature</li> </ul>
Accuracy	±0.25% FSO
Operating Temp.	-40°C to 125°C (Available option up to 150°C)
Dimensions (mm)	11 body diameter
Typical Applications	Motor sport, hydraulic / pneumatic systems, automotive test stands, military and aerospace test stands
Agency Approvals	CE (EMC)



**MEAS EPIH**

Type	Gage, sealed, absolute
Pressure Range	0 - 0.35 to 20 bar / 0 - 5 to 300 psi
Output / Span	12 mV to 75 mV
Unique Features	<ul style="list-style-type: none"> <li>• Diffused silicon diaphragm with a large variety of sizes and shapes available as small as 0.05" outside diameter</li> <li>• High frequency response (To 1.7 MHz)</li> <li>• Ultra-miniature design</li> </ul>
Accuracy	±1.0% FSO
Operating Temp.	-40°C to 120°C
Dimensions (mm)	Application dependent
Typical Applications	Aerospace testing, wind tunnels, biomedical testing, aircraft body and wing dynamics, high frequency measurements
Agency Approvals	—



**MEAS EPB, EPB-PW, EPL**

Type	Gage, sealed, absolute
Pressure Range	0 - 0.35 to 350 bar / 0 - 5 to 5K psi
Output / Span	10 mV to 125 mV
Unique Features	<ul style="list-style-type: none"> <li>• Miniature flush mountable</li> <li>• Flush stainless steel diaphragm, flanged or non-flanged</li> <li>• Bonded silicon gage, high frequency response (To 400 KHz)</li> <li>• IP68 ingress protection in Titanium construction (EPB-PW)</li> </ul>
Accuracy	±0.5 to ±1% FSO
Operating Temp.	-40°C to 120°C
Dimensions (mm)	3.2 to 7 outside diameter
Typical Applications	Air flow testing, hydraulic pressure systems, air pressure systems, bearing studies, ballistics, water hammer, miniature scale model testing, centrifuge pore water pressure measurements
Agency Approvals	—

TRANSDUCERS AND TRANSMITTERS

Liquid Level



**MEAS U5700**

Type	Gage, sealed, absolute, compound
Pressure Range	0 - 2 to 10K psi
Output / Span	0.5 - 4.5 V, 1 - 5 V, 0 - 5 V, 0 - 10 V, 4 - 20 mA, 1 - 6 V
Unique Features	<ul style="list-style-type: none"> <li>• UltraStable technology</li> <li>• High accuracy</li> <li>• IP68 rated connection and submersible polyurethane jacketed cable</li> <li>• Optional Polyoxymethylene cap</li> </ul>
Accuracy	0.1 % FSO
Operating Temp.	-10°C to 60°C
Dimensions (mm)	22.23 x 22.23 x 98.04
Typical Applications	Industrial process control and monitoring, advanced HVACR systems, refrigeration systems, automotive test stands, off road vehicles, pumps and compressors, hydraulic / pneumatic systems, agriculture equipment, energy generation and management, liquid level applications
Agency Approvals	CE (EMC)



**AST45xx**

Type	Gage, absolute
Pressure Range	0 - 1 to 100 psi (AST4500, AST4510, AST4520)
Output / Span	0.5 - 4.5 V [Ratiometric], 1 - 5 V, 4 - 20 mA, 0.5 - 2.5 V
Unique Features	<ul style="list-style-type: none"> <li>• Intrinsically safe ratings</li> <li>• Material options including: 316L, alloy C276, and PVDF</li> <li>• Low power options</li> <li>• High quality cable options</li> </ul>
Accuracy	±0.25% FSO
Operating Temp.	-40°C to 85°C
Dimensions (mm)	Application dependent
Typical Applications	Diesel tanks, chemical tanks, water tanks
Agency Approvals	UL/CSA Class I Div I, ATEX/IECEX Exia, ABS, CE

## TRANSDUCERS AND TRANSMITTERS

### Hazardous Location



#### AST43xx, AST44xx

<b>Type</b>	Gage, sealed gage, compound, absolute
<b>Pressure Range</b>	0 - 1 to 15 psi (AST43LP, AST44LP) 0 - 25 to 20K psi (AST4300, AST4400, AST4401)
<b>Output / Span</b>	0.5 - 4.5 V [Ratiometric], 1 - 5 V, 4 - 20 mA, 0.5 - 2.5 V
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Available with 316L, alloy C276, or alloy 718 materials</li> <li>• Low current consumption options</li> <li>• Low power options</li> <li>• High proof and burst pressure</li> </ul>
<b>Accuracy</b>	±0.25% FSO
<b>Operating Temp.</b>	-40°C to 85°C
<b>Dimensions (mm)</b>	Application dependent
<b>Typical Applications</b>	Compressors, well sites, ships, factory automation, SCADA equipment, offshore equipment
<b>Agency Approvals</b>	UL/CSA Class I Div I and II, ATEX/IECEX Exia/Exn, CCOE, CNEX, ABS, CE



#### AST46xx

<b>Type</b>	Gage, sealed gage, compound, absolute
<b>Pressure Range</b>	0 - 1 to 20K psi
<b>Output / Span</b>	0.5 - 4.5 V [Ratiometric], 1 - 5 V, 4 - 20 mA, 0.5 - 2.5 V, switch (AST46SW)
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Available with 316L, alloy C276, or alloy 718 materials</li> <li>• Low current consumption options</li> <li>• Low power options</li> <li>• Local display (AST46DS)</li> <li>• Additional temperature output</li> </ul>
<b>Accuracy</b>	±0.25% FSO (AST4600, AST46DS), ±0.1% FSO (AST46HA, AST46PT)
<b>Operating Temp.</b>	-40°C to 85°C
<b>Dimensions (mm)</b>	Application dependent
<b>Typical Applications</b>	SCADA/RTU, well sites, offshore equipment, hydraulic controls
<b>Agency Approvals</b>	CSA Class I/II Div I, ATEX/IECEX Exd, ABS, CE



#### AST5100, AST5300, AST5400

<b>Type</b>	Differential
<b>Pressure Range</b>	0 - 5 H <sub>2</sub> O" to 5K psi
<b>Output / Span</b>	0.5 - 4.5 V [Ratiometric], 0 - 5 V, 1 - 5 V, 4 - 20 mA
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Wide range of pressures available</li> <li>• Full line pressure on either side without zero shifts</li> <li>• Hazardous location approvals (AST5300, AST5400)</li> </ul>
<b>Accuracy</b>	±0.25% FSO (AST5100, AST5300), 1% TEB (AST5400)
<b>Operating Temp.</b>	-40°C to 85°C
<b>Dimensions (mm)</b>	Application dependent
<b>Typical Applications</b>	Filter monitoring, flow measurement, tank level measurement
<b>Agency Approvals</b>	CSA Class I/II Div I and II, ATEX/IECEX Exd/Exn, ABS, CE

# RATE AND INERTIAL SENSORS

TE Connectivity is a proven leader in providing electronic test and measurement solutions and inertial sensors for demanding industrial, military, aerospace, and research applications. Our accurate, rugged, and easy-to-use line of MEMS accelerometers, rate gyros, and inertial measurement systems meet the complex measurement needs of OEMs as well as test and measurement labs worldwide.



## GYROS, ANGULAR RATE SENSORS

Plug and Play



### MEAS GY407D

Package	Anodized aluminum
FS Range (°/s)	±300
Unique Features	<ul style="list-style-type: none"> <li>• Digital output</li> <li>• Built-in analyses</li> <li>• Dynamic interface</li> <li>• Performance over temperature</li> </ul>
Accuracy	±1.0% non-linearity
Excitation Voltage	8.5 - 36 VDC
Operating Temp.	-40°C to 85°C
Dimensions (mm)	36.50 x 25.40 x 17.50
Typical Applications	Non-navigation heading, vehicle dynamics, test and measurement



### MEAS 11206AC

Package	Anodized aluminum
FS Range (°/s)	±50, 180, 300, 600
Unique Features	<ul style="list-style-type: none"> <li>• IdentiCal interchangeable sensor</li> <li>• Best performance over temperature</li> <li>• Gain and offset compensation</li> <li>• Expanded environmental tests</li> </ul>
Accuracy	±0.1% non-linearity
Excitation Voltage	8.5 - 36 VDC
Operating Temp.	-40°C to 85°C
Dimensions (mm)	24 x 24 x 27.30
Typical Applications	Wind turbine, weapons testing, test and measurement



### MEAS 11207AC

Package	Anodized aluminum
FS Range (°/s)	±250, 300, 450
Unique Features	<ul style="list-style-type: none"> <li>• IdentiCal interchangeable sensor</li> <li>• High stability</li> <li>• Low noise</li> <li>• Vibration-rejecting</li> </ul>
Accuracy	±0.01% non-linearity
Excitation Voltage	10 - 36 VDC
Operating Temp.	-40°C to 85°C
Dimensions (mm)	24 x 24 x 27.30
Typical Applications	Wind turbine, weapons testing, test and measurement



### MEAS 3120XB

Package	Anodized aluminum
FS Range (°/s)	±50, 150, 300, 600, 1000, 1200
Unique Features	<ul style="list-style-type: none"> <li>• Performance over temperature</li> <li>• Rugged packaging</li> <li>• Power supply regulation</li> <li>• Temperature calibration data</li> </ul>
Accuracy	±0.1% non-linearity
Excitation Voltage	8.5 - 36 VDC
Operating Temp.	-40°C to 85°C
Dimensions (mm)	24 x 24 x 28.30
Typical Applications	Weapons testing, boat stabilization, test and measurement



### MEAS 65210E

Package	Anodized aluminum
FS Range (°/s)	Up to ±20K on roll axis
Unique Features	<ul style="list-style-type: none"> <li>• Complete six-degree of freedom (6DoF) and TM kit</li> <li>• External inputs</li> <li>• User configurable</li> <li>• Self-powered</li> </ul>
Accuracy	Up to ±0.1% non-linearity
Excitation Voltage	8.5 to 36 VDC
Operating Temp.	-40°C to 85°C
Dimensions (mm)	Ø69.85 x 201.42 length
Typical Applications	Weapons separation testing, captive carry testing



### MEAS 620

Package	Anodized aluminum
FS Range (°/s)	±500, 1500, 6000, 12K, 18K, 24K, 50K
Unique Features	<ul style="list-style-type: none"> <li>• Small, lightweight package</li> <li>• Insensitive to shock</li> <li>• SAEJ211 compliant</li> </ul>
Accuracy	±0.5% non-linearity
Excitation Voltage	5 - 16 VDC
Operating Temp.	-40°C to 105°C
Dimensions (mm)	16.5 x 11.4 x 7.9
Typical Applications	Automotive safety crash testing, roll-over testing, motor sports, biomechanics, weapons testing



### MEAS 603

Package	Anodized aluminum
FS Range (°/s)	±500, 1500, 6000, 12K, 18K, 24K
Unique Features	<ul style="list-style-type: none"> <li>• MEMS triaxial rate sensor</li> <li>• SAEJ211 compliant</li> <li>• Shock resistant housing</li> </ul>
Accuracy	±0.5% non-linearity
Excitation Voltage	5 - 16 VDC
Operating Temp.	-40°C to 105°C
Dimensions (mm)	20.8 x 20.8 x 14.5
Typical Applications	Automotive safety crash testing, pedestrian impact, biomechanics, robotics



### MEAS 633, 634

Package	Stainless steel
FS Range (°/s)	±100, 500, 1500, 6000, 12K, 18K, 24K
Unique Features	<ul style="list-style-type: none"> <li>• 6DoF analog sensor</li> <li>• Rugged, compact housing</li> <li>• Signal conditioned</li> </ul>
Accuracy	±0.5% non-linearity
Excitation Voltage	5 - 16 VDC
Operating Temp.	-40°C to 105°C
Dimensions (mm)	21.3 x 21.3 x 15.2
Typical Applications	Aerospace testing, weapons testing, biomechanics, shock and impact testing

# SCANNERS AND SYSTEMS

The test and measurement group of TE Connectivity provides data systems based on the electronic pressure and temperature scanners of legacy brand Pressure Systems (PSI). These products have been developed specifically for wind tunnel testing, flight testing and turbomachinery test and measurement applications. Extensive factory calibration combined with custom MEMS-like technology provide system solutions with high accuracy digital interface to host computers and networks. Pressure ranges are available from 1.3" H<sub>2</sub>O (300 Pa) to 10,000 psi (69 MPa). Temperature inputs can be acquired from standard and custom thermocouples as well as RTDs. Software is included with each solution.



## PRESSURE AND TEMPERATURE

NetScanner Complete Data Acquisition Devices



**MEAS 9116**



**MEAS 9146-R**



**MEAS 9146-T**



**MEAS 9022**

Measurement Type	Pressure	Temperature	Temperature	Pressure
Media	Dry	RTD / TC / Volt	TC	Liquid
Accuracy	±0.05% FS	±0.25°C	±0.25°C	±0.05% FS
# of Channels	16	16 / 32	16	12
EU Throughput Rate	500 Hz	33 Hz	33 Hz	100 Hz
Enclosure	IP66 / 30 g vibration	IP66 / 30 g vibration	IP54 / 30 g vibration	IP64 / 30 g vibration
Typical Applications	Engine testing, portable data acquisition, wind tunnel research, process monitoring	Engine testing, portable data acquisition, wind tunnel research, process monitoring	Engine testing, portable data acquisition, wind tunnel research, process monitoring	Engine testing, third party transducers, close coupled requirements, high pressure

## PRESSURE

NetScanner Complete Data Acquisition Devices



### MEAS 9032

Measurement Type	Barometer
Media	Dry
Accuracy	±0.01% FS
# of Channels	1
EU Throughput Rate	10 Hz
Enclosure	Laboratory grade
Typical Applications	Barometric monitor, precision reference



### MEAS 9034, 9038

Measurement Type	Calibrator
Media	Dry
Accuracy	±0.01% FS
# of Channels	1
EU Throughput Rate	10 Hz
Enclosure	Laboratory grade
Typical Applications	Calibration, transfer standard, verification testing



### MEAS 98RK-1, 9816

Measurement Type	Pressure
Media	Dry
Accuracy	±0.05% FS
# of Channels	128
EU Throughput Rate	100 Hz
Enclosure	19" rackmount / 4U
Typical Applications	Turbine engine test, control room location



### MEAS Flight Data System

Measurement Type	Pressure
Media	Dry
Accuracy	±0.05%
# of Channels	512
EU Throughput Rate	10 / 100 Base-T
Enclosure	Flight grade
Typical Applications	Flight testing

## PRESSURE SCANNERS

Miniature High Density Pressure Scanners



### MEAS 64HD DTC

Type	Pressure
Media	Dry
Accuracy	±0.03% FS
# of Channels	64
Thermal Comp.	Active (DTC)
Port Sizes (Inches)	0.040
Typical Applications	Wind tunnel research, flight test, on vehicle research



### MEAS 32HD DTC

Type	Pressure
Media	Dry
Accuracy	±0.03% FS
# of Channels	32
Thermal Comp.	Active (DTC)
Port Sizes (Inches)	0.040 or 0.063
Typical Applications	Wind tunnel research, flight test, on vehicle research



### MEAS 64HD, 32HD, 16HD

Type	Pressure
Media	Dry
Accuracy	±0.05% FS
# of Channels	64, 32 or 16
Thermal Comp.	Passive
Port Sizes (Inches)	0.040 or 0.63
Typical Applications	Wind tunnel research, flight test, on vehicle research



### MEAS MicroScanner

Type	Pressure
Media	Dry
Accuracy	±0.05%
# of Channels	16
Thermal Comp.	Active
Port Sizes (Inches)	Direct mount
Typical Applications	For confined space, wind tunnel, flight test

## DATA ACQUISITION SYSTEMS

Multi-Scanner Data Acquisition Systems



### MEAS Optimus

Type	Pressure scanning
Media	Dry
Accuracy	±0.03% FS
# of Channels	2048
EU Throughput Rate	2000 Hz
Enclosure	Laboratory grade
Typical Applications	Aerospace development



### MEAS Initium

Type	Pressure scanning
Media	Dry
Accuracy	±0.05% FS
# of Channels	512
EU Throughput Rate	1200 Hz
Enclosure	Laboratory grade
Typical Applications	Wind engineering



### MEAS Interface

Type	A/D conversion
Media	Dry
Accuracy	±0.05% FS
# of Channels	512
EU Throughput Rate	2000 Hz
Enclosure	Miniature
Typical Applications	In-model placement, Optimus System interface



### MEAS Pneumatics

Type	Quick disconnect
Media	Dry
Accuracy	—
# of Channels	19, 31, 36, 55
EU Throughput Rate	—
Enclosure	Miniature
Typical Applications	Pressure connections for confined spaces

# TEMPERATURE SENSORS

TE Connectivity is a leader in the design and manufacture of NTC thermistors, RTDs, thermocouples, thermopiles, digital output and customized sensor assemblies. Building on our long standing experience, we offer solutions for a wide range of temperature measurement, control and compensation applications. Our broad selection of temperature products meet the specific sensing demands of critical OEM applications, including medical, aerospace, automotive, instrumentation appliances, motor control and HVACR. You can count on us to provide engineering expertise and deliver high quality, cost-effective products and solutions for your application.





## SENSING ELEMENTS—NTC

Analog Output



### MEAS Thermistor Chips

<b>Package</b>	Leadless chips, SMD 0402, 0603, 0805
<b>Type</b>	Gold or silver electrodes, surface mounted
<b>Resistance Range</b>	Chip: 100 to 1MΩ / SMD: 40 to 500KΩ
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Wire bonding compatible</li> <li>• End band SMD</li> </ul>
<b>Accuracy</b>	±1% to 10%
<b>Operating Temp.</b>	-40°C to 125°C
<b>Dimensions (mm)</b>	Chip: 0.6 - 1.0 square SMD 0402: 1 x 0.5 x 0.7 SMD 0603: 1.6 x 0.8 x 1 SMD 0805: 2 x 1.25 x 1.2
<b>Typical Applications</b>	Temperature compensation, communication (DWDWM), infrared sensing systems, PCB mounting temperature measurement



### MEAS Radial Leaded Thermistors

<b>Package</b>	Radial, beads
<b>Type</b>	Epoxy or glass coated
<b>Resistance Range</b>	100 to 1MΩ
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Interchangeable</li> <li>• Moisture resistant</li> <li>• Stability</li> </ul>
<b>Accuracy</b>	0.25% to 20%
<b>Operating Temp.</b>	-55°C to 280°C
<b>Dimensions (mm)</b>	0.4 to 4.9
<b>Typical Applications</b>	Temperature sensing for OEM, automotive, medical, HVACR



### MEAS Axial Leaded Thermistors

<b>Package</b>	DO-35
<b>Type</b>	Glass coated
<b>Resistance Range</b>	5KΩ to 100KΩ
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Tight tolerance (±1%)</li> <li>• Max. stability using high density (HD) chip</li> <li>• Hermetically sealed</li> <li>• Tinned and nickel plated leads</li> </ul>
<b>Accuracy</b>	±1% to ±3%
<b>Operating Temp.</b>	-40°C to 300°C
<b>Dimensions (mm)</b>	2.0 x 4.0 body
<b>Typical Applications</b>	Refrigeration including cabinet sensing and evaporator coil, white goods, fire detection units, air-conditioning systems, PCB temp. sensing



### MEAS Space Qualified (Hi-Rel)

<b>Package</b>	Radial, bead, custom
<b>Type</b>	NTC, epoxy, glass, probes
<b>Resistance Range</b>	1KΩ to 100KΩ
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• ESA and NASA approved</li> <li>• High reliability and accuracy</li> </ul>
<b>Accuracy</b>	0.5% to 10%
<b>Operating Temp.</b>	-55°C to 160°C
<b>Dimensions (mm)</b>	From 2.4
<b>Typical Applications</b>	Instrumentation and compensation for aerospace applications

## SENSING ELEMENTS—DIGITAL

Digital Output



### MEAS Temperature System Sensor (TSYS) Series

<b>Package</b>	QFN16, TDFN8
<b>Type</b>	I <sup>2</sup> C, SPI, PWM, SDM (Convertible to analog voltage)
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Low power</li> <li>• Small size</li> <li>• Calibrated and ready to use</li> <li>• 16-bit resolution</li> </ul>
<b>Accuracy</b>	Up to ±0.1°C at -5°C to 50°C
<b>Operating Temp.</b>	-40°C to 125°C
<b>Dimensions (mm)</b>	QFN16: 4 x 4 x 0.85 TDFN8: 2.5 x 2.5 x 0.75
<b>Typical Applications</b>	Industrial control, replacement of precision RTDs, thermistors and NTCs, heating and cooling systems, HVACR

## SENSING ELEMENTS—RTD

Analog Output



### MEAS Nickel RTD

<b>Package</b>	<ul style="list-style-type: none"> <li>SOT 23</li> <li>Bare die on request</li> </ul>
<b>Type</b>	<ul style="list-style-type: none"> <li>Thin film nickel structure on silicon substrate, protected with a passivation layer</li> <li>SOT 23 package for SMT</li> <li>Bare die for COB assembly</li> </ul>
<b>Resistance Range</b>	1000Ω
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>Harsh environment compatible</li> <li>Automotive qualified</li> <li>Very small dimensions</li> <li>Very short response time</li> <li>Good linearity</li> <li>High temperature coefficient</li> <li>Low power consumption</li> <li>Good thermal connection of sensing element through leadframe-pin</li> </ul>
<b>Accuracy</b>	Class B, according to former DIN 43760 standard
<b>Operating Temp.</b>	-55°C to 160°C
<b>Dimensions (mm)</b>	2.1 x 2.5 x 2.1 (SOT 23), 0.7 x 0.7 x 0.4 (Bare die)
<b>Typical Applications</b>	Automotive, industrial, OEM, thermal compensation, thermal management



### MEAS Platinum Thin Film Chips

<b>Package</b>	Leadless chips, SMD 1206
<b>Type</b>	<ul style="list-style-type: none"> <li>Thin film platinum deposited on ceramic substrate</li> <li>Contact pads on top and bottom side for NTC chip like assembly</li> <li>Contact pads on both ends for SMT</li> </ul>
<b>Resistance Range</b>	100Ω, 1000Ω (Other values on request)
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>Long term stability</li> <li>Interchangeability</li> <li>Assembly like NTC chips</li> <li>Very small dimensions</li> <li>Short response time</li> </ul>
<b>Accuracy</b>	According to DIN EN 60751
<b>Operating Temp.</b>	-50°C to 400 °C
<b>Dimensions (mm)</b>	1.5 x 1.5 (Top / bottom pads), 1.2 x 3.6 (SMT)
<b>Typical Applications</b>	White goods, automotive, industrial, aerospace, medical, test and measurement



### MEAS Platinum Thin Film Sensors

<b>Package</b>	Wired component
<b>Type</b>	<ul style="list-style-type: none"> <li>Thin film platinum deposited on ceramic substrate, glass coated</li> <li>Tube outline available</li> <li>Connection via radial leads</li> </ul>
<b>Resistance Range</b>	100Ω, 1000Ω (Other values on request)
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>Long term stability</li> <li>Interchangeability</li> <li>Small dimensions</li> <li>Short response time</li> <li>High electrical insulation</li> </ul>
<b>Accuracy</b>	Class T (F0.1), A (F0.15), B (F0.3) according to DIN EN 60751
<b>Operating Temp.</b>	-50°C to 600°C (Standard) down to -200°C or up to 1,000°C (On request)
<b>Dimensions (mm)</b>	2.0 x 2.3 x 1.1 (Standard) 1.2 x 4.0 x 1.1 (Standard) Other dimensions (On request)
<b>Typical Applications</b>	White goods, automotive, industrial, aerospace, medical, test and measurement



### MEAS Glass Wire Wound Sensors

<b>Package</b>	GO, GX
<b>Type</b>	Glass rod, radial leads
<b>Resistance Range</b>	100Ω (2X 100Ω on few versions)
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>Aggressive environments (Acid, oil, solvent)</li> <li>Small dimensions</li> <li>Stability</li> <li>No hysteresis</li> <li>Short response time</li> <li>Interchangeability</li> </ul>
<b>Accuracy</b>	Class W0.3, W0.15, W0.1 according to IEC60751
<b>Operating Temp.</b>	-200°C to 400°C
<b>Dimensions (mm)</b>	Ø1.8 / length 5 mm to Ø4.5 / length 48 mm
<b>Typical Applications</b>	Oil and chemical industry, aviation, aeronautic, food industry



### MEAS Ceramic Wire Wound Sensors

<b>Package</b>	CWW600, CWW850, CWW1000
<b>Type</b>	Ceramic rod, radial leads
<b>Resistance Range</b>	100Ω (2X 100Ω on few versions)
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>High temperature</li> <li>Stability</li> <li>No hysteresis</li> <li>Small dimension</li> <li>Interchangeability</li> </ul>
<b>Accuracy</b>	Class W0.3, W0.15, W0.1 according to IEC60751
<b>Operating Temp.</b>	-200°C to 600°C (CWW600) -200°C to 850°C (CWW850) -200°C to 1000°C (CWW1000)
<b>Dimensions (mm)</b>	Ø1.5 / length 8 mm to Ø4.5 / length 30 mm Ø2.7 / length 45 mm (CWW1000)
<b>Typical Applications</b>	Process industry, laboratories, reference sensors

## SENSOR ASSEMBLIES



### MEAS Ring Sensors

<b>Package</b>	<ul style="list-style-type: none"> <li>• Ring for surface assembly</li> <li>• Threaded bolt, tube style</li> </ul>
<b>Type</b>	Epoxy potted element
<b>Sensor Range</b>	<ul style="list-style-type: none"> <li>• NTC</li> <li>• RTD: Pt, Ni</li> </ul>
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Surface mount sensing</li> <li>• For use where space is limited</li> <li>• Simple installation</li> </ul>
<b>Accuracy</b>	<ul style="list-style-type: none"> <li>• NTC: Custom tolerances available</li> <li>• Pt RTD: Class AA, A, B according to IEC60751</li> </ul>
<b>Operating Temp.</b>	Varies: -50°C to 250°C
<b>Dimensions (mm)</b>	Case specific dimensions
<b>Typical Applications</b>	Surface plates, heat exchangers, fluid pumping systems, generators



### MEAS Push-in Sensors

<b>Package</b>	Brass, copper or stainless steel closed-end tube
<b>Type</b>	Epoxy potted element, miniature design
<b>Sensor Range</b>	<ul style="list-style-type: none"> <li>• NTC</li> <li>• RTD: Pt, Ni</li> <li>• Thermocouple: Type J, K, T, E</li> </ul>
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Corrosion resistant</li> <li>• Available with mounting tabs or clips</li> </ul>
<b>Accuracy</b>	<ul style="list-style-type: none"> <li>• NTC: Custom tolerances available</li> <li>• Pt RTD: Class AA, A, B according to IEC60751</li> </ul>
<b>Operating Temp.</b>	Varies: -50°C to 250°C
<b>Dimensions (mm)</b>	Case specific dimensions
<b>Typical Applications</b>	Boiler, liquid, evaporator, HVACR, industrial processes control, district heating and cooling, automotive, bearing monitoring, motors, gear boxes



### MEAS Screw-in Sensors

<b>Package</b>	Brass, copper or stainless steel housing with integrated connector
<b>Type</b>	Epoxy potted element, rigid sheath
<b>Sensor Range</b>	<ul style="list-style-type: none"> <li>• NTC</li> <li>• RTD: Pt, Ni, Cu</li> <li>• Thermocouple: Type J, K, T, E</li> </ul>
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Corrosion resistant</li> <li>• Different thread types</li> <li>• Connectors available</li> </ul>
<b>Accuracy</b>	<ul style="list-style-type: none"> <li>• NTC: Custom tolerances available</li> <li>• Pt RTD: Class AA, A, B according to IEC60751</li> </ul>
<b>Operating Temp.</b>	Varies: -50°C to 250°C
<b>Dimensions (mm)</b>	Custom lengths, diameters and threads available
<b>Typical Applications</b>	Boiler, liquid, HVACR, industrial processes control, district heating and cooling, immersion



### MEAS Refrigeration Molded Probes

<b>Package</b>	PVC or TPE
<b>Type</b>	Overmolded
<b>Sensor Range</b>	<ul style="list-style-type: none"> <li>• NTC</li> <li>• RTD: Pt</li> </ul>
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Mounting clips available</li> </ul>
<b>Accuracy</b>	<ul style="list-style-type: none"> <li>• NTC: Custom tolerances available</li> <li>• Pt RTD: Class AA, A, B according to IEC60751</li> </ul>
<b>Operating Temp.</b>	-40°C to 125°C
<b>Dimensions (mm)</b>	8 x 30, 6.5 x 25, 6 x 50, 6 x 5 x 15
<b>Typical Applications</b>	HVACR, industrial processes control

## SENSOR ASSEMBLIES



### MEAS Pipe Mount Sensors

<b>Package</b>	Copper or stainless steel housing
<b>Type</b>	<ul style="list-style-type: none"> <li>• Overmolded</li> <li>• Epoxy potted</li> </ul>
<b>Sensor Range</b>	<ul style="list-style-type: none"> <li>• NTC</li> </ul>
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Fast response time</li> <li>• Moisture resistant construction</li> </ul>
<b>Accuracy</b>	<ul style="list-style-type: none"> <li>• NTC: custom tolerances available</li> </ul>
<b>Operating Temp.</b>	-40°C to 125°C
<b>Dimensions (mm)</b>	Custom configurations available
<b>Typical Applications</b>	Industrial process, boiler control, HVACR, refrigeration, food service, energy management, test equipment



### MEAS Outdoor Air Sensors

<b>Package</b>	Metal housing with PVC sun shield with or without weatherproof box
<b>Type</b>	<ul style="list-style-type: none"> <li>• Fully potted subassembly</li> </ul>
<b>Sensor Range</b>	<ul style="list-style-type: none"> <li>• NTC</li> </ul>
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Easy installation – threads into mounting hole or standard handy box</li> <li>• Fully potted housing protects sensing element and provides fast, accurate response</li> </ul>
<b>Accuracy</b>	±0.2°C at 0°C to 70°C
<b>Operating Temp.</b>	-40°C to 105°C
<b>Dimensions (mm)</b>	Ø12 X 64
<b>Typical Applications</b>	Residential and commercial building controls, energy management systems



### MEAS Pool and Spa Sensors

<b>Package</b>	Plastic or metal housing with o-ring seal designed for band clamp or backing nut
<b>Type</b>	<ul style="list-style-type: none"> <li>• Overmolded subassembly</li> </ul>
<b>Sensor Range</b>	<ul style="list-style-type: none"> <li>• NTC</li> </ul>
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• O-ring seals</li> <li>• Compatible with pool and spa chemicals</li> </ul>
<b>Accuracy</b>	±0.2°C
<b>Operating Temp.</b>	0°C to 90°C
<b>Dimensions (mm)</b>	6.4 x 50
<b>Typical Applications</b>	Pools, hot tubs



### MEAS Boiler Sensors

<b>Package</b>	Brass housing
<b>Type</b>	<ul style="list-style-type: none"> <li>• Screw</li> </ul>
<b>Sensor Range</b>	<ul style="list-style-type: none"> <li>• NTC</li> <li>• RTD: Pt, Ni, Cu</li> </ul>
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Integrated connector</li> <li>• Corrosion resistant</li> <li>• Different threads types and connectors available</li> </ul>
<b>Accuracy</b>	<ul style="list-style-type: none"> <li>• NTC: Custom tolerances available</li> <li>• Pt RTD: Class AA, A, B according to IEC60751</li> </ul>
<b>Operating Temp.</b>	Varies: -50°C to 250°C
<b>Dimensions (mm)</b>	Custom lengths, diameters and threads available
<b>Typical Applications</b>	Boiler control, liquid, industrial processes control, district heating and cooling, immersion



### MEAS Oven Sensors

<b>Package</b>	Stainless steel housing
<b>Type</b>	<ul style="list-style-type: none"> <li>• Pt element encapsulated into ceramic tube, with rigid stainless steel housing</li> <li>• High temperature cable</li> </ul>
<b>Sensor Range</b>	Pt100, Pt500, Pt1000 sensor
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• High temperature</li> <li>• Easy integration / installation</li> <li>• Higher dielectric strength according to type</li> </ul>
<b>Accuracy</b>	Class B, C according to IEC60751
<b>Operating Temp.</b>	-20°C to 750°C (According to version)
<b>Dimensions (mm)</b>	<ul style="list-style-type: none"> <li>• OD Ø4 mm to Ø6 mm</li> <li>• Immersion length 35 mm to 100 mm</li> <li>• Custom mechanical interface and cable length</li> </ul>
<b>Typical Applications</b>	Drying oven, domestic oven



### MEAS Urea Temperature Sensors

<b>Package</b>	Plastic housing with screw hole mountings
<b>Type</b>	<ul style="list-style-type: none"> <li>• Overmolded plastic housing with integrated 2 pin connector</li> </ul>
<b>Sensor Range</b>	<ul style="list-style-type: none"> <li>• NTC</li> </ul>
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Temperature measurement of urea liquid used in Selective Catalytic Reduction (SCR) systems</li> <li>• Suitable for high pressure applications</li> </ul>
<b>Accuracy</b>	<ul style="list-style-type: none"> <li>• NTC: custom tolerances available</li> <li>• ±2%, 3% and 5%</li> <li>• Beta 25/85: 3976</li> </ul>
<b>Operating Temp.</b>	-40°C to 125°C
<b>Dimensions (mm)</b>	Sensor tip 8 mm diameter
<b>Typical Applications</b>	Temperature measurement of urea liquid used in SCR systems



### MEAS Exhaust Gas Temperature Probes

<b>Package</b>	EGT thermocouple probe
<b>Type</b>	<ul style="list-style-type: none"> <li>• Mineral insulated alloy sheath, screwed mechanical interface, cable extension and automotive connector</li> <li>• Option: CANbus interface (From 1 to 4 thermocouples, fully configurable)</li> </ul>
<b>Sensor Range</b>	<ul style="list-style-type: none"> <li>• Thermocouple: Type K, N</li> </ul>
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• High temperature, robust design</li> <li>• Vibration and corrosion resistant</li> <li>• Fast response time</li> </ul>
<b>Accuracy</b>	Class 1 according to IEC584
<b>Operating Temp.</b>	-40°C to 900°C
<b>Dimensions (mm)</b>	<ul style="list-style-type: none"> <li>• ØOD 4 to ØOD 8</li> <li>• Custom immersion length and cable length</li> </ul>
<b>Typical Applications</b>	Automotive, truck, mining, power unit, racing

## SENSOR ASSEMBLIES



### MEAS Micro-Thermocouples

<b>Package</b>	Fine gage thermocouples
<b>Type</b>	<ul style="list-style-type: none"> <li>• Micro sized thermocouple: 44 AWG, 40 AWG, 38 AWG, 36 AWG</li> <li>• Polymer encapsulated or bare junction</li> </ul>
<b>Sensor Range</b>	Thermocouple type: T, K
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Welded or soldered junction</li> <li>• Low profile, fast response</li> <li>• Polyesterimide wire insulation</li> </ul>
<b>Accuracy</b>	Varies by type: standard, special and custom limits or error available
<b>Operating Temp.</b>	Varies by type: Rated up to 240°C
<b>Dimensions (mm)</b>	Varies by thermocouple gage
<b>Typical Applications</b>	Medical, catheters



### MEAS Patient Monitoring Probes

<b>Sensor with cable and connector</b>	<p>Reusable: Skin; 10FR and 12FR GP                  Disposable: Skin; 9FR and 12FR GP;                  12FR, 18FR, 24FR Esoph/Stethoscope;                  14FR, 16FR, 18FR Foley catheter</p> <p>400 series, 700 series (Reusable only)</p> <ul style="list-style-type: none"> <li>• Autoclavable reusables</li> <li>• Sterile disposables</li> </ul> <p>±0.1°C at 25°C to 45°C                  ISO-80601-2-56: ±0.2°C at 35°C to 42°C</p> <p>-40°C to 100°C, Patient: 0°C to 50°C</p> <p>Reusable: 3 m cable with sensor                  Disposable: Sensor &lt;1 m; 3 m reusable adaptor cable</p> <p>Patient monitoring, laboratory</p>
--	--



### MEAS TLH Reference Probe

<b>Package</b>	TLH100 / TLH600
<b>Type</b>	Rigid protective external stainless steel sheath and stainless steel handle, unique internal design to insure stability
<b>Sensor Range</b>	Pt100 sensor
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Stability</li> <li>• Provided with calibration report or option of calibration certificate by national committee for accreditation (COFRAC)</li> </ul>
<b>Accuracy</b>	Class B (TLH600), A (LTH100) according to IEC60751
<b>Operating Temp.</b>	-80°C to 350°C (TLH100) -180°C to 600°C (TLH600)
<b>Dimensions (mm)</b>	OD Ø5 x 500 + handle Ø15 x 100 (Typical cable length = 2 m)
<b>Typical Applications</b>	Laboratory, temperature sensors calibration by comparison



### MEAS USB Temperature Probe

<b>Push-in probe with handle</b>	<ul style="list-style-type: none"> <li>• Versatile push-in probe with stainless steel sheath and plastic or stainless steel handle</li> <li>• High precision sensing element combined with integrated electronics for signal processing, calibration and USB interface</li> </ul> <p>Not applicable due to direct digital output</p> <ul style="list-style-type: none"> <li>• USB conformal interface</li> <li>• Calibrated digital output, recalibration possible on request</li> <li>• Robust design for general purpose applications</li> <li>• Long term stability</li> </ul> <p>±0.1°C for temperature range -5°C to 55°C                  ±0.2°C for temperature range -40°C to 160°C                  (Other accuracies on request)</p> <p>-55 °C to 160 °C for probe tip                  -40 °C to 85 °C for handle with electronics                  (Other temperature ranges on request)</p> <p>OD Ø6 x 200 + handle Ø19 x 100 (Typical cable length = 2,000)</p> <p>Laboratory, mobile research, test and measurement</p>
----------------------------------	--

## SENSOR ASSEMBLIES



### MEAS Stator Sensors

<b>Package</b>	<ul style="list-style-type: none"> <li>TPE / CPME</li> <li>G11 epoxy glass laminated, Class F or H</li> </ul>
<b>Type</b>	<ul style="list-style-type: none"> <li>Rigid flat, slot sensor</li> <li>Cable or leadwire options</li> </ul>
<b>Sensor Range</b>	<ul style="list-style-type: none"> <li>RTD: Pt, Ni, Cu</li> <li>Thermocouple: Type J, K, T, E</li> </ul>
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>Extended sensitive length</li> <li>Single or dual elements</li> <li>Calibration available</li> </ul>
<b>Accuracy</b>	RTD: Class A, B according to IEC60751
<b>Operating Temp.</b>	Max. temperature: Class F, 155°C Max. temperature: Class H, 180°C Available up to 200°C
<b>Dimensions (mm)</b>	Custom dimensions available
<b>Typical Applications</b>	Monitor temperature between stator coils, electric motors, generators



### MEAS Surface Sensors

<b>Package</b>	<ul style="list-style-type: none"> <li>Silicone rubber or polyimide laminated element</li> <li>SP683</li> </ul>
<b>Type</b>	<ul style="list-style-type: none"> <li>Flat, flexible, rectangular sensor</li> <li>Variety of designs available</li> </ul>
<b>Sensor Range</b>	<ul style="list-style-type: none"> <li>RTD: Pt, Ni, Cu</li> <li>Thermocouple: Type J, K, T, E</li> </ul>
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>Surface sensing for curved or uneven surfaces</li> <li>Noninvasive, simple installation</li> <li>Adhesive backing option</li> </ul>
<b>Accuracy</b>	RTD: Class A, B according to IEC60751
<b>Operating Temp.</b>	Varies: -50°C to 200°C Available up to 220°C
<b>Dimensions (mm)</b>	Custom dimensions available
<b>Typical Applications</b>	Chemical and pharmaceutical industry, process industry, laboratory, aerospace, motor end windings of stator coils, generators



### MEAS Bearing Sensors

<b>Package</b>	<ul style="list-style-type: none"> <li>Copper alloy tip</li> <li>Stainless steel, isolated stainless steel or epoxy glass case</li> </ul>
<b>Type</b>	<ul style="list-style-type: none"> <li>Rigid sheath</li> <li>Tip sensitive</li> <li>Cable / leadwire options</li> </ul>
<b>Sensor Range</b>	<ul style="list-style-type: none"> <li>RTD: Pt, Ni, Cu</li> <li>Thermocouple: Type J, K, T, E</li> </ul>
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>Cut-to-length</li> <li>Copper tip for fast time response</li> <li>Assemblies with fluid seal and spring loading</li> <li>Single or dual elements</li> </ul>
<b>Accuracy</b>	RTD: Class A, B, C according to IEC60751
<b>Operating Temp.</b>	Sheath specific, up to 250°C
<b>Dimensions (mm)</b>	Custom lengths Standard sheath diameters: 4.78, 5.46, 6.35
<b>Typical Applications</b>	Bearing monitoring, electric motors, generators



### MEAS Thermocouple

<b>Package</b>	Screw-in or push-in design with cable extension, connector, or connecting head
<b>Type</b>	<ul style="list-style-type: none"> <li>Collapsible Mineral Insulated (MI) with alloy sheath (Radius <math>\geq 5 \times OD</math>)</li> <li>Flexible cable with plastic or composite insulation</li> <li>Rigid protection sheath: ceramic, quartz or alloy sheath</li> </ul>
<b>Sensor Range</b>	Type T, J, K, N, R, S, B (According to TC type and insulation type)
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>High temperature and high vibration level (For MI)</li> <li>Available in small diameters for fast response time</li> <li>Grounded or ungrounded or apparent hot junction</li> <li>Single or multiple measuring points</li> </ul>
<b>Accuracy</b>	Class 1 according to IEC584
<b>Operating Temp.</b>	-40°C to 1,700°C (According to TC type and insulation type)
<b>Dimensions (mm)</b>	<ul style="list-style-type: none"> <li>OD <math>\varnothing 0.3</math> mm to <math>\varnothing 8</math> mm for MI</li> <li><math>\varnothing 0.15</math> mm for smallest flexible cable</li> <li>Custom dimensions, fittings and cable lengths (From few centimeters to many meters)</li> </ul>
<b>Typical Applications</b>	Aeronautic, process industry, medical, semiconductor industry (Spike, profile)



### MEAS Transmitter

<b>Package</b>	Brass, copper and stainless steel housing, flexible sheath with integrated connector.
<b>Type</b>	<ul style="list-style-type: none"> <li>Epoxy potted element</li> <li>Screw-in</li> </ul>
<b>Sensor Range</b>	4 - 20 mA output
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>Compact, welded design</li> <li>Highly sensitive and stable</li> <li>High vibration application</li> <li>Good waterproof properties</li> </ul>
<b>Accuracy</b>	0.5 or 1% FS
<b>Operating Temp.</b>	-20°C to 120°C
<b>Dimensions (mm)</b>	<ul style="list-style-type: none"> <li>Customer sheath length, thread type</li> <li>Probe diameter: <math>\varnothing 4.75</math> mm; <math>\varnothing 5</math> mm; <math>\varnothing 6</math> mm; <math>\varnothing 6.35</math> mm; <math>\varnothing 8</math> mm</li> </ul>
<b>Typical Applications</b>	Heavy industry, general industrial monitoring

## THERMOPILES



**MEAS TS Series**  
TS318-3B0814, TS318-5C50, TS305-10C50

Package	TO-18, TO-5
Type	Thermopile sensor components
Temp. Range	Depends on applied electronics and calibration, filter types optimal for object temperature range -40°C to 300°C (Extended range: -60°C to 1,000°C)
Unique Features	<ul style="list-style-type: none"> <li>• High signal output</li> <li>• Accurate reference sensors</li> </ul>
Accuracy	Depends on applied electronics and calibration
Operating Temp.	Ambient temperature range: -20°C to 85°C
Dimensions (mm)	Ø9.15 x 4.4 (Body)
Typical Applications	Medical thermometer (Ear, forehead), pyrometer



**MEAS TSD Series**  
Single Pixel Digital Output Series

Package	TO-5
Type	Digital thermopile sensor component
Temp. Range	Object temperature range 0°C to 300°C (Other temperature ranges available upon request)
Unique Features	<ul style="list-style-type: none"> <li>• Calibrated and ready to use, I<sup>2</sup>C interface</li> <li>• Direct assembly to PCB, no additional components needed</li> </ul>
Accuracy	Depends on temperature range, typical 1% full range
Operating Temp.	Ambient temperature range: -20°C to +85°C
Dimensions (mm)	Ø9.15 x 4.4 (Body)
Typical Applications	Contactless temperature measurement, e.g. on moving parts like heated rolls, laminators, people detection, body temperature, microwave oven, air conditioner



**MEAS TSEV**  
Single Pixel Series

Package	OEM-module
Type	Single-pixel thermopile module
Temp. Range	Object temperature range 0°C to 300°C (Other temperature ranges available upon request)
Unique Features	<ul style="list-style-type: none"> <li>• Calibrated, Interfaces: I<sup>2</sup>C, SPI</li> <li>• Different field of views: 5° at 50%, 10° at 50%, 90° at 50%, others on request</li> </ul>
Accuracy	Depends on temperature range, typical 1% full scale, max. accuracy 0.1°C
Operating Temp.	Ambient temperature range: 0°C to 85°C
Dimensions (mm)	35 x 25 x 13 to 31
Typical Applications	Contactless temperature measurement, e.g. on moving parts or heated rolls, laminators, people detection, microwave oven, air conditioner



**MEAS TSEV**  
Multi Pixel Series

Package	OEM-module
Type	8-pixel-linear array thermopile module
Temp. Range	Object temperature range -20°C to 120°C
Unique Features	<ul style="list-style-type: none"> <li>• Calibrated and ready to use</li> <li>• Digital output</li> <li>• Small field of view</li> </ul>
Accuracy	Depends on temperature range, typical 2% full scale
Operating Temp.	Ambient temperature range: -20°C to 85°C
Dimensions (mm)	25 x 35 x 15.2
Typical Applications	Contactless temperature measurement, e.g. on moving parts or heated rolls, laminators, people detection, microwave oven, air conditioner



**MEAS TPT Series**  
TPT300V

Package	IP65 stainless steel tube
Type	Thermopile system for industrial use
Temp. Range	Object temperature range 0°C to 300°C
Unique Features	<ul style="list-style-type: none"> <li>• Calibrated and ready to use</li> <li>• Digital or analog outputs</li> <li>• Small field of view</li> </ul>
Accuracy	Depends on temperature range, typical 1% full scale
Operating Temp.	Ambient temperature range: 0°C to 85°C
Dimensions (mm)	Ø18 x 111
Typical Applications	Contactless temperature measurement, e.g. on moving parts or heated rolls, control of assembly lines, paper fabrication, drying applications

# TORQUE SENSORS

Our torque sensors use advanced strain gage technology to satisfy the most demanding requirements for static and dynamic applications. We offer solutions for measuring reaction torque and rotating torque. Our torque meters complete with integral mechanical stops increase overload capacity and provide additional protection during mounting and operation. We offer a variety of small capacity sensors for dynamic and reaction torque measurements. Our combination sensors simultaneously measure reaction torques and forces with a single device. They can also detect angle position and provide velocity measurement. We can customize a wide range of available models to meet your specific needs.





## TORQUE METERS

Reaction and Rotary



### MEAS CS1060

<b>Package</b>	Square male coupling
<b>Operating Mode</b>	Reaction
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Optional high level output</li> <li>• Static measurements</li> </ul>
<b>Ranges Nm(Lbf-ft)</b>	±5 to ±7K (±4 to ±5.6K)
<b>Max. Over-range</b>	1.5X FS
<b>Output / Span</b>	±20 mV (4 V; ±5 V optional)
<b>Combined Non-linearity &amp; Hysteresis</b>	< ±0.25% FS
<b>Optional Operating Temp.</b>	-20°C to 100°C
<b>Dimensions (mm)</b>	Application dependent
<b>Typical Applications</b>	Non-rotating parts torque measurement, robotics and effectors, laboratory and research



### MEAS CS1120

<b>Package</b>	Keyed shaft connections
<b>Operating Mode</b>	Reaction
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Optional high level output</li> <li>• Excellent temperature stability</li> </ul>
<b>Ranges Nm(Lbf-ft)</b>	±5 to ±2.5K (±4 to ±2K)
<b>Max. Over-range</b>	1.5X FS
<b>Output / Span</b>	±20 mV (4 V; ±5 V optional)
<b>Combined Non-linearity &amp; Hysteresis</b>	< ±0.25% FS
<b>Optional Operating Temp.</b>	-20°C to 100°C
<b>Dimensions (mm)</b>	Application dependent
<b>Typical Applications</b>	Non-rotating parts torque measurement, robotics and effectors, laboratory and research



### MEAS CS1210

<b>Package</b>	Collar mechanical fittings
<b>Operating Mode</b>	Reaction
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• High stiffness</li> <li>• Optional high level output</li> </ul>
<b>Ranges Nm(Lbf-ft)</b>	±160 to ±10K (±128 to ±8K)
<b>Max. Over-range</b>	1.5X FS
<b>Output / Span</b>	±20 mV (4 V; ±5 V optional)
<b>Combined Non-linearity &amp; Hysteresis</b>	< ±0.25% FS
<b>Optional Operating Temp.</b>	-40°C to 150°C
<b>Dimensions (mm)</b>	Application dependent
<b>Typical Applications</b>	Non-rotating parts torque measurement, robotics and effectors, laboratory and research



### MEAS CD1050

<b>Package</b>	Square male couplings
<b>Operating Mode</b>	Dynamic rotary
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Optional high level output</li> <li>• Rugged</li> </ul>
<b>Ranges Nm(Lbf-ft)</b>	±5 to ±7K (±4 to ±5.6K)
<b>Max. Over-range</b>	1.5X FS
<b>Output / Span</b>	±20 mV (4 V; ±5 V optional)
<b>Combined Non-linearity &amp; Hysteresis</b>	< ±0.25% FS
<b>Optional Operating Temp.</b>	-20°C to 80°C
<b>Dimensions (mm)</b>	Application dependent
<b>Typical Applications</b>	Engine efficiency, robotics and effectors, laboratory and research



### MEAS CD1140

<b>Package</b>	Keyed shaft couplings
<b>Operating Mode</b>	Contactless
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• High accuracy</li> <li>• Built-in amplifier</li> <li>• Speed and angle detection</li> </ul>
<b>Ranges Nm(Lbf-ft)</b>	±0.05 to ±20,000 Nm (±0.04 to ±16,000 lbf-ft)
<b>Max. Over-range</b>	2X FS
<b>Output / Span</b>	±10 V (Pulses / Rev. 6.0 / 360)
<b>Non-linearity</b>	±0.1% FS
<b>Hysteresis</b>	±0.1% FS
<b>Optional Operating Temp.</b>	0°C to 60°C
<b>Dimensions (mm)</b>	Application dependent
<b>Typical Applications</b>	Process control equipment, robotics and effectors, test and measurement



### MEAS CD1095

<b>Package</b>	Keyed shaft couplings
<b>Operating Mode</b>	Dynamic rotary
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• High accuracy</li> <li>• Built-in amplifier</li> </ul>
<b>Ranges Nm(Lbf-ft)</b>	±5 to ±2,500 Nm (±4 to 2,000 lbf-ft)
<b>Max. Over-range</b>	1.5X FS
<b>Output / Span</b>	±20 mV (4 V; ±5 V optional)
<b>Non-linearity</b>	<±0.25% FS
<b>Hysteresis</b>	Combined with linearity
<b>Optional Operating Temp.</b>	-20°C to 80°C
<b>Dimensions (mm)</b>	Application dependent
<b>Typical Applications</b>	Process control equipment, robotics and effectors, test and measurement




### MEAS FCA7300

<b>Package</b>	Steering wheel adaptable
<b>Operating Mode</b>	Multi-sensing
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Dual torque / angle range</li> <li>• Steering velocity measurement</li> <li>• Fits all road vehicles</li> </ul>
<b>Ranges N (Lbf)</b>	10 to 200 Nm (7 lbf-ft to 150 lbf-ft)
<b>Max. Over-range</b>	10X FS
<b>Output / Span</b>	±10 V
<b>Non-linearity</b>	±0.1% FS
<b>Hysteresis</b>	±0.1% FS
<b>Optional Operating Temp.</b>	-20°C to 80°C
<b>Dimensions (mm)</b>	Ø195 x 50
<b>Typical Applications</b>	On-car road test, truck and buses steering test, armored vehicles steering test

## AUTOMOTIVE DESIGN AND TEST SENSORS

# ULTRASONIC SENSORS

(air bubble, point level, continuous level monitoring)



TE Connectivity offers a wide range of level sensors using ultrasonic technology. Our ultrasonic sensors measure liquid level despite variations in transparency, viscosity, color or dielectric. These solutions include air bubble detection for medical pumps; point and continuous level sensors for the semi-conductor and high purity markets; and point level sensors for a variety of process control applications. We offer high accuracy, high frequency, short range continuous measurement sensors through air for process control. We also offer standard products that provide a system without moving parts, adjustments, or maintenance. TE works closely with OEMs to offer custom sensors suited for temperature ranges of -30°C to 150°C, pressures to 1,000 psi, various input/output configurations and multiple sensing points.

## STANDARD CONTACT POINT LEVEL



**MEAS LL-01**



**MEAS LL-10**



**MEAS LL-100**



**MEAS LL-101**

	MEAS LL-01	MEAS LL-10	MEAS LL-100	MEAS LL-101
Type	Gap	Tip	Tip	Gap
Unique Features	<ul style="list-style-type: none"> <li>All 316L SS</li> <li>Integral electronics</li> <li>Miniature threads</li> <li>No adjustment for viscosity, density</li> </ul>	<ul style="list-style-type: none"> <li>All 316L SS</li> <li>Integral electronics</li> <li>No adjustment for viscosity, density</li> </ul>	<ul style="list-style-type: none"> <li>All 316L SS</li> <li>Integral electronics</li> <li>No adjustment for viscosity, density</li> <li>Remote electronics available</li> </ul>	<ul style="list-style-type: none"> <li>High / normal fail-safe</li> <li>Integral electronics</li> <li>No adjustment for viscosity, density</li> <li>Demand self-test</li> <li>Remote electronics available</li> </ul>
Input	5 - 30 VDC	5 - 30 VDC	DC and AC options	DC and AC options
Output	<ul style="list-style-type: none"> <li>30 V, 3 W relay</li> <li>Analog 4 - 20 mA power loop</li> </ul>	<ul style="list-style-type: none"> <li>1 A SPDT</li> <li>Analog 4 - 20 mA power loop</li> </ul>	10A DPDT or analog	10A DPDT
Pressure Range	250 psi	1000 psi	1000 psi	1000 psi
Operating Temp.	-30°C to 80°C	-30°C to 80°C	-40°C to 150°C	-40°C to 150°C
Actuation point	0.25 inches	Custom (2.25, 6, 12, 18, 24 inches)	Custom (2.25 to 36 inches)	Custom (1 to 36 inches)
Process Connection	1/4"NPT and 1/2"NPT	3/4"NPT	3/4"NPT	3/4"NPT
Cable	1, 4, 10, 20 feet	1, 4, 10, 20 feet	10 to 40 feet optional	10 to 40 feet optional
Approvals	CE	CE	CE	CE
Typical Applications	Medical waste tanks, histology processors, compressors, chillers, coolant reservoirs	Hydraulic reservoirs, storage tanks, pipe lines, sewage systems	Industrial tanks, pump protection, hydraulic supply lines, storage tanks	Food processing tank, chemical tanks, oil and fuel level, liquid pharmaceuticals

## AIR-BUBBLE AND NON-INVASIVE POINT LEVEL



### MEAS AD-101

Type	Non-invasive
Unique Features	<ul style="list-style-type: none"> <li>Bubble detection from 1 to 10 mm (+) tube</li> <li>Temperature option</li> <li>Occlusion option</li> <li>Fluid differentiation</li> <li>3.3 V and 5 V input option</li> </ul>
Input	6 - 24 VDC standard
Output	Open collector
Pressure Range	Atmosphere
Operating Temp.	0°C to 65°C
Actuation point	—
Process Connection	—
Cable (Inches)	12
Approvals	CE
Typical Applications	Infusion pumps, dialysis machines, apheresis, auto-transfusion



### MEAS SL-630

Type	Non-invasive
Unique Features	<ul style="list-style-type: none"> <li>Stick on dry contact</li> <li>Point level detection</li> </ul>
Input	5 - 24 VDC
Output	TTL (High), dry condition
Pressure Range	Atmosphere
Operating Temp.	-30°C to 70°C
Actuation point	Variable
Process Connection	Reusable sensor, disposable tape
Cable (Inches)	12
Approvals	CE
Typical Applications	Chromatography, chemical analyzer, hemodialysis, reagent vessels



### MEAS SL-900

Type	Contact
Unique Features	<ul style="list-style-type: none"> <li>Miniature</li> <li>10 μRA electropolished finish</li> <li>316 LSS body</li> <li>Designed for high purity market</li> </ul>
Input	Variable
Output	Dual color LED and ½ A relay
Pressure Range	250 PSIG
Operating Temp.	-30°C to 93°C
Actuation point	Variable
Process Connection	1/2", 3/4" VCR, male/female
Cable (Inches)	Up to 24" shielded with strain relief, 9 pin connector
Approvals	NEMA 1 housing
Typical Applications	Pharmaceutical and semiconductor industries, high pressure vessels

## CONTINUOUS LEVEL



### MEAS SL-700

Type	Continuous transmitter through liquid
Unique Features	<ul style="list-style-type: none"> <li>Contact</li> <li>Remotely mounted</li> <li>316 SS sensor</li> <li>Configurable via RS-232</li> </ul>
Input	24 VDC
Output	RS-232, analog, relay setpoints
Pressure Range	250 psi
Operating Temp.	-30°C to 93°C
Sensing Range	1.25" to 15" inches
Process Connection	3/4" VCR, male/female
Accuracy	0.06"
Elect Connection	Terminal block
Approvals	NEMA 1 housing
Typical Applications	Semiconductor tanks, ampoules and bubblers, high purity fluids, level in vacuum



### MEAS ML Series

Type	Continuous transmitter through air
Unique Features	<ul style="list-style-type: none"> <li>Non-contact</li> <li>Remotely mounted</li> <li>316 SS or epoxy sensor material</li> <li>Configurable via RS-232</li> </ul>
Input	24 VDC
Output	RS-232, analog, relay setpoints
Pressure Range	Atmosphere
Operating Temp.	-30°C to 70°C
Sensing Range	0.5" to 5" inches
Process Connection	—
Accuracy	±0.0075"
Elect Connection	Terminal block
Approvals	NEMA 1 housing
Typical Applications	Microplate well level, test tubes and vials, bottle fill level, surface flaw detection

# VIBRATION SENSORS

TE has spent more than 20 years designing and manufacturing accelerometers based on our proprietary Microelectromechanical System (MEMS), bonded gage and piezoelectric ceramic/film technologies. Voltage mode piezoelectric is the most popular accelerometer design due to its high level output and wide bandwidth. We offer voltage mode accelerometers in the traditional 3-wire or 2-wire (IEPE) configurations. Charge mode piezoelectric accelerometers measure shock and vibration in high temperature environments. In addition to its high temperature operating capability when used with a high quality charge amplifier, a charge mode accelerometer offers dynamic range scalability. To measure motion (velocity, displacement) accurately, an accelerometer or with DC response is required. Incorporating MEMS technologies and the latest analog and digital ASICs, our DC accelerometers offer high performance and exceptional value. All products are EAR99 and RoHS compliant.



## MEMS DC ACCELEROMETERS

Embedded



**MEAS 3022, 3028**

<b>Package</b>	Pins or pads
<b>Type</b>	Board level
<b>FS Range (g)</b>	±2, 5, 10, 20, 50, 100, 200
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• mV output</li> <li>• Gas damping</li> <li>• Pin or pad option</li> </ul>
<b>Accuracy</b>	±0.5% non-linearity
<b>Operating Temp.</b>	-40°C to 125°C
<b>Dimensions (mm)</b>	22.86 x 15.24 x 5.33
<b>Typical Applications</b>	Vibration and shock monitoring, tilt applications, motion control, impact testing



**MEAS 3052A, 3058A**

<b>Package</b>	Pins or pads
<b>Type</b>	Board level
<b>FS Range (g)</b>	±2, 5, 10, 20, 50, 100
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Temperature compensated</li> <li>• Gas damping</li> <li>• Pin or pad option</li> </ul>
<b>Accuracy</b>	±0.5% non-linearity
<b>Operating Temp.</b>	-40°C to 125°C
<b>Dimensions (mm)</b>	22.86 x 15.24 x 5.33
<b>Typical Applications</b>	Vibration and shock monitoring, tilt applications, motion control, impact testing



**MEAS 3038**

<b>Package</b>	SMD
<b>Type</b>	Board level
<b>FS Range (g)</b>	±50, 100, 200, 500, 2000, 6000
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Hermetically sealed</li> <li>• High over-range protection</li> <li>• Gas damping</li> </ul>
<b>Accuracy</b>	±0.5% non-linearity
<b>Operating Temp.</b>	-54°C to 125°C
<b>Dimensions (mm)</b>	7.62 x 7.62 x 3.3
<b>Typical Applications</b>	Vibration and shock monitoring, embedded systems, shock testing, safe and arm



**MEAS 3255A**

<b>Package</b>	SMD
<b>Type</b>	Board level
<b>FS Range (g)</b>	±25, 50, 100, 250, 500
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Self test enabled</li> <li>• Gas damping</li> <li>• Bidirectional mounting</li> </ul>
<b>Accuracy</b>	±1.0% non-linearity
<b>Operating Temp.</b>	-40°C to 125°C
<b>Dimensions (mm)</b>	13.46 x 7.62 x 3.81
<b>Typical Applications</b>	Vibration and shock monitoring, aerospace testing, impact testing, transportation

## PIEZOELECTRIC ACCELEROMETERS

Embedded Single Axis



**MEAS 805, 805M1**

<b>Package</b>	TO - 5
<b>Type</b>	Adhesive (Stud mount option)
<b>FS Range (g)</b>	±50, 500 / ±20, 200
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Hermetically sealed</li> <li>• Case grounded design</li> <li>• Bandwidth to 12 kHz</li> </ul>
<b>Accuracy</b>	±1.0% non-linearity
<b>Operating Temp.</b>	-50°C to 100°C
<b>Dimensions (mm)</b>	Ø8.9 x 10.16
<b>Typical Applications</b>	Machine monitoring, data loggers, permanent structures



**MEAS 808, 808M1**

<b>Package</b>	TO - 8
<b>Type</b>	Adhesive (Stud mount option)
<b>FS Range (g)</b>	±10, 50 / ±4, 20
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Hermetically sealed</li> <li>• Case grounded design</li> <li>• Bandwidth to 8 kHz</li> </ul>
<b>Accuracy</b>	±1.0% non-linearity
<b>Operating Temp.</b>	-50°C to 100°C
<b>Dimensions (mm)</b>	Ø15.2 x 16.6
<b>Typical Applications</b>	Machine monitoring, data loggers, embedded applications



**MEAS 810M1**

<b>Package</b>	Board level
<b>Type</b>	SMD
<b>FS Range (g)</b>	±25, 100
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Small size, low cost</li> <li>• Dynamic response</li> <li>• 6 kHz bandwidth</li> </ul>
<b>Accuracy</b>	±2.0% non-linearity
<b>Operating Temp.</b>	-40°C to 125°C
<b>Dimensions (mm)</b>	12.70 x 15.24
<b>Typical Applications</b>	Data logging, impact detection



**MEAS LDTC Family**

<b>Package</b>	Piezo film elements with or without mass and pins
<b>Type</b>	Cantilever beam with vertical or horizontal pins
<b>FS Range (g)</b>	±10 (Typical)
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Very low cost</li> <li>• High sensitivity (1 V/g)</li> <li>• Ultra-low power (Self generating)</li> </ul>
<b>Accuracy</b>	±20.0% (Typical)
<b>Operating Temp.</b>	-40°C to 70°C
<b>Dimensions (mm)</b>	19.05 x 6.35 x 6.35
<b>Typical Applications</b>	Wake-up switch, load imbalance, anti-theft devices, impact sensing, vital signs monitoring

## PIEZOELECTRIC ACCELEROMETERS

Embedded Triaxial



### MEAS 832, 832M1

Package	SMD
Type	Board mount
FS Range (g)	±25, 50, 100, 200, 500
Unique Features	<ul style="list-style-type: none"> <li>• Low cost</li> <li>• Hermetically sealed</li> <li>• Piezo-ceramic</li> </ul>
Accuracy	±2.0% non-linearity
Operating Temp.	-20°C to 80°C (832) -40°C to 125°C (832M1)
Dimensions (mm)	18.8 x 14.22 x 4.32
Typical Applications	Data logging, asset monitoring, impact monitoring



### MEAS 834, 834M1

Package	SMD
Type	Board mount
FS Range (g)	±2000, 6000
Unique Features	<ul style="list-style-type: none"> <li>• Low cost</li> <li>• Hermetically sealed</li> <li>• Piezo-ceramic</li> </ul>
Accuracy	±2.0% non-linearity
Operating Temp.	-20°C to 80°C (834) -40°C to 125°C (834M1)
Dimensions (mm)	18.8 x 14.22 x 4.32
Typical Applications	Data logging, asset monitoring, impact monitoring

## DC ACCELEROMETERS

Plug and Play, Unamplified



### MEAS 40A, 40B

Package	Anodized aluminum
Type	Screw mount
FS Range (g)	±25, 100, 250, 500, 1000, 2000
Unique Features	<ul style="list-style-type: none"> <li>• Critically damped</li> <li>• SAE J211 / 2570 compliant</li> <li>• Compact</li> </ul>
Accuracy	±1.0% non-linearity
Operating Temp.	-20°C to 80°C
Dimensions (mm)	16.7 x 10.0 x 5.0
Typical Applications	In-dummy and pedestrian crash testing



### MEAS 52F

Package	Anodized aluminum
Type	Screw mount
FS Range (g)	±50, 200, 500, 2000
Unique Features	<ul style="list-style-type: none"> <li>• Low cost</li> <li>• Gas damping</li> <li>• Over-range stops</li> </ul>
Accuracy	±1.0% non-linearity
Operating Temp.	-40°C to 90°C
Dimensions (mm)	11.2 x 10.2 x 3.8
Typical Applications	Vibration and shock monitoring, shock testing, safety impact testing, side-impact testing



### MEAS 52, 52M30

Package	Plastic / anodized aluminum
Type	Adhesive mount
FS Range (g)	±50, 200, 500, 2000
Unique Features	<ul style="list-style-type: none"> <li>• Low cost</li> <li>• Gas damping</li> <li>• Over-range stops</li> </ul>
Accuracy	±1.0% non-linearity
Operating Temp.	-40°C to 90°C
Dimensions (mm)	9.65 x 4.83 x 3.3
Typical Applications	Vibration and shock monitoring, shock testing, safety impact testing, side-impact testing

## DC ACCELEROMETERS

Plug and Play, Unamplified



### MEAS 64B, 64C

Package	Anodized aluminum
Type	Screw mount
FS Range (g)	±50, 100, 200, 500, 2000, 6000
Unique Features	<ul style="list-style-type: none"> <li>• SAE J211 / 2570 compliant</li> <li>• Flexible, rugged cable</li> <li>• Over-range stops</li> </ul>
Accuracy	±1.0% non-linearity
Operating Temp.	-40°C to 121°C
Dimensions (mm)	12.19 x 4.83 x 4.83
Typical Applications	In-dummy crash and impact testing



### MEAS 58

Package	Anodized Aluminum
Type	Adhesive mount
FS Range (g)	±50, 100, 200, 500, 2000
Unique Features	<ul style="list-style-type: none"> <li>• Low noise cable</li> <li>• Small package</li> <li>• Light weight</li> </ul>
Accuracy	±1.0% non-linearity
Operating Temp.	-20°C to 85°C
Dimensions (mm)	14.0 x 6.35 x 6.35
Typical Applications	Crash testing, impact testing, off road testing



### MEAS 1201, 1201F

Package	Anodized aluminum
Type	Adhesive / screw mount
FS Range (g)	±50, 100, 200, 500, 1000
Unique Features	<ul style="list-style-type: none"> <li>• Small size</li> <li>• Flexible, rugged cable</li> <li>• Over-range stops</li> </ul>
Accuracy	±1.0% non-linearity
Operating Temp.	-20°C to 85°C
Dimensions (mm)	8.89 x 8.89 x 9.4
Typical Applications	On-vehicle crash and impact testing, vibration and shock monitoring



### MEAS 3801A

Package	Stainless steel
Type	Stud mount
FS Range (g)	±2, 10, 20, 50, 100, 200, 500, 2000
Unique Features	<ul style="list-style-type: none"> <li>• Hermetically sealed sensor</li> <li>• Gas damping</li> <li>• 10,000 g over-range protection</li> </ul>
Accuracy	±0.5% non-linearity
Operating Temp.	-54°C to 121°C
Dimensions (mm)	15.88 x 15.24
Typical Applications	Impact testing, structural testing, test and instrumentation, environmental testing



### MEAS 3700

Package	Stainless steel
Type	Screw mount
FS Range (g)	±50, 200, 500, 2000, 6000
Unique Features	<ul style="list-style-type: none"> <li>• No zero shift</li> <li>• mV output</li> <li>• 20,000 g over-range protection</li> </ul>
Accuracy	±2.0% non-linearity
Operating Temp.	-54°C to 121°C
Dimensions (mm)	14.22 x 8.13 x 3.81
Typical Applications	Impact and shock testing, structural testing, drop testing, aerospace testing



### MEAS EGAXT

Package	Stainless steel
Type	Adhesive / screw mount
FS Range (g)	±5 through 2500
Unique Features	<ul style="list-style-type: none"> <li>• Sub-miniature</li> <li>• Lightweight</li> <li>• 10,000 g over-range protection</li> </ul>
Accuracy	±1.0% non-linearity
Operating Temp.	-40°C to 120°C
Dimensions (mm)	7.2 x 4.6 x 4.6
Typical Applications	Flight test and control, launch, crash, impact testing, robotics



### MEAS EGCS-D0, EGCS-D1S

Package	Stainless steel
Type	Screw / stud mount
FS Range (g)	±5 through 10,000
Unique Features	<ul style="list-style-type: none"> <li>• Rugged housing</li> <li>• Critically damped</li> <li>• 10,000 g over-range protection</li> </ul>
Accuracy	±1.0% non-linearity
Operating Temp.	-40°C to 120°C
Dimensions (mm)	D0: 19.05 x 19.05 x 7.62 D1S: 12.7 x 12.7 x 15.24
Typical Applications	General purpose, machine control, destructive testing, engine testing



### MEAS EGCS-S425

Package	Anodized aluminum
Type	Screw mount
FS Range (g)	±50, 100, 250, 500, 1000, 2000
Unique Features	<ul style="list-style-type: none"> <li>• Critically damped</li> <li>• Compact</li> <li>• Mechanical stops</li> </ul>
Accuracy	±1.0% non-linearity
Operating Temp.	-20°C to 80°C
Dimensions (mm)	14.73 x 9.9 x 4.83
Typical Applications	Auto safety testing for side impact, on-vehicle, sled and in-dummy



### MEAS EGCS-D5

Package	Stainless steel
Type	Screw mount
FS Range (g)	±50, 100, 250, 500, 1000, 2500, 5000, 10000
Unique Features	<ul style="list-style-type: none"> <li>• Rugged design, miniature</li> <li>• Critically damped</li> <li>• In-line amplifier option</li> </ul>
Accuracy	±1.0% non-linearity
Operating Temp.	-40°C to 100°C
Dimensions (mm)	14.2 x 12.7 x 5.6
Typical Applications	Impact and shock testing, drop testing, structural testing

## DC ACCELEROMETERS

Plug and Play, Amplified



### MEAS 4000A, 4001A

Package	Anodized aluminum
Type	Screw mount
FS Range (g)	±2, 5, 10, 20, 50, 100, 200
Unique Features	<ul style="list-style-type: none"> <li>• Integral connector option</li> <li>• Gas damping</li> <li>• Low power</li> </ul>
Accuracy	±1.0% non-linearity
Excitation Voltage	8 - 32 VDC
Operating Temp.	-20°C to 85°C
Dimensions (mm)	18.54 x 18.54 x 8.64
Typical Applications	Low frequency monitoring, transportation, vibration monitoring, motion control



### MEAS 4602, 4604

Package	Anodized aluminum
Type	Screw mount
FS Range (g)	±2, 5, 10, 30, 50, 100, 200,
Unique Features	<ul style="list-style-type: none"> <li>• Exceptional temp. compensation</li> <li>• High over-range</li> <li>• Hermetically sealed</li> </ul>
Accuracy	±1.0% non-linearity
Excitation Voltage	8 - 36 VDC
Operating Temp.	-54°C to 125°C
Dimensions (mm)	21.08 x 21.59 x 7.62
Typical Applications	Flight testing on engines, flutter test, weapons development



### MEAS 4610, 4610A

Package	Anodized aluminum
Type	Screw mount
FS Range (g)	±2, 10, 30, 50, 100, 200, 500
Unique Features	<ul style="list-style-type: none"> <li>• Low noise ranges</li> <li>• Temperature compensation</li> <li>• High over-range</li> <li>• Hermetically sealed</li> </ul>
Accuracy	±1.0% non-linearity
Excitation Voltage	8 - 36 VDC
Operating Temp.	-40°C to 115°C
Dimensions (mm)	21.59 x 25.4 x 7.62
Typical Applications	Rail motion control, modal analysis, flight test, structural test



### MEAS 4801A

Package	Stainless steel
Type	Stud mount
FS Range (g)	±2, 10, 20, 50, 100, 200, 500, 2000
Unique Features	<ul style="list-style-type: none"> <li>• Hermetically sealed sensor</li> <li>• Integral connector</li> <li>• Signal conditioned</li> </ul>
Accuracy	±1.0% non-linearity
Excitation Voltage	8 - 36 VDC
Operating Temp.	-55°C to 125°C
Dimensions (mm)	13.33 x 20.83
Typical Applications	Impact testing, structural testing, test and instrumentation, environmental testing



### MEAS 4807A

Package	Stainless steel
Type	Screw mount
FS Range (g)	±2, 5, 10, 20, 30, 50, 100, 200, 500
Unique Features	<ul style="list-style-type: none"> <li>• Ultra low noise</li> <li>• Micro-g resolution</li> <li>• Hermetically sealed</li> <li>• Detachable cable</li> </ul>
Accuracy	±1.0% non-linearity
Excitation Voltage	8 - 18 VDC
Operating Temp.	-55°C to 125°C
Dimensions (mm)	18.54 x 18.54 x 8.64
Typical Applications	Seismic, structural monitoring, flight testing, trains, machine control, road test



### MEAS 4810A

Package	Stainless steel
Type	Screw mount
FS Range (g)	±2, 5, 10, 20, 30, 50, 100, 200
Unique Features	<ul style="list-style-type: none"> <li>• UltraStable MEMS</li> <li>• Hermetically sealed</li> <li>• Signal conditioned</li> </ul>
Accuracy	±1.0% non-linearity
Excitation Voltage	8 - 36 VDC
Operating Temp.	-55°C to 125°C
Dimensions (mm)	25.4 x 29.1 x 7.6
Typical Applications	Low frequency monitoring, road testing, motion analysis








## DC ACCELEROMETERS

Plug and Play, Triaxial

						
	<b>MEAS EGAXT3</b>	<b>MEAS 53/53A</b>	<b>MEAS 68CM1</b>	<b>MEAS 4630, 4630A</b>	<b>MEAS 4020, 4030</b>	<b>MEAS 606M1</b>
<b>Package</b>	Stainless steel	Anodized aluminum	Stainless steel	Anodized aluminum	Molded plastic	Nitrile rubber pad
<b>Type</b>	Stud mount	Adhesive mount	Screw mount	Screw mount	Screw mount	Removable
<b>FS Range (g)</b>	±5 through 2500	±50, 200, 500, 2000	±500, 1000, 2000	±2, 5, 10, 30, 50, 100, 200, 500	±2, 6	±25
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Sub-miniature</li> <li>• Lightweight</li> <li>• 10,000 g over-range protection</li> </ul>	<ul style="list-style-type: none"> <li>• Low cost</li> <li>• Gas damping</li> <li>• Low power</li> </ul>	<ul style="list-style-type: none"> <li>• World SID</li> <li>• Gas damping</li> <li>• Low power</li> </ul>	<ul style="list-style-type: none"> <li>• Low noise ranges</li> <li>• Temperature compensated</li> <li>• High over-range</li> <li>• Hermetically sealed</li> </ul>	<ul style="list-style-type: none"> <li>• Low cost</li> <li>• Biaxial, with triaxial option</li> <li>• DC response</li> <li>• Rugged construction</li> </ul>	<ul style="list-style-type: none"> <li>• 0.7 damping ratio</li> <li>• Triaxial, hermetic</li> <li>• Seat pad accelerometer</li> <li>• 606M2 IEPE option</li> </ul>
<b>Accuracy</b>	±1.0% non-linearity	±1.0% non-linearity	±1.0% non-linearity	±1.0% non-linearity	±1.0% non-linearity	±1.0% non-linearity
<b>Operating Temp.</b>	-40°C to 120°C	-20°C to 85°C	-20°C to 85°C	-40°C to 115°C	-40°C to 85°C	-20°C to 85°C
<b>Dimensions (mm)</b>	12.7 x 12.7 x 12.7	18.29 x 13.21 x 7.11	12.7 x 12.7 x 12.7	26.16 x 26.16 x 23.37	71.2 x 40.0 x 15.2	199 x 4
<b>Typical Applications</b>	Flight test, crash, shock monitoring	Auto safety, passenger comfort, transportation, NVH analysis	Auto safety, in-dummy crash, on-vehicle crash	Road testing, motion control, structural testing	Structural monitoring, seismic array, bridge testing	Off road equipment, amusement rides, commercial aircraft







## CHARGE MODE, PIEZOELECTRIC ACCELEROMETERS

Plug and Play

						
	<b>MEAS 7500A</b>	<b>MEAS 7501A</b>	<b>MEAS 7502A</b>	<b>MEAS 7504A, 7505A</b>	<b>MEAS 7514A</b>	<b>MEAS 7531A</b>
<b>Package</b>	Stainless steel	Titanium	Titanium	Stainless steel	Stainless steel	Titanium
<b>Type</b>	Center-hole mount	Center-hole mount	Adhesive mounting	Stud mount	Stud mounting	Adhesive mount
<b>Sensitivity (pC/g)</b>	20, 13, 7	5.6	1.8	5.6	100, 50, 30, 20, 13	1.8
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Single axis, shear mode</li> <li>• Hermetically sealed</li> <li>• Isolated mounting surface</li> <li>• Wide bandwidth</li> </ul>	<ul style="list-style-type: none"> <li>• Single axis, shear mode</li> <li>• Hermetically sealed</li> <li>• Bandwidth to &gt;15 kHz</li> </ul>	<ul style="list-style-type: none"> <li>• Single axis, shear mode</li> <li>• Hermetically sealed</li> <li>• &lt;1 g</li> <li>• Wide bandwidth</li> </ul>	<ul style="list-style-type: none"> <li>• Single axis, shear mode</li> <li>• Top and side connector option</li> <li>• &gt;15 kHz Bandwidth</li> </ul>	<ul style="list-style-type: none"> <li>• Single axis, shear mode</li> <li>• &gt;12 kHz bandwidth</li> <li>• High sensitivity</li> </ul>	<ul style="list-style-type: none"> <li>• Triaxial, shear mode</li> <li>• Miniature, light weight</li> <li>• &gt;10 kHz bandwidth</li> </ul>
<b>Operating Temp.</b>	-73°C to 260°C	-73°C to 260°C	-73°C to 260°C	-73°C to 260°C	-73°C to 260°C	-73°C to 260°C
<b>Dimensions (mm)</b>	8.38 x 22.35	5.84 x 14.48	4.40 x 11.94	11.11 x 14.10 (7504A) 11.11 x 19.05 (7505A)	14.99 x 14.99	11.02 x 13.6 x 11.02
<b>Typical Applications</b>	Gearbox vibration monitoring, flight test, high temp. applications	Gearbox vibration monitoring, flight test, high temp. applications	Small structures monitoring, minimal mass loading, high temp. applications	Small structures monitoring, general purpose, high temp. applications	Low frequency vibration, general purpose, high temp. applications	High temp. applications, flight testing, structural monitoring







## VOLTAGE MODE, PIEZOELECTRIC (IEPE) ACCELEROMETERS

Plug and Play

						
	<b>MEAS 7100A, 7101A</b>	<b>MEAS 7102A</b>	<b>MEAS 7108A</b>	<b>MEAS 7104A, 7105A</b>	<b>MEAS 7131A, 7132A</b>	<b>MEAS 7120A, 7122A</b>
<b>Package</b>	Stainless steel / titanium	Titanium	Stainless steel	Stainless steel	Titanium	Titanium
<b>Type</b>	Center-hole mount	Adhesive mount	Adhesive mounting	Stud mounting	Adhesive / stud mounting	Adhesive mounting
<b>Sensitivity (mV/g)</b>	100, 10, 5	100, 50, 20, 10, 5	100, 10	100, 50, 20, 10, 5	500, 100, 50, 10, 5, 2.5	100, 10
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Single axis, shear mode</li> <li>• Isolated mounting surface</li> <li>• Hermetically sealed</li> <li>• Wide bandwidth, &gt;10 kHz</li> </ul>	<ul style="list-style-type: none"> <li>• Single axis, shear mode</li> <li>• Wide bandwidth</li> <li>• &lt;1 g weight</li> </ul>	<ul style="list-style-type: none"> <li>• Single axis, shear mode</li> <li>• Wide bandwidth</li> <li>• Welded construction</li> <li>• Small size</li> </ul>	<ul style="list-style-type: none"> <li>• Single axis, shear mode</li> <li>• Wide bandwidth</li> <li>• Top and side connector option</li> </ul>	<ul style="list-style-type: none"> <li>• Triaxial, shear mode</li> <li>• &gt;12 kHz bandwidth</li> <li>• 4-pin connector</li> <li>• Hermetically sealed</li> </ul>	<ul style="list-style-type: none"> <li>• Single axis, shear mode</li> <li>• Miniature cube</li> <li>• 10 - 32 connector</li> <li>• Hermetically sealed</li> </ul>
<b>Operating Temp.</b>	7100A: -55°C to 150°C 7101A: -55°C to 125°C	-55°C to +125°C	-55°C to 125°C	-55°C to 125°C	-55°C to 125°C	-55°C to 125°C
<b>Dimensions (mm)</b>	7100A: 9.9 x 22.35 7101A: 5.84 x 14.48	4.40 x 11.94	9.53 x 10.16	7104A: 11.11 x 14.10 7105A: 11.11 x 19.05	7131A: 11 x 11 x 11 7132A: 15.24 x 20.32 x 13.46	10.16 x 10.16 x 19.16
<b>Typical Applications</b>	Flight testing, general purpose, vibration monitoring	Small structures monitoring, minimal mass loading, general purpose testing	Vibration monitoring, modal testing, general purpose	General purpose IEPE accel, vibration monitoring, lab testing	General purpose, modal testing, vibration monitoring	Modal testing, vibration monitoring, small structures monitoring

## VOLTAGE MODE, PIEZOELECTRIC ACCELEROMETERS

Plug and Play

						
	<b>MEAS 8042</b>	<b>MEAS 8011, 8021-01</b>	<b>MEAS 8032-01</b>	<b>MEAS 8711-01</b>	<b>MEAS 8011, 8021-AR/AP</b>	<b>MEAS 8011, 8021-VR/VP</b>
<b>Package</b>	Titanium	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
<b>Type</b>	Stud mount	Stud / center-hole mount	Stud mount	Stud mount	Stud / center-hole mount	Stud / center-hole mount
<b>Sensitivity (mV/g)</b>	500, 100, 10	500, 100, 10	100, 10	1000, 500, 250, 100	4 - 20 mA RMS or peak	4 - 20 mA RMS or peak
<b>Unique Features</b>	<ul style="list-style-type: none"> <li>• Industrial applications</li> <li>• Submersible</li> <li>• IP68, &gt;100 meters</li> <li>• 16 kHz bandwidth</li> </ul>	<ul style="list-style-type: none"> <li>• Industrial accelerometer</li> <li>• Case isolated, internal shielding</li> <li>• Reverse wiring protection</li> <li>• ±1.0% non-linearity</li> </ul>	<ul style="list-style-type: none"> <li>• Industrial accelerometer</li> <li>• Case isolated, internal shielding</li> <li>• Low cost</li> <li>• Molded strain relief</li> </ul>	<ul style="list-style-type: none"> <li>• Industrial accelerometer</li> <li>• Case isolated, internal shielding</li> <li>• Low cost</li> </ul>	<ul style="list-style-type: none"> <li>• Industrial accelerometer</li> <li>• Case isolated, internal shielding</li> <li>• 50, 20, 10, 5 g ranges</li> </ul>	<ul style="list-style-type: none"> <li>• Velocity transmitter</li> <li>• Case isolated, internal shielding</li> <li>• 0.5 to 5.0 in/sec</li> </ul>
<b>Operating Temp.</b>	-20°C to 80°C	-55°C to 125°C	-55°C to 100°C	-55°C to +125°C	-40°C to 85°C	-40°C to 85°C
<b>Dimensions (mm)</b>	22.23 x 48.26	22.23 x 48.26	14.3 x 45.3	22.23 x 50.80	22.23 x 48.26	22.23 x 48.26
<b>Typical Applications</b>	Submersed pump monitoring, underwater research, gearbox monitoring	Industrial applications, machine monitoring, intrinsic safety	Industrial applications, machine monitoring	Industrial applications, machine monitoring, wind turbines	Industrial applications, machine monitoring, intrinsic safety	Industrial applications, machine monitoring, intrinsic safety

## ELECTRONICS

### Signal Conditioners



**MEAS 121**

**Type** Bench top  
**# of Channels** 3  
**Gain Range** 0.001 to 9999  
**Unique Features**

- Universal DC amplifier
- Low noise operation with auto-zero
- For bridge type sensors
- $\mu$ P controlled, programmable
- Low pass filter options

**Dimensions (mm)** 301 x 258 x 102  
**Typical Applications** Instrumentation labs, test benches, R&D facilities



**MEAS 130**

**Type** In-line charge converter  
**# of Channels** 1  
**Gain Range** 0.1, 1, 10  
**Unique Features**

- Low noise
- Small package
- Wide bandwidth
- BNC male or female

**Dimensions (mm)**  $\varnothing$ 13.8 x 52.2  
**Typical Applications** Instrumentation labs, high temperature testing PE accelerometer



**MEAS 140/142**

**Type** Auto-zero inline amplifier  
**# of Channels** 1  
**Gain Range** 10, 25, 50, 100, 200, 500  
**Unique Features**

- $\pm 1.5$  mV auto-zero
- For bridge type sensor (140)
- For strain gage (142)
- Lowest noise
- 5 to 30 VDC excitation

**Dimensions (mm)** 56.9 x 25.4 x 12.7  
**Typical Applications** Instrumentation labs, test benches, R&D facilities



**MEAS 160**

**Type** Bench top  
**# of Channels** 1  
**Gain Range** 1, 10  
**Unique Features**

- Economical IEPE power supply
- Portable, compact
- Rechargeable battery

**Dimensions (mm)** 3.95 x 2.83 x 1.58  
**Typical Applications** Instrumentation



**MEAS 161**

**Type** Bench top  
**# of Channels** 4  
**Gain Range** 0.001 to 999.9  
**Unique Features**

- Charge and IEPE conditioner
- Sensitivity normalization
- LCD display
- Support IEEE 1451.4 TEDS
- 10 V peak linear output
- Selectable LP filter

**Dimensions (mm)** 310 x 180 x 115  
**Typical Applications** Instrumentation labs, PE / IEPE sensors

# WATER LEVEL SENSORS

We are a leader in the water resources monitoring market with long standing experience in the design and manufacture of water level and water quality sensors. Our expertise in media isolated pressure sensors offers unique advantages in creative product development and consistent product performance. Water level transducers can be customized and are available in a wide range of accuracies, materials, and cabling. With your choice of analog or digital output, our sensors are easily adapted to any data system. Or, use self-powered units with onboard memory for long term deployment. We also provide water quality instrumentation for analyzing lakes, rivers, estuaries, and aquifers worldwide. Our CTD models measure conductivity, temperature, and depth critical to water resources improvement and preservation.



## WATER LEVEL DATA LOGGERS



**MEAS TruBlue Logger 555 Level, 575 Baro, 585 CTD**

Accuracy	±0.05% FS TEB (TruBlue 555, 575, 585) 1% of reading or 20 µs/cm (TruBlue 585)
Range	0 - 692 ft (TruBlue 555, 585) 8 - 16 psia (TruBlue 575) 5 - 200,000 µs/cm (TruBlue 585)
Max. Over-range	2X FS (TruBlue 555, 585) 32 psia (TruBlue 575)
Output	RS-485, SDI - 12
Data Logging Memory	8 MB
Operating Temp.	0°C to 50°C
Dimensions (mm)	Ø19.0 x 390.0
Typical Applications	Groundwater monitoring, surface water monitoring, oceanographic research, barometric pressure monitoring



**MEAS TruBlue Logger 255 Level**

Accuracy	0.05% FS TEB
Range	0 - 658 ft H <sub>2</sub> O
Max. Over-range	3X full scale
Output	RS 485, SDI - 12
Data Logging Memory	8 MB or 56 MB
Operating Temp.	0°C to 50°C
Dimensions (mm)	Ø19.0 x 222.0
Typical Applications	Flood and storm monitoring, wave studies and rapid sampling, stream and stage gaging, slug and pump test, aquifer characterization



**MEAS TruBlue Logger 275 Baro**

Accuracy	0.05% FS TEB
Range	8 - 16 psia
Max. Over-range	3X full scale
Output	RS 485, SDI-12
Data Logging Memory	8 MB or 56 MB
Operating Temp.	0°C to 50°C
Dimensions (mm)	Ø19.0 x 222.0
Typical Applications	Barometric pressure monitoring

## DIGITAL LEVEL SENSORS



**MEAS KPSI 500, 501**

Accuracy	±0.05% FS TEB (KPSI 500) ±0.01 ft H <sub>2</sub> O (KPSI 501)
Range	10 - 230 ft (KPSI 500) 10 - 50 ft (KPSI 501)
Max. Over-range	2X FS
Output	SDI - 12, RS-485
Operating Temp.	-20°C to 60°C
Dimensions (mm)	Ø25.4 x 197.0
Typical Applications	Groundwater monitoring, surface water monitoring, oceanographic research



**MEAS KPSI 351, 353, 355**

Accuracy	±0.10% FS TEB (KPSI 353) ±0.05% FS TEB (KPSI 355) ±0.01 ft H <sub>2</sub> O (KPSI 351)
Range	10 - 230 ft (KPSI 353, 355) 10 - 50 ft (KPSI 351)
Max. Over-range	2X FS
Output	SDI - 12, RS-485
Operating Temp.	-20°C to 60°C
Dimensions (mm)	Ø19.0 x 243.0
Typical Applications	Groundwater monitoring, surface water monitoring, oceanographic research

## DIGITAL TEMPERATURE SENSORS



**MEAS KPSI 380**

Accuracy	±0.1°C
Range	-20°C to 60°C
Connection	Open port nosepiece
Output	SDI - 12, RS-485
Operating Temp.	-20°C to 60°C
Dimensions (mm)	Ø19.0 x 127.0
Typical Applications	Groundwater monitoring, surface water monitoring, storm water, dam operations and stream gaging

## ANALOG LEVEL SENSORS

1" Bore



### MEAS KPSI 700, 710, 720

Accuracy	±1.00%, ±0.50%, ±0.25% FSO
Range	Custom ranges from: 2.3 - 700 ft H <sub>2</sub> O (Vented) 10 - 700 ft H <sub>2</sub> O (Sealed) 35 - 700 ft H <sub>2</sub> O (Absolute)
Max. Over-range	2X FS
Output	4 - 20 mA, 0 - 5 VDC, 0 - 2.5 VDC, 0 - 4 VDC, 0 - 10 VDC, 1.5 - 7.5 VDC
Operating Temp.	-20°C to 60°C
Dimensions (mm)	Ø25.4 x 86.6
Typical Applications	Groundwater monitoring, surface water monitoring, oceanographic research, pump control, life stations, landfill leachate
Agency Approvals	CE, WEEE, RoHS, UL and FM (Intrinsically safe)



### MEAS KPSI 730, 735

Accuracy	±0.10%, ±0.05% FSO
Range	Custom ranges from: 5 - 700 ft H <sub>2</sub> O (Vented: KPSI 730) 0 - 5 ft H <sub>2</sub> O to 0 - 700 ft H <sub>2</sub> O (Sealed, Absolute: KPSI 730) 6 - 700 ft H <sub>2</sub> O (Vented KPSI 735)
Max. Over-range	2X FS
Output	4 - 20 mA, 0 - 5 VDC, 0 - 2.5 VDC, 0 - 4 VDC, 0 - 10 VDC, 1.5 - 7.5 VDC
Operating Temp.	-20°C to 60°C
Dimensions (mm)	Ø25.4 x 86.6
Typical Applications	Groundwater monitoring, surface water monitoring, oceanographic research, pump control, life stations, landfill leachate
Agency Approvals	CE, WEEE, RoHS, UL and FM (Intrinsically safe)

0.75" Bore



### MEAS KPSI 320, 330, 335, 342

Accuracy	±0.10%, ±0.05% FSO (KPSI 330, 335) ±0.25% FSO (KPSI 320) ±0.25% FS TEB (KPSI 342)
Range	Custom ranges from: 5 - 700 ft H <sub>2</sub> O (Vented: KPSI 320, 330, 335) 10 - 700 ft H <sub>2</sub> O (Vented KPSI 342) 0 - 5 ft H <sub>2</sub> O to 0-700 ft H <sub>2</sub> O (Sealed: KPSI 330, 342) 10 - 700 ft H <sub>2</sub> O (Sealed: KPSI 320) 35 - 700 ft H <sub>2</sub> O (Absolute: KPSI 320, 330, 342)
Max. Over-range	2X FS
Output	4 - 20 mA, 0 - 5 VDC, 0 - 2.5 VDC, 0 - 4 VDC, 0 - 10 VDC, 1.5 - 7.5 VDC (KPSI 320, 330, 335) 4 - 20 mA (KPSI 342)
Operating Temp.	-20°C to 60°C (KPSI 320, 330, 335) -20°C to 85°C (KPSI 342)
Dimensions (mm)	Ø19.0 x 151.0
Typical Applications	Groundwater monitoring, surface water monitoring, oceanographic research, pump control, lift stations, landfill leachate, tailrace and forebay monitoring
Agency Approvals	CE, WEEE, RoHS, UL and FM (Intrinsically safe) (KPSI 320, 330, 335) CE, WEEE, RoHS (KPSI 342)



### MEAS KPSI 300DS

Accuracy	±0.50% FSO
Range	Custom ranges from: 700 - 6,921 ft H <sub>2</sub> O
Max. Over-range	2X FS
Output	4 - 20 mA, 0 - 5 VDC, 0 - 2.5 VDC, 0 - 4 VDC, 0 - 10 VDC, 1.5 - 7.5 VDC
Operating Temp.	-20°C to 60°C
Dimensions (mm)	Ø19.0 x 215.0
Typical Applications	Down hole, level control, pump control
Agency Approvals	CE, WEEE, RoHS

## LEVEL SENSORS

### OEM Level Sensors



#### MEAS KPSI 705

Accuracy	±0.25% FSO
Options	Optional ETFE
Range	Custom ranges from 6 - 115 ft H <sub>2</sub> O
Max. Over-range	2X FS
Output	4 - 20 mA, 0 - 5 VDC, 0 - 2.5 VDC, 0 - 4 VDC, 0 - 10 VDC, 1.5 - 7.5 VDC
Operating Temp.	-20°C to 60°C
Dimensions (mm)	Ø25.4 x 86.6
Typical Applications	Wastewater, lift stations, pump control, slurry tank liquid level, tank level
Agency Approvals	CE, WEEE, RoHS, UL and FM (Intrinsically safe)



#### MEAS KPSI 745, 750

Accuracy	±0.25% FSO
Options	Optional standoff (KPSI 745)
Range	Custom ranges from 10 - 115 H <sub>2</sub> O
Max. Over-range	2X FS
Output	4 - 20 mA, 0 - 5 VDC, 0 - 2.5 VDC, 0 - 4 VDC, 0 - 10 VDC, 1.5 - 7.5 VDC
Operating Temp.	-20°C to 60°C
Dimensions (mm)	KPSI 745: Ø88.9 x 279.4 (With standoff) Ø88.9 x 253.3 (Without standoff) KPSI 750: Ø104.1 x 279.4
Typical Applications	Wastewater, lift stations, pump control, slurry tank liquid level, tank level
Agency Approvals	CE, WEEE, RoHS, UL and FM (Intrinsically safe)



#### MEAS LTA, LT Series

Accuracy	±0.25% FSO
Options	Optional lightning protection
Range	0 - 1 psi up to 0 - 300 psi Custom ranges available
Max. Over-range	2X FS
Output	4 - 20 mA
Operating Temp.	-20°C to 60°C
Dimensions (mm)	LTA: Ø25.4 x 93.0 LT: Ø25.4 x 170.5 (Dependent on fitting)
Typical Applications	Pump control, tank liquid level, landfill leachate monitoring, construction bypass pumping, dewatering, lift station monitoring, submersible tank liquid level, liquid line pressure, slurry tank liquid level, wastewater
Agency Approvals	CE, WEEE, RoHS, with optional UL, CUL, and FM (Intrinsically safe)

### OEM Level Sensors



#### MEAS LTB, LTR Series

Accuracy	±0.25% FSO
Options	Optional lightning protection
Range	0 - 11.5, 23.1, 34.6, 69.2, 115.4 ft H <sub>2</sub> O Custom ranges available
Max. Over-range	2X FS
Output	4 - 20 mA, 0 - 5 VDC, 0 - 10 VDC, 0 - 2.5 VDC, 0 - 4 VDC, 1.5 - 7.5 VDC
Operating Temp.	-20°C to 60°C
Dimensions (mm)	LTB: Ø104.1 x 206.5 LTR: 287.1 with overmold conduit connection, 253.5 with gland seal conduit connection
Typical Applications	Pump control, tank liquid level, landfill leachate monitoring, construction bypass pumping, dewatering, lift station monitoring, submersible tank liquid level, liquid line pressure, slurry tank liquid level, wastewater
Agency Approvals	CE, WEEE, RoHS, with optional UL, CUL, and FM (Intrinsically safe)

## NON-SUBMERSIBLE PRESSURE TRANSDUCERS



#### KPSI 27, 28

Accuracy	±0.5%, ±0.25%
Options	IP68 submersible option
Range	1 - 300 psi (Vented) 5 - 2000 psi (Sealed) 15 - 2000 psi (Absolute)
Max. Over-range	2X FS
Output	4-20 mA, 0-5 VDC, 0-2.5 VDC 0-4 VDC, 0-10 VDC, 1.5-7.5 VDC
Operating Temp.	-20°C to 60°C
Dimensions (mm)	Ø25.4 x 86.6
Typical Applications	Line pressure monitoring, pump and lift stations, pump control, tank level monitoring, underwater research
Agency Approvals	CE, WEEE, RoHS, UL and FM (Intrinsically safe)



#### KPSI 30

Accuracy	±0.1%
Options	IP68 submersible option
Range	2 - 300 psi (Vented) 5 - 500 psi (Sealed, absolute)
Max. Over-range	2X FS
Output	4-20 mA, 0-5 VDC, 0-2.5 VDC 0-4 VDC, 0-10 VDC, 1.5-7.5 VDC
Operating Temp.	-20°C to 60°C
Dimensions (mm)	Ø25.4 x 86.6
Typical Applications	Line pressure monitoring, pump and lift stations, pump control, tank level monitoring, underwater research
Agency Approvals	CE, WEEE, RoHS, UL and FM (Intrinsically safe)

## EVERY CONNECTION COUNTS

TE Connectivity is a global technology leader. Our connectivity and sensor solutions are essential in today's increasingly connected world. If data, signal or power moves through it, TE connects and senses it.



TE designs, manufactures and delivers products, systems and solutions in over 150 countries. This global reach enables us to work closely with our customers and identify and act on local needs quickly. By leveraging our global scale, we can deliver the highest levels of quality, innovation and service at a local level.



# CHOOSE A PARTNER THAT'S AS GLOBAL AS YOU ARE

Connect with us today at [te.com/sensors](http://te.com/sensors)



## Calibration

Testing of a sensor to confirm output is within a specified range for particular values of the input.

## Compensated Temperature Range

The temperature range in which the sensor meets the specifications for Thermal Zero Shift and Thermal Sensitivity Shift.

## DeviceNet™

Device level network for industrial automation.

## Excitation

The recommended voltage with which a standard sensor should be excited.

## Full Scale Output (FSO)

Full Scale Output (FSO) is the span between the lowest range limit and the highest range limit of the sensor. Published values are approximate values and may vary with each sensor.

## Hysteresis

Hysteresis is the difference in sensor output signal at a specific input when applied in the increasing and then decreasing sectors of a single cycle of short time duration at constant temperature. It is expressed as a percentage of FSO.

## Natural Frequency

Natural Frequency is the frequency at which the sensor's active sensing element goes into resonance and responds with maximum movement for a specific applied input.

## Non-linearity

Non-linearity is the deviation of the sensor output signal from a theoretical straight line which has been fitted to the data points of an actual calibration. It expresses the maximum deviation of all data points in that calibration and is sometime expressed as a percentage of FSO, usually as a  $\pm\%$  error band, or % of reading.

## Non-Repeatability

Non-repeatability is the deviation in sensor output signal levels when a specific input is applied in consecutive cycles of short time duration under the same conditions, such as temperature and direction of increasing or decreasing input. It can be determined by performing two consecutive short time duration calibration cycles and can be expressed as  $\pm\%$ FSO.

## Operating Temperature

The temperature range within which a sensor will meet all of its stated specifications while powered and in operation.

## Over-range Limit

The over-range limit is the maximum input to which the sensor can be exposed without damage.

## Plug and Play

Sensors designed for end-users who expect sensors to meet calibration performance standards once power and signal cables are properly connected to instrumentation.

## Root Mean Square

The square root of the arithmetical mean of a set of squared instantaneous values

## Sealing

Sealing is the assembly method by which the sensor is protected from moisture in the surrounding environment. The most desirable sealing method is hermetically seal. This can be achieved by joining the individual piece parts together by soldering, welding, brazing, glassing, or other commonly accepted manufacturing processes. Another common sealing method is epoxy seal. It is achieved by joining the piece parts by applying adhesive or potting compound to mitigate the incursion of moisture into the sensor assembly.

## Sensitivity

The sensor's change in output per the unit change in the physical parameter being measured. The change may be linear or non-linear.

## Thermal Sensitivity Shift (TSS)

The change in sensitivity of the sensor as a function of temperature. It is usually expressed as a percent reading change in sensitivity for a specified change in temperature such as  $\pm 0.01\%/^{\circ}\text{C}$  and is generally linear with moderate temperature changes. The Thermal Sensitivity Shift can be eliminated or minimized by using sensitivity numbers determined at or near the temperature of use.

## Thermal Zero Shift (TZS)

The change in the Zero Offset as a function of temperature is the Thermal Zero Shift. It may be expressed as either a %FSO for a specific temperature change such as  $\pm 0.01\%\text{FSO}/^{\circ}\text{C}$  or in voltage units such as  $\pm 0.2\text{ mV}/^{\circ}\text{C}$  and it is not a linear function.

## Total Error Band (TEB)

Typically expressed as a percentage, the TEB is the combination of possible errors for a sensing device within its measurement range and temperature of operation.

<b>ABS</b>	American Bureau of Shipping	<b>IP</b>	Ingress Protection	<b>PSIS</b>	Pounds Per Square Inch-Sealed Gage Reference
<b>AC</b>	Alternating Current	<b>ISO</b>	International Organization for Standardization	<b>PTFE</b>	Polytetrafluoroethylene
<b>ANSI</b>	American National Standards Institute	<b>ITAR</b>	International Traffic in Arms Regulations	<b>PUDF</b>	Public Use Data File
<b>ASIC</b>	Application-Specific Integrated Circuit	<b>KHZ</b>	Kilohertz	<b>PWM</b>	Pulse Width Modulation
<b>ATEX</b>	Appareils destinés à être utilisés en ATMosphères EXplosibles	<b>LED</b>	Light Emitting Diode	<b>R&amp;D</b>	Research and Development
<b>BOP</b>	Blow Out Prevention	<b>LIN</b>	Local Interconnect Network	<b>RDT&amp;E</b>	Research, Development, Test & Evaluation
<b>CAN</b>	Controller Area Network	<b>LVD</b>	Low Voltage Differential	<b>RFI</b>	Radio Frequency Interference
<b>CE</b>	Communauté Européenne	<b>LVDT</b>	Linear Variable Displacement Transducers	<b>RH</b>	Relative Humidity
<b>CENELEC</b>	European Committee for Electrotechnical Standardization	<b>mA</b>	Milliamp	<b>RMS</b>	Root Mean Square
<b>CSA</b>	Canadian Standards Association	<b>MAF</b>	Mass Air Flow	<b>RoHS</b>	Restriction of Hazardous Substances
<b>CT</b>	Computed Tomography	<b>mbar</b>	Millibar	<b>RPM</b>	Revolutions Per Minute
<b>cUL</b>	Tested to Canadian Standards by Underwriters' Laboratories	<b>MCR</b>	Main Control Room	<b>RTD</b>	Resistance Temperature Detector
<b>DC</b>	Direct Current	<b>MEMS</b>	Microelectromechanical Systems	<b>RTU</b>	Remote Terminal Unit
<b>DCS</b>	Distributed Control System	<b>mHZ</b>	Megahertz	<b>RVDT</b>	Rotary Variable Differential Transformer
<b>DEF</b>	Diesel Exhaust Fluid	<b>mm</b>	Millimeter	<b>SAE</b>	Society of Automotive Engineering
<b>DTC</b>	Digital Temperature Compensation	<b>MQS</b>	Military Qualification Standards	<b>SCADA</b>	Supervisory Control and Data Acquisition
<b>ECU</b>	Engine Control Unit	<b>MR</b>	Magnetostrictive	<b>SCR</b>	Selective Catalytic Reduction
<b>EGR</b>	Exhaust Gas Recirculation	<b>mV</b>	Millivolt	<b>SDI-12</b>	Serial Data Interface at 1200 Baud
<b>EMC</b>	Electromagnetic Compatibility	<b>NAV</b>	Navigation	<b>SMD</b>	Surface Mount Device
<b>EMI</b>	Electromagnetic Interference	<b>NASA</b>	National Aeronautics and Space Administration	<b>SpO<sub>2</sub></b>	Pulse Oximeter Oxygen Saturation
<b>ESA</b>	European Space Agency	<b>NEMA</b>	National Electrical Manufacturers Association	<b>SPDT</b>	Single Pole, Double Throw
<b>FLS</b>	Field Loadable Software	<b>NIST</b>	National Institute of Standards and Technology	<b>SPI</b>	Serial Peripheral Interface
<b>FM</b>	Factory Mutual	<b>NOx</b>	Nitrogen Oxide	<b>SPST</b>	Single Pole, Single Throw
<b>FPGA</b>	Field Programmable Gate Array	<b>NPT</b>	National Pipe Tapered	<b>T&amp;M</b>	Test & Measurement
<b>FS</b>	Full Scale	<b>NSF</b>	National Science Foundation	<b>TDFN</b>	Thin Dual Flats No Leads
<b>FSO</b>	Full Scale Output	<b>NTC</b>	Negative Temperature Coefficient	<b>TE</b>	TE Connectivity
<b>FT LBS</b>	Foot Pounds	<b>OEM</b>	Original Equipment Manufacturer	<b>TEB</b>	Total Error Band
<b>GPS</b>	Global Positioning System	<b>PCB</b>	Printed Circuit Board	<b>TESS</b>	TE Sensor Solutions
<b>HUMS</b>	Health Usage and Monitoring System	<b>PDF</b>	Portable Document Format	<b>THSA</b>	Trimmable Horizontal Stabilizer Actuators
<b>HVACR</b>	Heating, Ventilation, Air Conditioning, and Refrigeration	<b>PDM</b>	Pulse Density Modulation	<b>TPMS</b>	Tire Pressure Monitoring System
<b>HVD</b>	High-Voltage Differential	<b>PE</b>	Piezoelectric	<b>TSYS</b>	Temperature System Sensor
<b>HZ</b>	Hertz	<b>PLCD</b>	Permanent Magnet Linear Displacement Sensor	<b>UAV</b>	Unmanned Aerial Vehicle
<b>I<sup>2</sup>C</b>	Inter-Integrated Circuit	<b>PPS</b>	Polyphenylene Sulfide	<b>uC</b>	Microcontroller
<b>IEC</b>	International Electrical Commission	<b>PSI</b>	Pounds Per Square Inch	<b>UL</b>	Underwriters Laboratories
<b>IECEX</b>	International Electrotechnical Commission Explosive	<b>PSIA</b>	Pounds Per Square Inch-Absolute Reference	<b>USB</b>	Universal Serial Bus
<b>IEEE</b>	Institute of Electrical and Electronics Engineers	<b>PSID</b>	Pounds Per Square Inch-Differential Reference	<b>VAV</b>	Variable Air Volume
<b>IEPE</b>	Integral Electronic Piezoelectric	<b>PSIG</b>	Pounds Per Square Inch-Gage Reference	<b>VDC</b>	Volts Direct Current
				<b>WEEE</b>	Waste Electrical and Electronic Equipment

© 2016 TE Connectivity. All Rights Reserved.

Android is a trademark of Google Inc.

CANopen® is a registered trademark of the CAN in Automation User's Group.

DeviceNet™ is a trademark of ODVA, Inc.

IOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license.

Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.

Noryl® is a registered trademark of Sabic Innovative Plastics IP BV.

Pmod is a trademark of Digilent Inc. and is used under license.

Accustar, ATEXIS, DEUTSCH TruBlue, KPSI, Microfused, UltraStable, IdentiCal, Krystal Bond, Measurement Specialties, MEAS, American Sensor Technologies, AST, TE Connectivity, TE, and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, product and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this brochure are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.



# SMARTER SOLUTIONS START WITH TE SENSORS

[te.com/sensors](http://te.com/sensors)

© 2016 TE Connectivity. All Rights Reserved.

SS-TS-TE100 09/2016

## TE SENSOR SOLUTIONS

For More Information Contact  
TE Connectivity

[te.com/sensorsolutions-contact](http://te.com/sensorsolutions-contact)

[www.te.com](http://www.te.com)