


# FORCE GUIDED RELAY SR4

## SCHRACK | GENERAL PURPOSE RELAYS FORCE GUIDED RELAYS

### INTRODUCTION

TE Connectivity (TE)'s SR4 is a compact and space efficient Force Guided Relays for loads up to 8 A. The optimized ratio between 13 mm width and 16.5 mm height allows miniaturization for horizontally or vertically installed PCBs and modules. With its force guided contact set, the state of a contact can be monitored with a diagnostic coverage of 99% (IEC 61508-2) which makes the SR4 ideal to design safety circuits. The SR4 is produced both in Europe and China to optimally serve local customers.

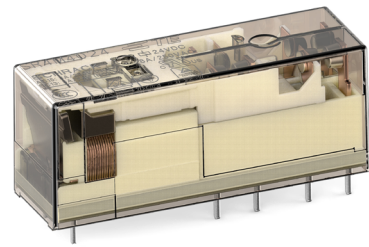

### FEATURES

- 4 pole contact arrangement with either 3 NO (form A) + 1 NC (form B) contact set or 2 NO (form A) + 2 NC (form B) contact set with Force Guided Relays contacts according to IEC 61810-3 (formerly EN50205)
- Compact design and space efficient
- Height of 16.5 mm fits well in 22.5 mm DIN rail housings

### APPROVALS

- VDE Cert. No. 40005334
- UL E214025
- TUV 968/EL 230
- CCC 2020970303000303/2024000303000026



### APPLICATIONS

- Emergency shut-off
- Press control
- Machine control
- Elevator and escalator control
- Safety relays


# SR4

## Force Guided Relays

### CONTACT DATA

Contact arrangement	3 form A + 1 form B contacts 3 NO + 1 NC 2 form A + 2 form B contacts 2 NO + 2 NC
Rated voltage	250 VAC
Maximum switching voltage	400 VAC
Rated current	8 A
Contact material	AgSnO <sub>2</sub>
Contact style	single contact, force guided type A according to EN61810-3 (formerly EN50205)
Minimum recommended contact load	5 V / 10 mA
Initial contact resistance	≤ 100 mΩ at 1 A, 24 VDC ≤ 20 Ω at 10 mA, 5 VDC
Frequency of operation, with/without load	6/150 min <sup>-1</sup>


### MAX. DC LOAD BREAKING CAPACITY

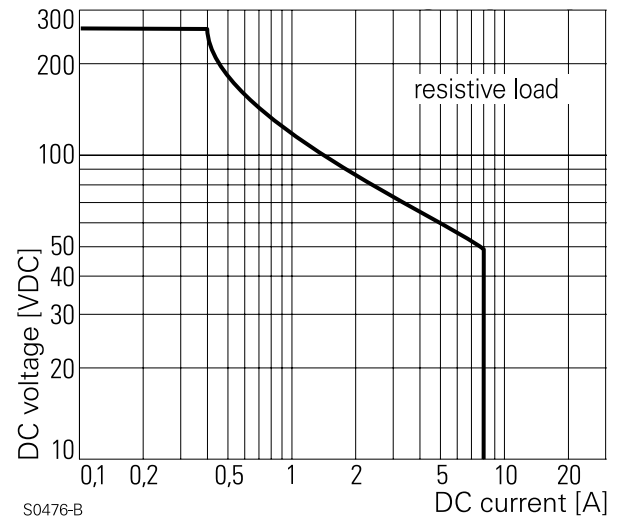

### CONTACT RATINGS FOR SR4

Type	Contact	Load	Cycles
<b>IEC 61810</b>			
SR4	1xA (NO)	8A, 250 VAC, cosφ=1, 70 °C	20x10 <sup>3</sup>
SR4	1xB (NC)	5A, 250 VAC, cosφ=1, 70 °C	
<b>UL61810-1 (former UL 508)</b>			
SR4	A/B (NO/NC)	8 A, 250 VAC, general purpose, 70 °C	6.000
SR4	1xA (1xNO)	R300, B300	
SR4	1xB (1xNC)	R300	
<b>EN60947-5-1</b>			
SR4	1xA/1xB (1xNO/1xNC)	3 A, 24 VDC, DC13	6.050
SR4	1xA (1xNO)	3 A, 250 VAC AC-15	
More ratings and information see product specification 2158002			
Mechanical endurance	10x10 <sup>6</sup> operations		

### TYPICAL ELECTRICAL ENDURANCE

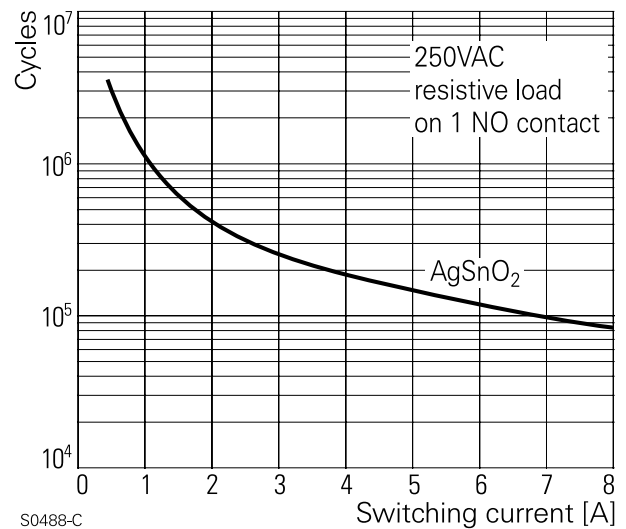

**COIL DATA**


Coil voltage range	5 to 110 VDC
--------------------	--------------

**COIL VERSIONS, DC-COIL**

Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance $\Omega \pm 10\%$	Rated coil power mW
005	5	3.8	0.5	31	806
006	6	4.5	0.6	45	800
009	9	6.8	0.9	101	802
012	12	9.0	1.2	180	800
015	15	11.3	1.5	281	801
018	18	13.5	1.8	405	800
021	21	16.0	2.1	551	800
024	24	18.0	2.4	720	800
036	36	27.0	3.6	1620	800
040	40	30.0	4.0	2000	800
048	48	36.0	4.8	2880	800
060	60	45.0	6.0	4500	800
085	85	63.8	8.5	9031	800
110	110	83.0	11.0	15125	800

All figures are given for coil without pre-energization, at ambient temperature +23 °C.

**COIL OPERATING RANGE DC**

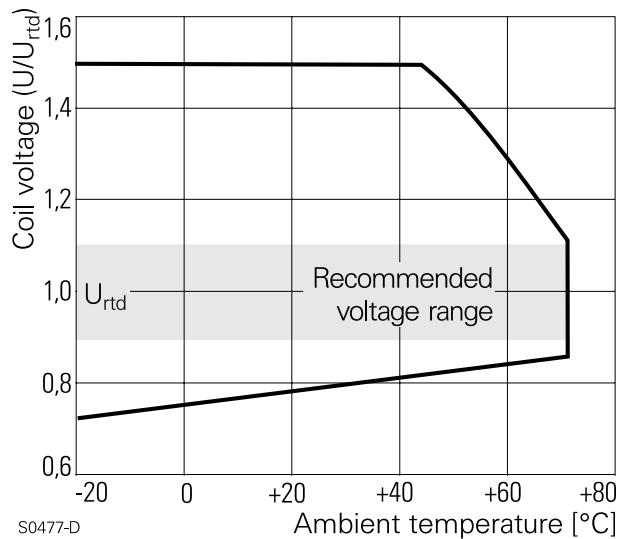


**INSULATION DATA**

Initial dielectric strength	
between open contacts	1500 Vrms
between contact and coil	4000 Vrms
between adjacent contacts	2500 Vrms
Clearance/creepage	
between open contacts	microdisconnection
between contact and coil	$\geq 10/10$ mm
between adjacent contacts	$\geq 3/3.5$ mm
Insulation to EN 62477-1 (former EN 50178), type of insulation	
between contact and coil	reinforced
between adjacent contacts	basic

**OTHER DATA**

Material compliance	EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at <a href="http://www.te.com/customer-support/rohssupportcenter">www.te.com/customer-support/rohssupportcenter</a>
Ambient temperature	-25 °C to +70 °C
Category of environmental protection	
IEC 61810	RTIII
Weight	16 g
Resistance to soldering heat THT	
IEC 60068-2-20	260 °C/5 s
Packaging/unit	
Czech Republic	tube/10 pcs., box/250 pcs.
China	tube/14 pcs., box/420 pcs.

**DIMENSIONS (Unit: mm)**

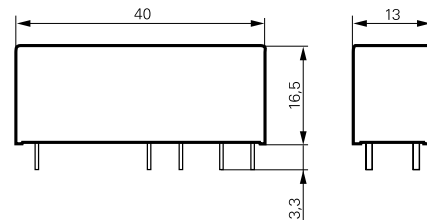

# SR4




## Force Guided Relays

### PCB LAYOUT / TERMINAL ASSIGNMENT

Bottom view on solder pins

2 form A + 2 form B, 2 NO + 2 NC contacts

3 form A + 1 form B, 3 NO + 1 NC contacts

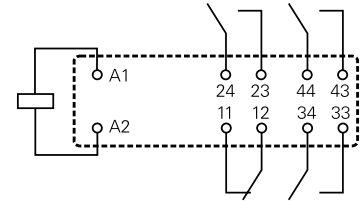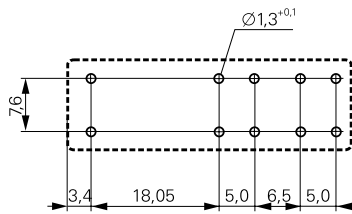

### ORDERING INFORMATION

**Part Number**  
SR4 D 4 012

#### Chassis size

**SR4** Relay with force guided contacts SR4

#### Contact arrangement

<b>D</b>	2 form A + 2 form B contacts (2 NO + 2 NC)
<b>M</b>	3 form A + 1 form B contacts (3 NO + 1 NC)

#### Coil

Coil code: please refer to coil versions table (e.g. 012=12 VDC)

#### Contact material

**4** AgSnO<sub>2</sub>

Other types on request.

### PRODUCT INFORMATION

Product code	Version	Contact configuration	Contact material	Coil	Part Number	
					For Global markets *)	For AP market **)
SR4D4005	4 pole relay with force guided contacts	2 form A + 2 form B, 2 NO + 2 NC contacts	AgSnO <sub>2</sub>	5 VDC	<a href="#">7-1415054-1</a>	
SR4D4006				6 VDC	<a href="#">8-1415054-1</a>	
SR4D4009				9 VDC	<a href="#">9-1415054-1</a>	
SR4D4012				12 VDC	<a href="#">1415055-1</a>	<a href="#">2071571-4</a>
SR4D4018				18 VDC	<a href="#">1-1415055-1</a>	<a href="#">2071571-6</a>
SR4D4021				21 VDC	<a href="#">2-1415055-1</a>	
SR4D4024				24 VDC	<a href="#">3-1415055-1</a>	<a href="#">2071571-8</a>
SR4D4036				36 VDC	<a href="#">4-1415055-1</a>	
SR4D4040				40 VDC	<a href="#">5-1415055-1</a>	
SR4D4048				48 VDC	<a href="#">6-1415055-1</a>	<a href="#">1-2071571-1</a>
SR4D4060				60 VDC	<a href="#">7-1415055-1</a>	
SR4D4085				85 VDC	<a href="#">8-1415055-1</a>	
SR4D4110				110 VDC	<a href="#">9-1415055-1</a>	<a href="#">1-2071571-5</a>

**PRODUCT INFORMATION CONTINUED..**

Product code	Version	Contact configuration	Contact material	Coil	Part Number	
					For Global markets *)	For AP market **)
SR4M4005	4 pole relay with force guided contacts	3 form A + 1 form B, 3 NO + 1 NC contacts	AgSnO <sub>2</sub>	5 VDC	<a href="#">5-1415053-1</a>	
SR4M4006				6 VDC	<a href="#">6-1415053-1</a>	
SR4M4009				9 VDC	<a href="#">7-1415053-1</a>	
SR4M4012				12 VDC	<a href="#">8-1415053-1</a>	<a href="#">5-2071571-4</a>
SR4M4018				18 VDC	<a href="#">9-1415053-1</a>	<a href="#">5-2071571-6</a>
SR4M4021				21 VDC	<a href="#">1415054-1</a>	
SR4M4024				24 VDC	<a href="#">4-1415053-1</a>	<a href="#">5-2071571-8</a>
SR4M4036				36 VDC	<a href="#">1-1415054-1</a>	
SR4M4040				40 VDC	<a href="#">2-1415054-1</a>	
SR4M4048				48 VDC	<a href="#">3-1415054-1</a>	<a href="#">6-2071571-1</a>
SR4M4060				60 VDC	<a href="#">4-1415054-1</a>	
SR4M4085				85 VDC	<a href="#">5-1415054-1</a>	
SR4M4110				110 VDC	<a href="#">6-1415054-1</a>	<a href="#">6-2071571-5</a>

\*) Country of origin Czech Republic

\*\*) Country of origin China

**Notes:**

1. Datasheets and product specification according to IEC 61810-1 and to be used only together with the 'Definitions' section.
2. Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at <http://relays.te.com/definitions>.
3. Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.
4. For general information on Force-Guided-Relays and our portfolio, please visit <http://www.te.com/fgl>.
5. For more detailed product-specific-information (such as B10d values, switching times, etc) please contact our Product Information Center (<https://www.te.com/usa-en/customer-support/customer-service.html>) and ask for the product-specification.

**te.com**

©2024 TE Connectivity Ltd. All Rights Reserved.

TE Connectivity, TE connectivity (logo) and Every Connection Counts are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any changes to the information contained herein without prior notice. TE Connectivity assumes only those obligations set forth in the terms and conditions for this product and shall in no event be liable for any incidental, indirect, or consequential damages arising out of the sale, resale, use, or misapplication of the product. TE expressly disclaims any implied warranties with respect to the information contained herein, including, but not limited to, implied warranties of merchantability or fitness for a particular purpose. Dimensions, specifications and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications and/or information. Users of TE Connectivity products must make their own assessment as to whether the respective product is suitable for the respective desired application.

06/24 ED

