


Automotive Relays High Voltage Contactors

EVC 250-800 Main Contactor

- Limiting continuous current 250A at 85°C
- Suitable for voltage levels up to 900VDC
- High peak current carrying capability up to 6000A¹)

Typical applications

- DC high voltage high current applications
 Main contactors for hybrid, full battery electric vehicles and fuel-cell cars
- Battery charging systems



Contact Data	
Contact arrangement	1 form X (SPST NO DM)
Rated voltage	800VDC
Maximum switching voltage	900VDC, dep. on load characteristics1)
Rated current	load cable 50mm ²
Forward load current direction	250A
Limiting continuous current	load cable 50mm ²
85°C	250A
Limiting short time current	load cable 50mm ²
85°C	400A 5min
	600A 1min
	6000A 20ms
Limiting make current	5x104x250A at 50VDC

Contact Data (continued)	
Limiting break current	1x650A at 800VDC
Forward load current direction	5000x100A at 800VDC
altitude max 5500m	5x10 ⁴ x50A at 800VDC
Limiting break current	1x415A at 300VDC
Reverse load current direction	20x50A at 800VDC
altitude max 5500m	1x104x20A at 800VDC
Voltage drop (initial) at 100A	max. 40mV after 60s ²⁾
Voltage drop (over lifetime) at 250A	typ. 50mV after 60s ³⁾
Operate time ⁴⁾	max. 25ms
Release time ⁴⁾	max. 10ms ⁵⁾
Mechanical endurance	>2x10 ⁵ ops.

¹⁾ Please contact TE Connectivity for details.

²⁾ Measurement condition: 370A for 2s followed by 100A for 60s.

³⁾ Max. 600mV with current >1A.


⁴⁾ At rated coil voltage.

⁵⁾ Without arc duration (only mechanical contact opening considered).




EVC 250-800 Main Contactor (Continued)


Coil operating range (12V single coil version)

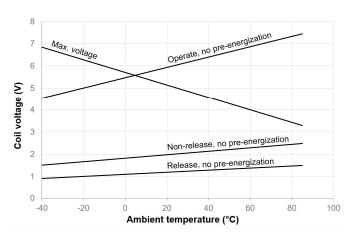

Coil operating range (12V dual coil version)



Coil operating range (24V dual coil version)

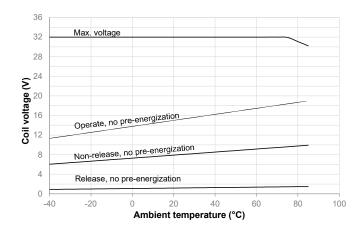

Coil Da	ata ⁶⁾					
Un-economized: single coil version for external economization ⁷⁾						
Coil	Rated	Operate	Max. cont.	Non-release	Coil	
code	voltage	voltage	voltage	voltage	resistance	
	[VDC]	[VDC]	[VDC]	[VDC]	$[\Omega]$	
					±10%	
0101	12	6.0	5.0	2.0	3.9	

Recommended parameters for external economization with PWM ⁷⁾						
Min.	Controlled c	urrent PWM	Controlled volta	age equivalent		
frequency	Max. current	Min. current	Max. voltage	Min. voltage		
[kHz]	[A]	[A]	[V]	[V]		
15	1.0	0.5	5.9	2.6		

Econo	Economized: dual coil version with internal switch ⁸⁾⁹⁾							
Coil	Rated	Operate	Nominal inrush	Non-release	Max.	Coil		
code	voltage	voltage ¹⁰⁾	current	voltage	voltage	resistance		
	[VDC]	[VDC]	[ADC]	[VDC]	[VDC]	$[\Omega]$		
						±10%		
0102	12	7.6	4.7	4.0	16.0	$2.6/26^{11}$		
0112	24	15.2	4.8	8.0	32.0	5.0/7911)		

Insulation Data	
Initial dielectric strength	
between open contacts	4000VDC / 3mA
between contact and coil	4000VDC / 3mA
Insulation resistance after abuse test	
between open contacts	>200M Ω
between contact and coil	>200M Ω
Clearance/creepage	
acc. IEC 60664-1 (2007) for	over voltage category I,
	pollution degree 2
Max. altitude	5500m
Other Data	
Ambient temperature	-40°C to +85°C
Degree of protection	
IEC 60529 (2000-09)	IP54 ¹²⁾
Vibration resistance (functional)	
IEC 60068-2-6 (2007-12)	10 to 500Hz, min. 10g
sine sweep	No change of switching state >10µs.

vibration resistance (functional)	
IEC 60068-2-6 (2007-12)	10 to 500Hz, min. 10g
sine sweep	No change of switching state >10µs.
Shock resistance (functional)	
IEC 60068-2-27(2008-02)	closed: 11ms, min. 40g
half sine	open: 11ms, min. 20g
	No change of switching state >10µs.
Terminal type	connector (coil) and
	screw (load)
Weight	approx. 525 / 580g (18.5 / 20.5oz),
	depending on version
Packaging unit	20 pcs.

6) All values valid for 23°C ambient temperature with no pre-energization if not noted otherwise. Refer to diagram for values at other temperatures.


- 7) Requires external coil economization that must start 100-300ms after coil activation. Avoid repetitive switching. Minimum clamp voltage 60V (see circuit recommendation).
- Demagnetization voltage is clamped at ~70V. External coil suppression is not necessary and could reduce switching capability. Contact TE Connectivity for details.
- 9) Max. duty cycle 0.5Hz.
- 10)Max. rise time 100ms.
- 11) 2.6 $\!\Omega$ coil / 5.0 $\!\Omega$ coil is switched off internally max. 250ms after pull-in
- 12)Protection class applicable for all mounting orientations except load terminals upwards.



EVC 250-800 Main Contactor (Continued)


Terminal Assignment

Forward load current direction




Circuit recommendation for coil 0101


Always use low-side switch "Enable" for switch off





Dimensions


Side Mount Version











- Permitted torque 6Nm max. One-time mounting only, no recurring screw fastening permitted.
 Socket Housing
- TE Interface 2 pos. MQS code A, appropriate for socket housing 2 pos. MQS, TE part no. 1-967644-1 Prescribed wire cross section = 0.35mm² min.
- 3) Mount load connections first.

Tolerances ISO2768-cL.


Consult TE Connectivity for detailed mounting instructions.




EVC 250-800 Main Contactor (Continued)


Dimensions


Bottom Mount Version











- 1) Permitted torque 6Nm max. When min. 5 turns
- Socket Housing
 TE Interface 2 pos. MQS code A,
 appropriate for socket housing 2 pos. MQS,
 TE part no. 1-967644-1
 Prescribed wire cross section = 0.35mm² min.
- 3) Srew and washer and srew with washer are recommended for fastening.

Mount load connection first.

Tolerances ISO2768-cL.

Consult TE Connectivity for detailed mounting instructions.

Product code structure V23720 0101 Typical product code -A -B 0 0 1 **Designator** V23720 EVC 250-800 Main Contactor **Relay Version** Side mount fixation В Bottom mount fixation Coil 0101 12V single coil for external economization 12V dual coil with internal switch 0112 24V dual coil with internal switch Rated voltage 800VDC В **Contact material** Silver alloy Special features None 0 **Coil connector** MQS sealed

Product Code	Arrangement	Coil Suppr.	Circuit	Coil	Relay Type	Resistance	Part Number
V23720-A0101-B001	SPST-NO-DM	External ≥60V	No economizer	12VDC	800VDC	3.9Ω	2-1904136-5
V23720-A0102-B001	SPST-NO-DM	Internal	Coil switch	12VDC	800VDC	Double coil 2.6/26Ω	7-1904137-6
V23720-A0112-B001	SPST-NO-DM	Internal	Coil switch	24VDC	800VDC	Double coil 5.0/79Ω	2-2317670-1
V23720-B0101-B001	SPST-NO-DM	External ≥60V	No economizer	12VDC	800VDC	3.9Ω	2340516-1