

4 POSITION, AMP MCP2.8K, RECEPTACLE HOUSING, RADIAL SEAL
PART NO: 0-1718562-1



Figure 1: Contact insertion:

1 PRODUCT TABLE

WIRE (TYPE FLR) mm ²	Contact	WIRE Seal
0.35	0-1241392-1	0-0963294-1
0.5	0-1241394-1	0-0963294-1
0.75	0-1241394-1	0-0963294-1
1.0	0-1241394-1	0-0963294-1
1.5	0-1241396-1	0-0963293-1
2.5	0-1241396-1	0-0963292-1
Dead end plug		0-0828922-1

Mating part acc. to 114-94051



Figure 2: Retainer closed: (shifting length: 3.0mm)

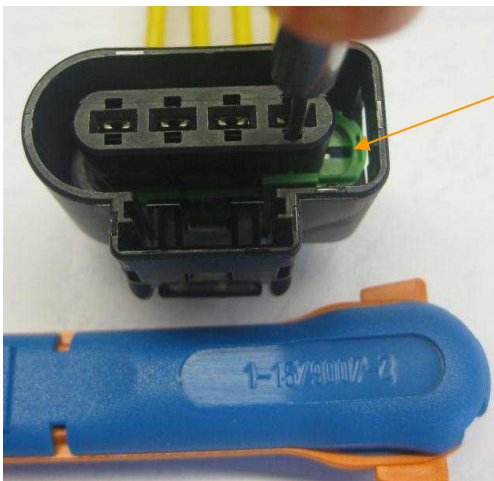


Figure 3: Contact extraction: take small screw driver
for retainer shifting

2 APPLICATION SEQUENCE

- 2.1 Contact insertion (Fig. 1)
- insert contact
 - close retainer after contact insertion (Fig. 2)
- 2.2 Contact extraction
- open retainer
 - insert extraction tool 1-1579007-2 (depth 7.65mm) (Fig. 3)
 - extract contact