



460-470 MHZ 9 DBI OMNIDIRECTIONAL ANTENNA FG4607

FIBERGLASS BASE STATION ANTENNAS FEATURE INDUSTRY LEADING DESIGN COMPONENTS THAT PERFORM IN EXTREME CONDITIONS

The Laird FG4607 omnidirectional base station antenna incorporates a collinear design that is enclosed in high density fiberglass, which is covered with a protective ultraviolet inhibiting coating. The radiating elements are carefully phased to provide maximum gain in the horizontal plane. The mounting sleeves are tuned to eliminate RF currents from the transmission line, resulting in a “cold” sleeve that allows for greater freedom in mounting. The antenna’s high quality and well-focused beam provides the best efficiency with highest gain.

FEATURES

- High gain 7 dBd (9dBi)
- Every FG fiberglass base antenna is tested on a network analyzer before shipping to assure the best performance
- Custom UV protection coating
- Durable gold anodized sleeve and cap with N-female connector
- FedEx/UPS Shippable

MARKETS

- Omnidirectional outdoor antennas used in commercial, public safety, and government applications around the globe.
- Typical applications include land based and marine radio and voice and data transmission


MECHANICAL SPECIFICATION

Height	106-1/4"
Diameter	<6lbs
Weight	<3 lbs
Rated Wind Velocity:	125 mph (210 kph)
Rated Wind Velocity(with 0.5" radial ice):	85 mph (137 kph)
Lateral Thrust @ 1.25 mph wind velocity:	57 lbs (26 kg)
Mounting Information:	Pole Mount, FM2 Mounting Kit (sold Separately)
Operating temperature:	-30°C to +85°C (-22°F to 185°F)

ELECTRICAL SPECIFICATION

Frequency Range	460-470 MHz
VSWR	<2.1 Max
Nominal Gain	7 dBd (9 dBi)
Maximum Power	100 W
Nominal Impedance	50Ω
Polarization	Vertical
Pattern	Omnidirectional
Half-Power Beamwidth (Elevation° x Azimuth°)	26° x 360°
Coaxial Cable Length & Type	None
Termination	N-Female connector
Lightning Protection	Lightning Arrestor LABH350NN (Sold Separately)

ELEVATION PATTERN (Y, Z OR H-PLANE)

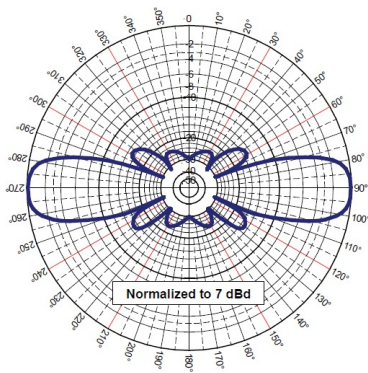

Lightning Arrestor
LABH350NN
(Sold Separately)



FM2 Mounting Kit (Sold
separately)

te.com

TE, and TE connectivity (logo) are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE Connectivity product is installed. Useful lifetime of the original end product may vary but is not warranted to exceed one (1) year from the original date of the end product purchase.

©2022 TE Connectivity. All Rights Reserved.

09/22 Original

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015