



THE LUMAWISE ALR 7000 SERIES IS THE RESULT OF OVER FIFTY YEARS OF EXPERIENCE DESIGNING AND DELIVERING HIGHLY-RATED PHOTOCONTROLS AND OTHER LIGHTING ACCESSORIES AROUND THE WORLD.

LUMAWISE ALR 7000 SERIES

PHOTOCONTROL

TE Connectivity's (TE) LUMAWISE ALR 7000 series photocontrol provides a utility grade, high performance, multi-volt control for demanding roadway, street and area lighting applications.

TE's LUMAWISE 7000 series photocontrol design surpasses 20,000 On/Off operation cycles per the ANSI C136.10 standard providing an expected life range between 8 to 10 years.

As an option in our electronic photocontrols, TE uses an IR filtered phototransistor which gives a human eye response along with long term, drift-free light sensing for the life of the control.

As is the case with all of our electronic controls, the 7000 series utilizes our interlocking base/cap design for excellent environmental protection. With additional part numbers, the LUMAWISE 7000 Series now provides two photocontrols with surge protection up to 1025J and two photocontrols with ingress protection up to IP66.

BENEFITS

- Designed for LED and HID lighting
- Supports multiple input voltages
- High temperature housings and components
- 20mm, 15kA, 480 Joule MOV, standard
- Meets or exceeds ANSI C136.10
- Rated life: 10 years

LUMAWISE ALR 7000 SERIES

PHOTOCONTROL

APPLICATIONS

- Street and area lighting
- Roadway lighting
- Commercial outdoor lighting (i.e. parking lots, car dealerships)

ELECTRICAL

- Voltage rating: 105 – 305 VAC
- Frequency: 50/60 Hz
- Power consumption: Less than 0.5 watts at 120 VAC
- Relay rating: 30 AMP general purpose relay
- Load rating: Resistive: 1000 W Tungsten: 1800 VA Electronic ballast: 2 A
- Operating light levels: Standard 1.5 Fc on (optional 1 – 2.6 Fc)
- Time delay ON/OFF: Instant on, 2 – 5 second delay OFF
- OFF/ON ratio: 1.5:1
- Fail mode: ON
- Surge protection: Up to 1025J
- Light sensor: Non-drifting phototransistor

MECHANICAL

- Operating temperature rating: -40°C to +65°C at 96% RH
- Rated life: 10 years
- Control: DC electromagnetic switch exceeds 20,000 ON/OFF per ANSI C136.10
- Ingress protection: Up to IP66

MATERIALS

- Base: High temperature polyester (PBT)
- Gasket: Cross-linked polyethylene
- Cover: High impact polypropylene with UV stabilized polycarbonate window
- Connection: 3 pole locking type with brass contacts
- Dimensions: IP54 version: Approximately 83mm diameter X 45mm high (not including contacts) IP66 version: Approximately 82mm diameter X 56mm high (not including contacts)

SPECIFICATIONS

- ANSI C136.10
- Meets the CENELEC HD 629.1 frequency




PRODUCT INFORMATION

Part Number	Descriptive PN	Color	Energy	Current	Certification
HK379T-000	ALR-7060-VPS	Gray	480J	15kA	-
EN1865-000	ALR-7060-VPS-BK	Black	480J	15kA	-
L2134Z-000	ALR-7090-VPS	Blue	480J	15kA	-
21244H-000	ALR-7090-VPS-BK	Black	480J	15kA	-
FR626C-000	ALR-7090-VPS-BR	Brown	480J	15kA	-
4Z9454-000	ALR-7090-VFS	Blue	480J	15kA	-
CS8870-001	ALR-7090-VF3-BK	Black	480J	15kA	-
2401413-1	ALR-7090-MFS	Blue	800J	20kA	UL
2401413-2	ALR-7090-HFS	Blue	1025J	20kA	UL
2388948-1	ALR-7090-MFS-IP66	Blue	800J	20kA	UL
2388949-1	ALR-7090-MPS-IP66	Blue	800J	20kA	UL

LUMAWISE ALR 7000 SERIES

PHOTOCONTROL

The 7000 series offers almost unlimited options ensuring your lighting network needs will be met.

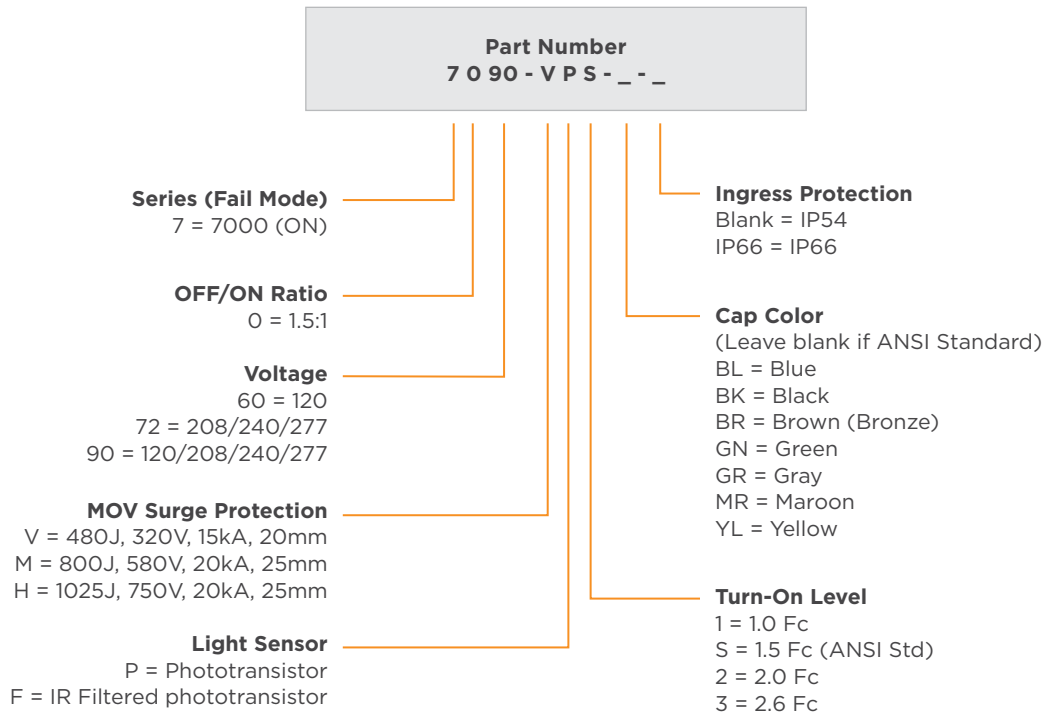

ANSI Standard Cap Colors

120V	Gray
208 / 240 / 277V	Maroon
120 / 208 / 240 / 277V	Blue

If any additional part numbers are needed contact [Product and Customer Support](#).

te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

©2024 TE Connectivity. All Rights Reserved.

12-24