

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D1	REVISED PER ECR-20-011780	14SEP2020	SG	HL

ES2000 Special Sizes Dual Wall Heat-Shrinkable Tubing

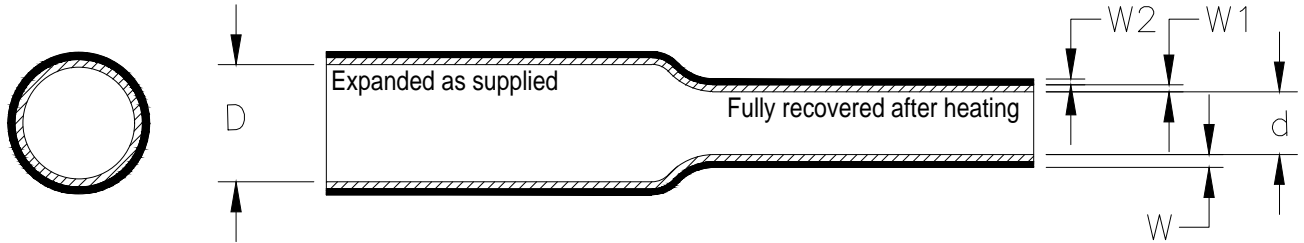


Table 1: Dimensions mm (inches)

Size	As Supplied		As Recovered							
	Expanded I.D. Including Core (D)		Maximum Recovered I.D. Including Core (d)		Recovered Total Wall (W)		Minimum Recovered Adhesive Wall (W1)		Minimum Recovered Jacket Wall (W2)	
	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.
No.5	7.42 ± 0.30	0.292 ± 0.012	1.65	0.065	1.75 ± 0.23	0.069 ± 0.009	0.91	0.036	0.84	0.033
No.6	8.46 ± 0.18	0.333 ± 0.007	1.65	0.065	1.75 ± 0.23	0.069 ± 0.009	0.91	0.036	0.84	0.033
No.7	11.05 min	0.435 min	2.41	0.095	2.11 ± 0.20	0.083 ± 0.008	1.14	0.045	0.97	0.038
No.8	12.32 min	0.485 min	2.41	0.095	2.11 ± 0.20	0.083 ± 0.008	1.14	0.045	0.97	0.038
No.9	15.9 min	0.625 min	4.45	0.175	2.61 ± 0.20	0.103 ± 0.008	1.37	0.054	1.04	0.041

Color: Jacket shall be black; adhesive liner shall be amber.

Marking: Per customer order.

Properties: Except as specified above, these special ES2000 sizes will meet all requirements of TEC-108-120024

© 2017 TE Connectivity . All Rights Reserved.



DIMENSIONS: INCHES	DWN	J. Bitter	19DEC2017	MATERIAL	-	FINISH	-
	CHK	T. Licko	-	TE Connectivity			
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	T. Licko	-				
0 PLC ± -	PRODUCT SPEC	-	NAME	ES2000 Special Sizes Dual Wall Heat-Shrinkable Tubing			
1 PLC ± -	APPLICATION SPEC	-	SIZE				
2 PLC ± -	WEIGHT	-	CAGE CODE	06090	DRAWING NO	ES2000_SPECIAL_SIZES	
3 PLC ± -			RESTRICTED TO	-			
4 PLC ± -							
ANGLES ± -							
		CUSTOMER DRAWING		SCALE	None	SHEET	1 OF 1
							REV D1