

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	16JAN2024	JZ	TD


1. TERMINAL PITCH=24.33±0.10mm.
2. CONTINUOUS STRIP ON REELS.
3. MATING TAB THICKNESS: 0.77mm~0.84mm.
4. WIRE RANGE: SEE TABLE.
SINGLE WIRE SIZE SHOULD BIGGER THAN 0.32mm.

GENERAL APPLICATION GUIDELINE MUST BE FOLLOWED
AS SPECIFIED IN CATALOG # 82221.



- 5

CRIMP WIDTH:2.29mm F AMPLIVAR, CMA RANGE: 900~3300
CRIMP HEIGHT(±0.05)= (TOTAL CMA+7,070)/152,350*25.4mm
- 6



CRIMP WIDTH:2.79mm F AMPLIVAR, CMA RANGE: 3300~7300
CRIMP HEIGHT(±0.05)= (TOTAL CMA+10,145)/187,410*25.4mm

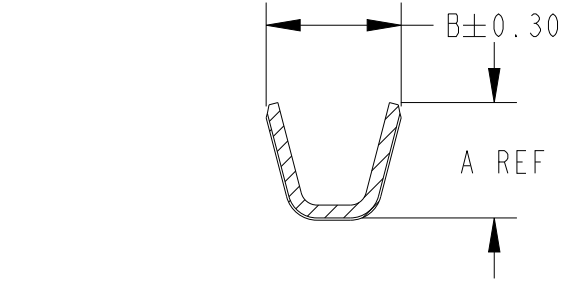


SECTION N - N

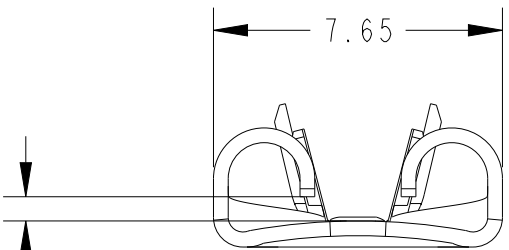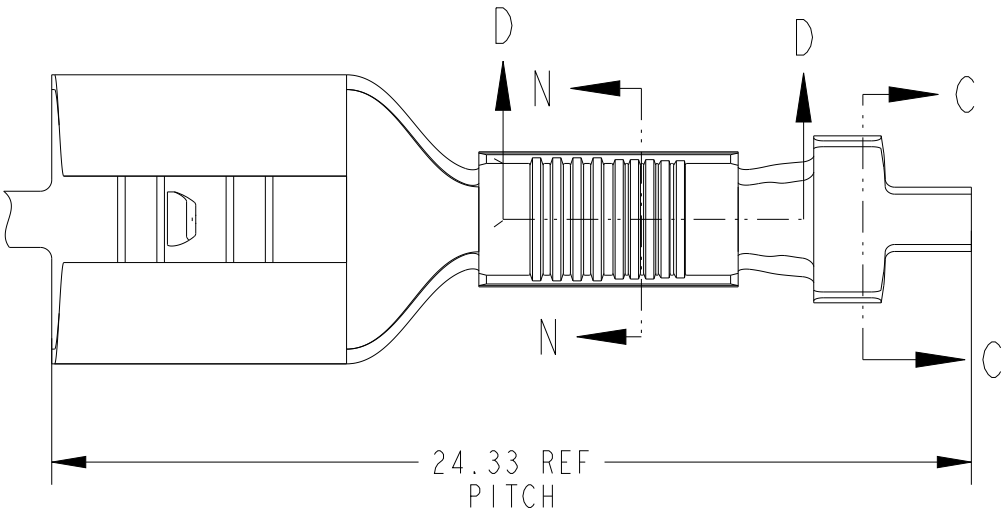

FITS 250 SERIES
FASTON TAB

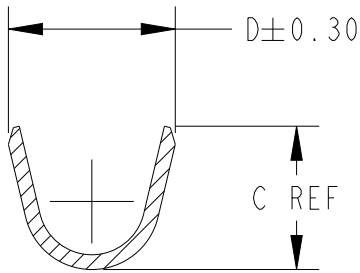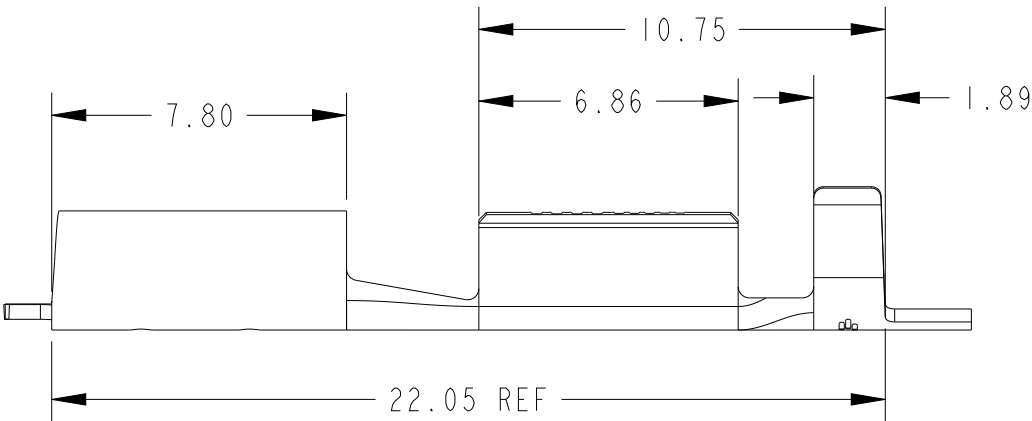


SECTION C - C

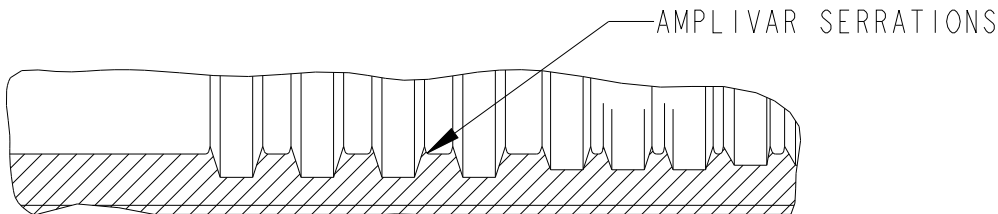

SECTION D - D
SCALE 20:1

DIRECTION FOR TOP OF REEL

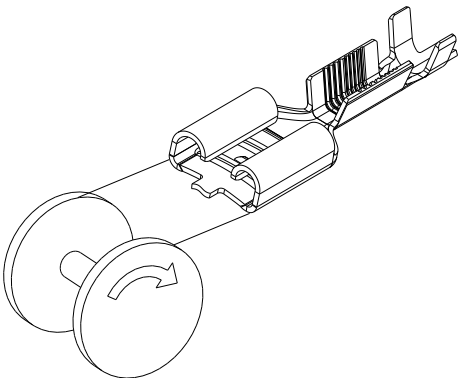

5.34	4.51	4.89	4.21	3300-7300	2415574-4/6
4.42	3.79	3.57	3.05	900-3300	2415574-2/5
DIM D	DIM C	DIM B	DIM A	CMA RANGE	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± 1 PLC ±0.3 2 PLC ±0.3 3 PLC ± 4 PLC ± ANGLES ±
MATERIAL TIN-BRASS	FINISH POST-TIN

DWN JIMMY ZHANG 16JAN2024	CHK JUSTIN HUANG 16JAN2024	APVD TIM DING 16JAN2024
PRODUCT SPEC 108-160763		
APPLICATION SPEC 114-160763		
WEIGHT -		
CUSTOMER DRAWING		



NAME
RECEPTACLE, FASTON,
AMPLIVAR, .250 SERIES

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2415574	-