

COIL: @ 25° C	
RESISTANCE	675 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	1.47 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE TIME 5 MS MAX.
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

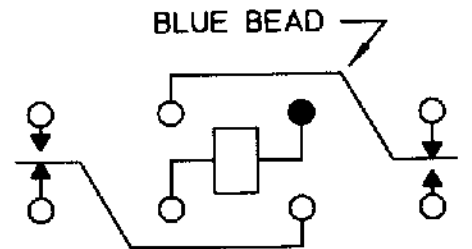

CONTACT RATING: LOW LEVEL TO 3 AMPS
RESISTIVE 28 VDC 100,000 OPERATIONS

DR. R.B. 8/25/98 CK. 8/25/98

COMMUNICATIONS
INSTRUMENTS, INC.

CUST. C.I.I. STD.
CUST. NO. _____

TYPE "FW" RELAY

FW1209G00