



S2401240P12NF

2.4-2.5 GHz 12 dBi, 40 H-plane Panel Antenna

INDOOR / OUTDOOR LOW PROFILE DIRECTIONAL ANTENNA


Laird Technologies' S2401240P12NF antenna offers high-gain and a narrow H-plane beamwidth and is a perfect choice in instances when an attractive, low profile high-gain directional antenna is required. The antenna's neutral, contemporary housing blends seamlessly into any indoor or outdoor environment and can be mounted to interior and exterior wall surfaces, masts, and other common mounting platforms. The antenna is only 6 x 6 x 1.25 inches in size making it easy to work into any indoor or outdoor WLAN or broadband wireless application. The antenna can either be mounted directly to a wall surface or can be mounted using an articulating mount that allows for adjustment in both the azimuth and the elevation planes.

FEATURES

- High gain, low profile
- Indoor/outdoor use
- Various connector types and cable lengths available

MARKETS

- Enterprise WLAN systems
- Wireless bridges
- Industrial and educational campuses
- Business and healthcare complexes
- Systems that require a low profile, directional panel in the 2.4-2.5 GHz
- WiMAX

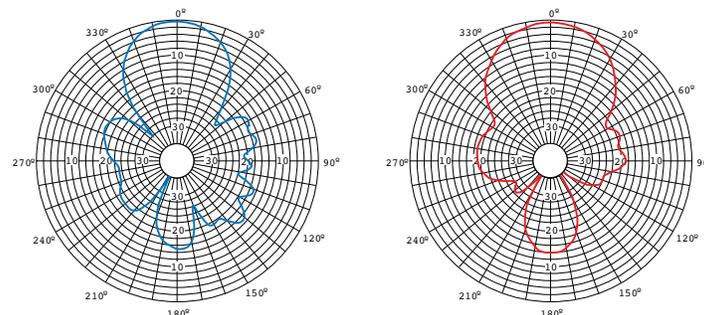

— E-Plane
— H-Plane

PARAMETER	SPECIFICATION
Frequency Range (MHz)	2400-2500
Gain dBi (with 12 in cable)	12
E-Plane 3 dB Beamwidth	35°
H-Plane 3 dB Beamwidth	40°
Impedance (Ohms)	-
Weight oz (kg) (with 12 in cable)	11 (0.13)
VSWR max	1.5:1
Mount Style	Wall
Dimensions	6 x 6 x 1.25 in
Enclosure	Polycarbonate
Power (Watts)	25
RF Connector	Type N (f)
Pigtail	12 in standard

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE, and TE connectivity (logo) are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE Connectivity product is installed. Useful lifetime of the original end product may vary but is not warranted to exceed one (1) year from the original date of the end product purchase.

©2022 TE Connectivity. All Rights Reserved.

08/22 Original